### **Downlighting**

### LIGHTOLIER

### Calculite LED 3"



C3RDL Round downlight

Calculite LED 3" features industry leading visual comfort, excellent uniform illumination over time, and patented installation flexibility. Optical cutoff of 50° coupled with exceptional 2 Step MacAdam ellipse color consistency make the Calculite 3" downlight an ideal choice for open office, retail, hospitality, healthcare, and residential applications.

roject:
ocation:
at.No:
ype:
ty:
. L

Buy American Act of 1933 (BAA) Compliant luminaire\*: Complete luminaire = Frame-BAC + Engine-BAC + Trim-BAC

Note: For remodeler installations, order light angine and trim only (no frame needed)

 $\star$  BAA compliance requires that BAC option be selected for each of frame, engine, and trim. Frame, engine, and trim will be shipped together as a single product. Accessories (optional) are not currently BAA-compliant.

### Follow the ordering guidelines below. Each step is a separate order line.

Step 1	Frame: Ordered & shipped separately.		
	Frame 3R		Example: 3RN
Step 2	Engine & Trim: Ordered & shipped as a single product.		
	Engine C3L	-C3R	Example: C3L10935MZ10U-C3RDLCC
Step 3 (optional)	Accessories: Ordered & shipped separately.		

Traine	Note. For remodeler installations, order light engine and trim only (no traine needed).				
Series	Installation	Voltage/Options			
3R					
3R Uniframe 3" round frame	N New Construction Non-IC	- Universal 120/277/347V		Chicago plenum <sup>8</sup> Emergency, 6W Self-Test/Self-Diagnostic <sup>1</sup>	
	A AirSeal IC (1000lm max)	- Standard Universal 120/277/347V	S	Shallow Universal 120/277/347V <sup>2</sup>	

**Engine** example: C3L10930NZ10US

Series	Lumens	CRI/CCT	Beam	Dimming	Options	Voltage	Plenum	
C3L								
C3L Calculite 3" light engine	05 500 lm 07 750 lm	927 90 CRI / 2700 K 930 90 CRI / 3000 K	N Narrow (33°) M Medium (55°)	<b>Z10</b> 0-10 V 1%	None D2O Dim to Off	U 120 V/277 V 3 347 V (Z10 only)	- Standard	
	10 1000 lm 15 1500 lm <sup>3</sup> 18 1800 lm <sup>3</sup>	935 90 CRI / 3500 K 940 90 CRI / 4000 K	<b>W</b> Wide (62°)	<b>W</b> Wide (62°)	L01	U 120V/277V		
	10 1000lm 9D2W 90CRI/ 3000-1800K		D DALI 0.1%	None LIN Linear	<b>U</b> 120 V/277 V			
		For new const. (N frame and Z10 engine only)			SOL 0-10V 0.1% DMX Digital Multiplex w/ RDM 0.1%	DMX Digital Multiplex LIN Linear	<b>U</b> 120V/277V	
				E Forward/Reverse P	hase	1 120V		
				RA Integral Interact Pr	o RF sensor⁵	<b>U</b> 120V/277V		
	<b>07</b> 750 lm	927 90 CRI / 2700 K	N Narrow (33°)	<b>Z10</b> 0-10 V 1%	None	<b>U</b> 120V/277V	R Remodeler <sup>6</sup>	
	10 1000 lm	M Medium (55°) W Wide (62°)	E Forward/Reverse Ph	ase	1 120V	S Shallow <sup>2</sup>		













evample: 3RAS

Frame

### Round downlight

Trim example: C3RDLBTF

Series C3R	Style DL	Reflector	Flange	Flange	Options
C3R Calculite 3" round trim	<b>DL</b> Downlight	BK Black (anodized) CD Comfort clear diffuse CL Specular clear CZ Champagne bronze (anodized) CC Comfort clear	<ul> <li>White (matte)</li> <li>P Matching reflector</li> <li>F Flangeless<sup>7</sup></li> </ul>	- Standard depth with 50° cutoff	None     IEM6 Trim mounted     EM test switch
		WH White (matte)	<ul> <li>White (matte)</li> <li>F Flangeless<sup>7</sup></li> </ul>		(standard depth trims only)
		WT Textured white (painted)	P Matching reflector F Flangeless <sup>7</sup>		
		BT Textured black (painted) BZ Bronze (painted) D Aluminum diffuse (painted)	White (matte)     Matching reflector     F Flangeless <sup>7</sup>		

### Accessories (order & install separately)

Interact Ready System Bridge (compatible with 0-10V, see SWCS spec sheet). Requires IRT9015 IR remote & Interact Pro App for commissioning.

CAEM6 Field installable Bodine BSL6 6W battery pack with self-test/self-diagnostic for use with new construction frames, 120-277V (see page 3 for details)

**CA3RFT** Mud-in ring for round flangeless installs (ordered with a flangeless trim)

CAEM6TSCP Emergency test switch mounting plate. Must be ordered with EM6 frame for remote test switch (see page 3 for details) 347:120V step-down transformer for non-IC (N) frame only (see page 3 for details). Not compatible with emergency options.

### 0-10V electrical tables

Light engine	Input volts	Input current	Drive current	Input power	
C3L05_Z10U/3	120 V	0.06 A	150 mA	7.0 W	
C3L05_Z100/3	277 V	0.02 A	130 IIIA	7.0 W	
C3L07 Z10U/3	120 V	0.08 A	220 mA	9.5 W	
C3L07_2100/3	277 V	0.03 A	220 MA	9.5 W	
02140 74011/2	120 V	0.12 A	220 4	13.6 W	
C3L10_Z10U/3	277 V	0.05 A	330 mA		
00145 74011/0	120 V	0.16 A	450 4	18.6 W	
C3L15_Z10U/3	277 V	0.07 A	450 mA		
00140 74011/0	120 V	0.17 A	500 ··· A	00.434	
C3L18_Z10U/3	277 V	0.07 A	500 mA	20.4 W	
C3L07_Z10US/3	120 V	0.08 A	000 4	0.4111	
C3L07_Z10UR	277 V	0.03 A	220 mA	9.4 W	
C3L10_Z10US/3	120 V	0.12 A	000 4	14 1 14/	
C3L10_Z10UR	277 V	0.05 A	330 mA	14.1 W	

### **ELV** electrical tables

Light engine	Input volts	Input current	Drive current	Input power	
C3L05_E1	120 V	0.05 A	150 mA	5.4 W	
C3L05_E1	277 V	0.02 A	130 IIIA	J.4 W	
C3L07_E1	120 V	0.08 A	220 mA	8.7 W	
C3L07_E1	277 V	0.03 A	220 IIIA	0.7 W	
C3L10_E1	120 V	0.11 A	330 mA	13.2 W	
	277 V	0.05 A	330 IIIA		
C3L15_E1	120 V	0.15 A	450 mA	17.4 W	
C3EI3_EI	277 V	0.06 A	450 IIIA	17.4 VV	
C3L18_E1	120 V	0.17 A	500 mA	19.7 W	
C3LI6_E1	277 V	0.07 A	300 IIIA	19.7 W	
C3_A05_E1S	120 V	0.08 A	220 mA	8.7 W	
C3_A05_E1R	277 V	0.03 A	220 IIIA	0.7 W	
C3_A10_E1R	120 V	0.11 A	330 mA	13.2 W	
C3_A10_E1S	277 V	0.05 A	JOO IIIA	13.2 W	

### Lutron electrical tables

Light engine	Input	Input	Drive current	Input	
engine			Current	power	
C3L05_LU	120 V	0.06 A	150 mA	6.2 W	
C3LU5_LU	277 V	0.02 A	130 IIIA	U.∠ W	
C3L07_LU	120 V	0.08 A	220 mA	8.8 W	
	277 V	0.03 A	220 IIIA		
C3L10_LU	120 V	0.12 A	330 mA	13.0 W	
C3LIO_LO	277 V	0.05 A	330 IIIA	10.0 W	
C3L15 LU	120 V	0.15 A	450 mA	17.7 W	
C3LI5_LU	277 V	0.06 A	450 IIIA	17.7 VV	
C21.10 1.11	120 V	0.17 A	500 mA	19.8 W	
C3L18_LU	277 V	0.07 A	500 IIIA	19.0 W	

### Footnotes for page 1

- 1. Emergency (EM6) frame is compatible with reflector mounted test switch when trim is ordered with IEM6 option code. For remote mounted test switch,
- order EM6 frame and CAEM6TSCP accessory. Not compatible with 347V.

  2. Must order shallow IC frame (S), shallow engine (S) for complete shallow assembly.

  Standard depth and regress (S) trims are compatible with shallow light engines (S).
- 3. The 1500lm (15) and 1800lm (18) options are not available with standard AirSeal IC frame (3RA-).
- 4. Not available with 500lm (05) option.
- Linear driver profile. See page 7 for details.
- Specify only with non-IC (N) frame, not for use with LC or EM6 options. For remodeler installations, order light engine and trim only (no frame needed). Flangeless (F) trims require CA3RFT mud-in accessory for installation.
- Chicago plenum (LC) frame option not available with EM6 options, nor with RA engine dimming option.

### Round downlight

### Frame-in-kits

#### New construction:

Galvanized stamped steel for dry or plaster ceilings. Preinstalled telescoping mounting bars from 13" to 24". For 4' distances, use 1/2" EMT, 1-1/2" x 1/2" U or C channel.

Max ceiling thickness is 1.25" (32mm)

### Patented install mounting frame:

- Pre-installed mounting bars for fast and tool-less installs into T-grid & hat channel ceilings.
- Close-cut aperture design eliminates possibility of gap between ceiling opening and reflector flange.
- Separate wiring compartment for wiring frame to building allows inspection prior to light engine install.
- Simple plug-and-play connection between frame and light engine from below ceiling.

### **Dimming**

All configurations are FCC Class A unless otherwise specified.

- Advance 0-10V 1% (Z10), logarithmic curve is standard, specify D2O for factory-set dim-to-off function, consult factory for linear dimming curve.
- · EldoLED SOLODrive (SOL) 0-10V 0.1%
- · Lutron PEQ0 (L01) Hi-Lume Premier EcoSystem 0.1%
- · Lutron LDE1 (L1) EcoSystem 1%
- Electronic low voltage (E) forward or reverse phase dimming, remodel and AirSeal IC Shallow are FCC Class B
- DALI (D) DT6 DALI 0.1%
- DMX (DMX) Digital multiplexing with RDM 0.1%
- Dim to Warm (D2W) option changes CCT from 3000 - 1800K gradually as it dims, 0-10V (Z10) dimming only

### Dimming options:

- The following are factory-set for the SOL, D, and DMX driver options (ex. DMXLIN):
- SOL/D/DMX: Logarithmic (-) standard
- · SOL/D/DMX: Linear (LIN)
- SOL/DMX: Square (SQR)

### **Optical systems**

MesoOptics PET optical diffusion film: Provides a smooth beam shape and mitigates color over angle with optimized luminaire efficiency. Mitigates LED pixilation for a uniform light emitting surface.

**Quality of light:** 2 SDCM ensures color consistency from fixture to fixture and over the luminaire's long lifetime.

Construction: Precision spun high grade aluminum reflectors with options for anodized or painted finishes. Shallow die cast downlight trims available to aesthetically match adjustable accent in painted finish.

Comfort throughout the space: Deep cones provide a quiet ceiling with true 50° cutoff. Shallow cones have a 70° cutoff where a bit of sparkle is desired.

### **Emergency**

Bodine BSL6 6W battery pack with self-test/diagnostic functionality. Factory or field mounted to frame.

- For trim with integral emergency test switch, order trim with IEM6 option (ex: C3RDLCCIEM6).
- For remote ceiling mounted test switch, order standard trim (ex: C3RDLCC) and CAEM6TSCP mounting plate accessory.
- Refer to Calculite-LyteProfile-EasyLyte Emergency Battery Pack specification sheet for more details.

### Light engine

Quick connect power pack allow for easy installation and replacement from below ceiling with no need for additional wiring. This allows for:

- Frame and ceiling installation to be performed while still finalizing details such as lumen packages, CCT and control type.
- Easy replacement of electronics at end of life with minimal wasted material and labor required.
- · Ease and upgradability of technology.
- $\bullet$  Predicted 70% lumen maintenance to 57,000 hrs.
- Max operating ambient temperature of 30°C.
- 347V light engines are Z10 dimming only and include dedicated 347V driver. For 347V non-Z10 dimming, order T347-75VA field-installed step-down transformer accessory.

### Remodeler Engine (R)

- · No frame is required.
- Remodeler engine is suited for new construction, remodel, and retrofit applications.
- · All wiring is done on the integral j-box to the engine.
- LCEM6 6W battery pack accessory is available for field installation.

### Options and accessories

Field Installed Emergency: Refer to Calculite-LyteProfile-EasyLyte Emergency Battery Pack specification sheet for more details.

CAEM6: Field install EM6 kit with Bodine BSL6 6W battery pack with self-test/self-diagnostic, mounts to new construction frames. Includes remote ceiling plate for test switch. To mount test switch to trim for new construction frame, order trim with IEM6 option code (e.g. C3RDLCCIEM6).

**CAEM6TSCP:** Ceiling cover plate for remote mounted EM6 test switch.  $\frac{1}{2}$ " (25mm) hole,  $4\frac{3}{8}$ " (109mm) x  $2\frac{3}{8}$ " (69mm) rectangular. Includes two mounting screws.

Flangeless mud-in ring: Use CA3RFT for use with flangless plaster installations.

**Lens Film Accessories:** Trim may accept up to one (1) field installed optical films with a total overall thickness up to 0.020" (1.5mm).

T347-75VA Field installable: 347:120V 75VA step-down transformer, attaches to knock out on frame junction box, for use with non-IC (N) frame only. Not for use with emergency options.

SWCS: Interact Ready system bridge accessory, requires IRT9015 IR remote and Interact Pro App for commissioning. Refer to <a href="SWCS spec sheet">SWCS spec sheet</a> for detail.

### Title 24 exceptions

- · BK and CZ finishes
- Must be installed in shallow AirSeal IC Frame
- Must be ELV and 750lm or 1000lm only

### Labels and listings

- · cULus listed for wet locations
- · CEC Title 24 JA8 certified
- CCEA (frames with \*LC suffix)
- Red List Declare label certified, ID SIG-0021 (View full Declare label)

### Warranty



5 year limited warranty Visit Signify.com/warranties for more information on Signify's standard 5-year limited warranty on complete luminaire systems.

### Round downlight

# interact


		N.		
			Gatev	ay Connected
		Standalone	Option 1	Option 2
Dimming, grouping, and zoning		<b>✓</b>	<b>~</b>	<b>~</b>
Bluetooth and ZigBee enabled		<b>✓</b>	<b>✓</b>	<b>✓</b>
Motion sensing and daylight harvesting		<b>✓</b>	<b>✓</b>	<b>✓</b>
Integration with 0-10V and phase dimming fixtures		<b>✓</b>	<b>✓</b>	<b>~</b>
Code compliance		<b>~</b>	<b>~</b>	<b>~</b>
Granular dimming and dwell time		<b>~</b>	<b>✓</b>	<b>~</b>
Correlated color temperature (CCT) tuning by switch	New	<b>~</b>	<b>✓</b>	<b>~</b>
Support for sensor-based Tunable White luminaires	New	<b>~</b>	<b>✓</b>	<b>~</b>
Energy reporting and monitoring			<b>✓</b>	<b>~</b>
Scheduling			<b>✓</b>	<b>~</b>
Demand response			<b>✓</b>	<b>~</b>
BMS integration (BACnet)				<b>~</b>
Floor plan visualization				<b>V</b>
IoT sensors for wellness				<b>~</b>
IoT Apps for productivity				<b>~</b>

### Currently supported maximum system size

To be able to design the lighting system correctly for the customer, it is important to know the prime characteristics of the system, its possibilities and limitations.

System level	
Total number of gateways	Unlimited
Total number of devices	200 per network
Luminaires with integrated sensors	150
Smart TLEDS	150
Zones + groups	64
Total number of ZGP devices (sensors and switches)	50
Sensors	30
Switches	50

Group level						
Recommended number of lights	40 (maximum 150)					
Number of ZGP devices	5					
Number of scenes	16					

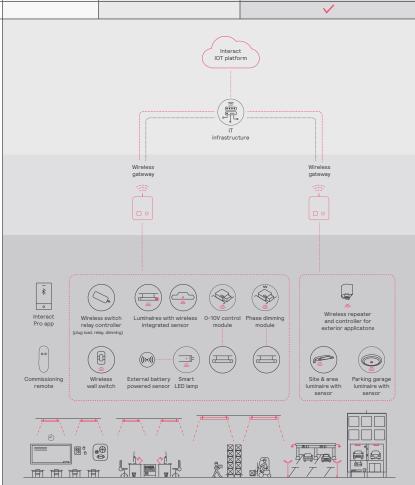

dilato

### Round downlight

### Wireless controls options

### Interact

- SWZCS is a connected sensor with integral occupancy and daylight sensing and supports wireless mesh connectivity.
- The sensor works in the standalone mode (similar to SpaceWise) when configured without a gateway or in a cloud connected mode if a compatible gateway is used.
- Interact includes an App, a portal and a broad portfolio of wireless luminaires, lamps and retrofit kits all working on the same system.
- Startup is implemented via Interact Pro App (Android or iPhone) & BlueTooth connectivity.
   The App provides flexibility to choose between a gateway or non gateway mode for setup.
- Setup with the gateway requires wired internet access to the gateway. It is possible to add a gateway at a later point.
- Prepare project configuration steps remotely and use IRT9015 remote on-site to identify and group devices together.

### Compatible with:

- SWS200 & UID8465 wireless scene switch
- Battery powered IP42 presence sensor OCC sensor IA CM WH 10/1
- Battery powered IP42 presence & daylight sensor OCC-DL sensor IA CM IP42 WH
- LCN3110: battery powered IP65 presence sensor, OCC sensor IA CM IP65W
- LCN3120: battery powered IP65 presence & daylight sensor, OCC-DL sensor IA CM IP65 WH
- For more information on Interact visit: interact-lighting.com/interactproscalablesystem

### Radio only sensor (RA or RADIO)

- Integral RA or RADIO only sensor simply enables wireless mesh connectivity to the luminaire without any occupancy or daylight sensing.
- Ideal for applications where sensing functionality is managed by other Interact devices and the luminaire only needs to have wireless connectivity.
- Interact includes an App, a portal and a broad portfolio of wireless luminaires, lamps and retrofit kits all working on the same system.
- Startup is implemented via Interact Pro App (Android or iPhone) & Bluetooth connectivity.
   The App provides flexibility to choose between a gateway or non-gateway mode for setup.
- Setup with the gateway requires wired internet access to the gateway. It is possible to add a gateway at a later point.
- Prepare project configuration steps remotely, identify and group devices together onsite.
- Compatible with SWS200 and UID8465 wireless scene switch, wireless Occ sensor (OCC SENSOR IA CM IP42 WH 10/1) and wireless Day/Occ sensor (OCC MULTI SENSOR IA CM WH 10/1).
- For more information on Interact visit: interact-lighting.com/interactproscalablesystem

### Sensor bundle (IAOSB or SB)

- A wireless IoT connected lighting solution for large enterprises that span across multiple floors, buildings and require multiple gateways.
- View all your projects under one dashboard and easily compare insights from multiple projects in one view.
- Compatible with SWS200 wireless scene switch, wireless Occ sensor (OCC SENSORIA CM IP42 WH 10/1) and wireless Day/Occ sensor (OCC MULTI SENSOR IA CM WH 10/1) and wireless Occupancy or Daylight & Occupancy sensors available. Use Interact software and insights to increase building efficiency, achieve building wide integration and optimize space through occupancy analytics.
- IAOSB or SB option in addition to occupancy and daylights sensing supports advanced IoT capabilities, such as people estimation analysis, desk level temperature & humidity sensing, noise classification, and BLE beacon.
- Requires compatible Gateway and internet connectivity for commissioning.
- For more information, visit: interact-lighting.com/interactproscalablesystem

### **Emergency Options (ER100)**

- Power Sensing (factory default) –
  Recommended UL924 option requires unswitched
  power sense line, absence of voltage on the
  normal circuit triggers luminaire to 100% output.
- Power Interruption Detection (field option) –
  Detects AC power interruption >30ms triggers
  90 minute emergency mode with luminaire at
  100% output.

### Wired controls options

### Interact (PoE):


- PoE based IoT connected lighting solution for large enterprises that span across multiple floors, buildings and require multiple gateways.
- Use Interact software and insights to increase building efficiency, achieve building wide integration and optimize space through occupancy analytics.
- Test switch and indicator light mounted on side of chassis on one end.
- Supports advanced IoT Apps on Personal Control, Space Management, wayfinding, room/desk reservation and offers open APIs for light control and data exchange.
- Integral sensor option for occupancy sensing (PIR) and/or daylight harvesting available for additional energy savings.
- Optional integral emergency controller and battery pack provides 600lm nominal output.
- PoE lighting controller is accessible from below.
- Emergency battery has a 3 month pre-installed shelf life, and must be stored and installed in environments of 20C to 30C (-4F to 86F) ambient, and 45-85% relative humidity.
- For more information on Interact Office Wired, visit: interact-lighting.com/office or www.usa.lighting.philips.com/systems/systemareas/offices


### Interact supported sensor option codes across Genlyte product lines


	Evokit	Day-Brite	Ledalite	Lightolier
ZigBee + Bluetooth + Sensing	SWZCS	SWZCS	CS	SBA accessory (external)
ZigBee + Bluetooth	RADIO	RADIO	RA	RA
ZigBee + Bluetooth + Sensing + Environmental data	IAOSB	IAOSB	SB	SB
ZigBee + Highbay + Sensing	-	SWZCSH	-	-

### Round downlight


### New construction (N)

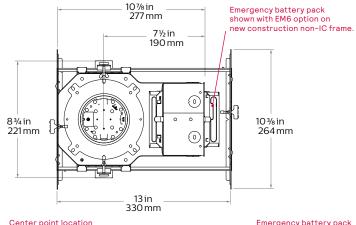

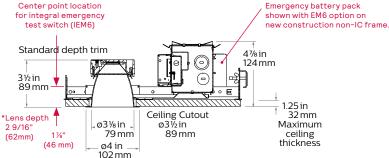


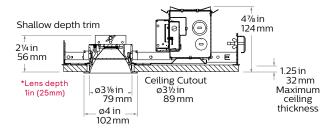



### Remodeler (R)

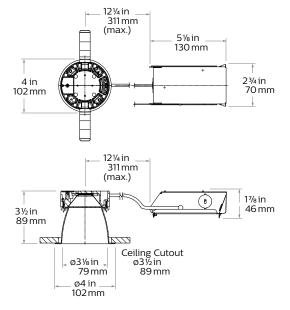

### Standard IC (A) and Chicago plenum (LC)

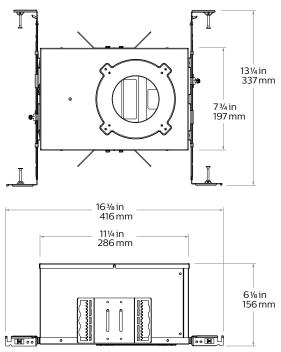


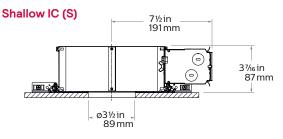

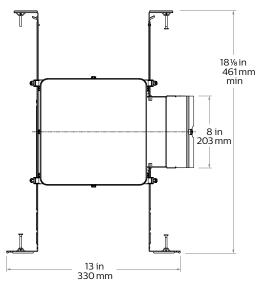


# Round downlight

### Linear driver (RA)

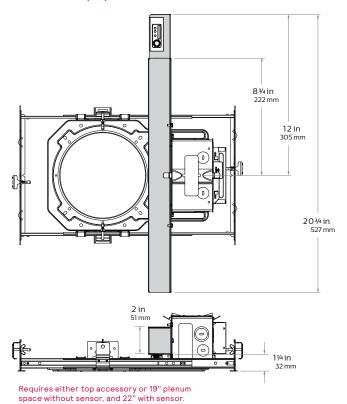

### Flangeless mud-in ring (CA3RFT) accessory



### Round downlight

### Polished Reflectors Shown as round reflectors but represent the finish of Calculite square reflectors.

**Textured Reflectors** Shown as square reflectors but represent the finish of Calculite round reflectors.



Specular clear (CL): Most specular and most efficient finish, delivers maximum photometric performance but can produce a mirror image effect of the interior space.



Champagne bronze (CZ): Semi-specular finish that softens light at the source of the reflector while providing a warmer reflector appearance (slightly warmer).



Comfort clear (CC): Semi-specular finish that softens the light at the source of the reflector and creates a subtle, even luminance from the reflector cone.



White (WH): (matte) Brightest illuminated aperture and provides the smoothest transition to most ceilings when off (white is only available with a white flange).



Comfort clear diffuse (CD): Slightly diffuse clear finish, that eliminates iridescence and reduces the mirror image effect inherent with specular finishes.



**Black (BK):** (anodized) Specular finish that provides the lowest aperture brightness possible and significantly reduces source identification in a ceiling.



Aluminum diffuse (D): Matte painted finish.



Textured white (WT): Matte painted finish.



Bronze (BZ): Matte painted finish.



Textured black (BT): Matte painted finish.

### **Flanges**



White (-): (matte) Provides the smoothest transition to ceilings when off.



**Polished (P):** (matches aperture) Produces a continuous look throughout the reflector (aperture matching).




Flangeless (F): (flush-mount)Creates a flush, virtually seamless transition from aperture to ceiling.



Mud-in ring (FT): Low profile, machined aluminum mud-in ring provides a raised rib to plaster up to and a 3/16" flange thickness. The ring is attached to the ceiling material as opposed to the frame-in kit to avoid conduction of heat and vibration which can cause yellowing or cracking of the plaster.

### Round downlight

### Narrow beam (standard), 1000lm engine, 87.3 lm/W at 14W



Frame: 3RN Engine: C3L10935NZ10U Trim: C3RDLCC

Output lumens: 1222 lms Input watts: 14 W 90 min CCT1: 3500K Spacing Crit.: 0.64

### Zonal summary

Zone	Lumens	%Luminaire
0-30	1074	87.9%
0-40	1152	94.3%
0-60	1220	99.8%
0-90	1222	100.0%

Angle | Mean CP | Lumens

0 5 10	2906 2891 2618	293
15	2078	586
20	1161	
25	495	229
30	171	
35	116	73
40	117	
45	85	66
50	10	١,
55	5	4
60 65	13 2	1
70	1	'
75	Ö	1
80	Ö	'
85	ő	0

### Single unit data

	Initial center beam foot-candles	Beam diameter (ft)*
5'	116	3.2'
6'	81	3.8'
7'	59	4.5'
8'	45	5.1'
9'	36	5.8'

\* Beam diameter is where foot-candles drop to 50% of maximum.

### Multiple unit data - RCR 2

Spacing on center	Initial center beam foot-candles	Watts per sq. ft.
5'	57.2	0.62
6'	37.6	0.41
7'	26.8	0.29
8'	22.4	0.24
9'	17.9	0.19

 $38' \times 38' \times 10'$  Room, Workplane 2.5'above floor, 80/50/20% Reflectances

Report<sup>2</sup>: 1763GFR

#### Adjustment factors


Standard	CCT	Lumens
CL = 105% CC = 100% CD = 80% WH = 80% CZ = 78% BK = 40%	90CRI 4000K = 104% 90CRI 3500K = 100% 90CRI 3000K = 96% 90CRI 2700K = 90%	1800lm = 142% 1500lm = 130% 1000lm = 100% 750lm = 70% 500lm = 50%

### Coefficients of utilization

Ceilir	ng		80	)%		70	)%	50	)%	30	)%	0%
Wall		70	50	30	10	50	10	50	10	50	10	0
RCR		Zon	al cav	ity m	ethod	l - Eff	ectiv	e floo	r refl	ectar	ice = :	20%
0	)	119	119	119	119	119	116	111	111	106	106	100
_ 1		114	112	110	108	110	106	106	103	102	100	95
2		110	106	102	100	104	98	101	96	98	94	91
~~ 3	3	106	100	96	93	99	92	96	91	94	89	87
	ļ	102	95	91	87	94	87	92	86	90	85	83
è 5	,	98	91	86	83	90	82	88	82	87	81	79
Room Cavity Ratio	6	94	87	82	78	86	78	85	78	83	77	76
5 7	7	91	83	78	75	83	75	81	74	80	74	72
운 8	3	88	80	75	72	79	71	78	71	77	71	70
9	)	85	77	72	69	76	69	75	68	75	68	67
10	)	82	74	69	66	73	66	l 73	66	72	66	64

### Medium beam (standard), 1000lm engine, 80.6 lm/W at 14W

#### Candela Curve



Engine: C3L10935MZ10U Trim: C3RDLCC

Output lumens: Input watts: CRI: 14 W 90 min Spacing Crit.: 0.86

### Zonal summary

Zone	Lumens	%Luminair
0-30	836	74.1%
0-40	1039	92.1%
0-60	1126	99.8%
0-90	1128	100.0%

Angle	Mean CP	Lumens
0	1418	
5	1408	143
10	1365	
15	1268	359
20	1075	
25	814	377
30	527	
35	324	203
40	213	
45	104	81
50	16	
55	6	6
60	3	
65	2	2
70	1	
75	0	1
80	0	
85	0	0
90	0	l

### Single unit data

	Initial center beam foot-candles	Beam diameter (ft)*
5'	57	4.3'
6' 7'	39 29	5.2' 6.0'
8'	22	6.9'
9'	18	7.7'

\* Beam diameter is where foot-candles drop to 50% of maximum

### Multiple unit data - RCR 2

Spacing on center	Initial center beam foot-candles	Watts per sq. ft.
5' 6' 7' 8' 9'	51.7 33.9 24.2 20.2 16.1	0.62 0.41 0.29 0.24 0.19

38' x 38' x 10' Room, Workplane 2.5' above floor, 80/50/20% Reflectances

Efficacy: 80.6 lm/w Report<sup>2</sup>: 1758GFR

### Adjustment factors

Standard	ССТ	Lumens			
CL = 105% CC = 100% CD = 80% WH = 80% CZ = 78% BK = 40%	90CRI 4000K = 104% 90CRI 3500K = 100% 90CRI 3000K = 96% 90CRI 2700K = 90%	1800lm = 142% 1500lm = 130% 1000lm = 100% 750lm = 70% 500lm = 50%			

### Coefficients of utilization

Ceiling		80	)%		70	)%	50	)%	30	)%	0%
Wall	70	50	30	10	50	10	50	10	50	10	0
RCR	Zon	al cav	ity m	ethod	l - Eff	ectiv	e floo	r refl	ectar	ice = :	20%
0	119	119	119	119	116	116	111	111	106	106	100
0 1	114	111	109	106	109	105	105	101	101	98	94
Room Cavity Ratio 8 ∠ 9 ⊆ 7 € 6 −	108	103	100	96	102	95	99	93	96	91	88
až 3	103	97	92	88	95	87	93	86	90	85	82
	98	91	85	81	89	81	87	80	85	79	76
<u>2</u> 5 ∫	93	85	79	75	84	75	82	74	81	74	71
ے 6 ا	89	80	74	70	79	70	78	69	76	69	67
5 7	84	75	70	65	75	65	73	65	72	65	63
윤 8	80	71	65	61	71	61	70	61	69	61	59
9	77	67	62	58	67	58	66	57	65	57	56
10	73	64	58	54	63	54	63	54	62	54	53


<sup>1.</sup> Correlated Color Temperature within specs as defined in ANSI\_NEMA\_ANSLG C78.377-2008: Specifications for the Chromaticity of Solid State Lighting Products.

2. Tested using absolute photometry as specified in LM79: IESNA Approved Method for the Electrical and Photometric Measurements of Solid-State Lighting Products.

### Round downlight

### Wide beam (standard), 1000lm engine, 77.1 lm/W at 14W

#### Candela Curve



Frame: 3RN Engine: C3L10935WZ10U Trim: C3RDLCC

Output lumens: 1079 lms Input watts: 14 W CRI: 90 min CCT 1: 3500K Spacing Crit.: 1.02

### Zonal summary

Zone	Lumens	%Luminaire
0-30	807	74.8%
0-40	985	91.3%
0-60	1076	99.7%
0-90	1079	100.0%

Angle	Mean CP	Lumens
0	1073	
5	1080	109
10	1096	
15	1121	318
20	1106	
25	903	418
30	512	
35	260	163
40	196	
45	113	88
50	17	
55	7	6
60	3	
65	2	2
70	1	
75	0	1
80	0	
85	0	0

#### Single unit data

	Initial center beam foot-candles	Beam diameter (ft)*
5'	43	5.1'
6'	30	6.1'
7'	22	7.1'
8'	17	8.2'
9'	13	9.2'

\* Beam diameter is where foot-candles drop to 50% of maximum.

### Multiple unit data - RCR 2

Spacing on center	Initial center beam foot-candles	Watts per sq. ft.
5'	49.3	0.62
6'	32.4	0.41
7'	23.1	0.29
8'	19.3	0.24
9'	15.4	0.19

38' x 38' x 10' Room, Workplane 2.5' above floor, 80/50/20% Reflectances

Report<sup>2</sup>: 1770GFR

#### Adjustment factors

Standard	CCT	Lumens
CL = 105% CC = 100% CD = 80% WH = 80% CZ = 78% BK = 40%	90CRI 4000K = 104% 90CRI 3500K = 100% 90CRI 3000K = 96% 90CRI 2700K = 90%	1800lm = 142% 1500lm = 130% 1000lm = 100% 750lm = 70% 500lm = 50%


#### Coefficients of utilization

	80	)%		70	)%	50	)%	30	)%	0%
70	50	30	10	50	10	50	10	50	10	0
Zon	al cav	ity m	ethod	l – Eff	ectiv	e floo	r refl	ectar	ice = :	20%
119	119	119	119	116	116	111	111	106	106	100
114	111	109	106	109	105	105	101	101	98	94
108	103	100	96	102	95	98	93	95	91	87
103	97	92	87	95	87	92	85	90	84	81
98	91	85	80	89	80	87	79	85	78	76
93	85	79	74	83	74	82	73	81	73	71
89	80	74	69	78	69	77	68	76	68	66
84	75	70	64	74	64	73	64	71	64	62
80	71	65	60	70	60	69	60	68	60	58
77	67	62	56	66	56	65	56	64	56	54
73	64	58	53	62	53	61	53	61	53	51
	Zon 119 114 108 103 98 93 89 84 80 77	70 50  Zonal cav 119 119 114 111 108 103 103 97 98 91 93 85 89 80 84 75 80 71 77 67	Zonal cavity m 119 119 119 114 111 109 108 103 100 103 97 92 98 91 85 93 85 79 89 80 74 84 75 70 80 71 65 77 67 62	70 50 30 10  Zonal cavity method 119 119 119 110 114 111 109 106 103 97 92 87 98 91 85 80 93 85 79 74 89 80 74 69 84 75 70 64 80 71 65 60 77 67 62 56	70 50 30 10 50  Zonal cavity method - Eff 119 119 119 119 110 1109 108 103 100 96 102 103 97 92 87 95 98 91 85 80 89 93 85 79 74 83 89 80 74 69 78 84 75 70 64 74 80 71 65 60 77 67 62 56 66	70 50 30 10 50 10  Zonal cavity method - Effective 119 119 119 116 116 114 111 109 106 109 105 108 103 100 96 102 95 103 97 92 87 95 87 98 91 85 80 89 80 93 85 79 74 83 74 89 80 74 69 78 69 84 75 70 64 74 64 80 71 65 60 70 60 77 67 62 56 66 56	70 50 30 10 50 10 50  Zonal cavity method - Effective floo  119 119 119 119 116 116 111  114 111 109 106 109 105 105  108 103 100 96 102 95 98  103 97 92 87 95 87 92  98 91 85 80 89 80 87  93 85 79 74 83 74 82  89 80 74 69 78 69 77  84 75 70 64 74 64 73  80 71 65 60 70 60 69  77 67 62 56 66 56 65	70 50 30 10 50 10 50 10  Zonal cavity method - Effective floor refl 119 119 119 119 116 116 111 111 114 111 109 106 109 105 105 101 108 103 100 96 102 95 98 93 103 97 92 87 95 87 92 85 98 91 85 80 89 80 87 79 93 85 79 74 83 74 82 73 89 80 74 69 78 69 77 68 84 75 70 64 74 64 73 64 80 71 65 60 70 60 69 60 77 67 62 56 66 56 65 56	70 50 30 10 50 10 50 10 50 50  Zonal cavity method - Effective floor reflectan  119 119 119 119 116 116 111 111 106  114 111 109 106 109 105 105 101 101  108 103 100 96 102 95 98 93 95  103 97 92 87 95 87 92 85 90  98 91 85 80 89 80 87 79 85  93 85 79 74 83 74 82 73 81  89 80 74 69 78 69 77 68 76  84 75 70 64 74 64 73 64 71  80 71 65 60 70 60 69 60 68  77 67 62 56 66 56 65 56 64	70 50 30 10 50 10 50 10 50 10 50 10  Zonal cavity method - Effective floor reflectance =:  119 119 119 119 110 116 116 111 111 106 106 108 103 100 96 102 95 98 93 95 91 103 97 92 87 95 87 92 85 90 84 98 91 85 80 89 80 87 79 85 78 93 85 79 74 83 74 82 73 81 73 89 80 74 69 78 69 77 68 76 68 84 75 70 64 74 64 73 64 71 64 80 71 65 60 70 60 69 60 68 60 77 67 62 56 66 56 65 56 64 56

### Wide beam (shallow), 1000lm engine, 79.0 lm/W at 13.6W

90

### Candela Curve



Frame: 3RN Engine: C3L10935WZ10U Trim: C3RDLDS

Output lumens: 1074 lms Input watts: 13.6 W CRI: 90 min CCT 1: 3500K Spacing Crit.: 1.12

### Zonal summary

Zone	Lumens	%Luminaire
0-30	515	48.0%
0-40	783	72.9%
0-60	1037	96.6%
0-90	1074	100.0%

Angle	Mean CP	Lumens
0	707	
5	701	71
10	686	
15	659	185
20	620	
25	576	263
30	514	
35	433	269
40	337	
45	239	184
50	140	
55	74	67
60	47	
65	26	26
70	12	
75	7	7
80	4	
85	2	1
90	0	l

### Single unit data

	Initial center beam foot-candles	Beam diameter (ft)*
5'	28	5.6'
6'	20	6.7'
7'	14	7.8'
8'	11	9.0'
9'	9	10.1'

\* Beam diameter is where foot-candles drop to 50% of maximum.

### Multiple unit data - RCR 2

•		
Spacing on center	Initial center beam foot-candles	Watts per sq. ft.
5'	47.0	0.60
6'	31.0	0.40
7'	22.0	0.28
8'	18.0	0.24
9'	15.0	0.19

38' x 38' x 10' Room, Workplane 2.5' above floor, 80/50/20% Reflectances

Efficacy: 79.0 lm/w Report<sup>2</sup>: 1810GFR

### Adjustment factors

Shallow	CCT	Lumens
WT = 112% WH = 110% D = 100% BZ = 77% BK = 75% BT = 74%	90CRI 4000K = 104% 90CRI 3500K = 100% 90CRI 3000K = 96% 90CRI 2700K = 90%	1800lm = 142% 1500lm = 130% 1000lm = 100% 750lm = 70% 500lm = 50%

### Coefficients of utilization

Ceiling		80	)%		70	)%	50	)%	30	)%	0%
Wall	70	50	30	10	50	10	50	10	50	10	0
RCR	Zon	al cav	ity m	ethod	l – Eff	ectiv	e floo	r refl	ectar	ice = :	20%
0	119	119	119	119	116	116	111	111	106	106	100
0 1	112	109	106	103	107	102	103	98	99	95	91
Room Cavity Ratio 8 2 9 9 6 7 8 6 7	105	99	94	90	97	89	94	87	91	85	82
≃് 3	98	90	84	79	89	79	86	77	84	76	73
.≙ 4	92	83	76	71	81	70	79	69	77	69	66
<u>2</u> 5	86	76	69	63	75	63	73	63	71	62	60
ပ္ 6	80	70	62	57	69	57	67	57	66	56	54
5 7	75	64	57	52	64	52	62	52	61	51	49
윤 8	71	60	52	48	59	47	58	47	57	47	45
9	67	55	48	44	55	44	54	43	53	43	42
10	63	52	45	40	51	40	50	40	49	40	38

- 1. Correlated Color Temperature within specs as defined in ANSI\_NEMA\_ANSLG C78.377-2008: Specifications for the Chromaticity of Solid State Lighting Products.
- 2. Tested using absolute photometry as specified in LM79: IESNA Approved Method for the Electrical and Photometric Measurements of Solid-State Lighting Products.

