


Ordering 12NC	9290 014 13706
Brand Name	CertaDrive
Description	CertaDrive 8W 300mA 240V
Model Number	C008C030V027FNM1AI
Input Voltage	220 - 240V
Input Frequency	50 Hz
RoHS	Yes
Approbations	IS 15885 (Part 2 / Sec 13)
Status	BIS Certified

Output Power (W)	Output Voltage (V)	Output Current (A)	Efficiency at Max Load	Max Case Temp (°C)	Input Current (Arms)	Max Input Power (W)	Isolation (Input - Output)	THD @ Max Load (%)	Power Factor @Max Load	Surge Protection (KV)	Weight (Kg)	Envir. Protection Rating
8	16 -27	0.300	240V	65	240V	10	Isolated Driver	≤ 55 @Max Load	≥ 0.8	2	0.04	IP 20
			80		0.052							

Wire Diagram

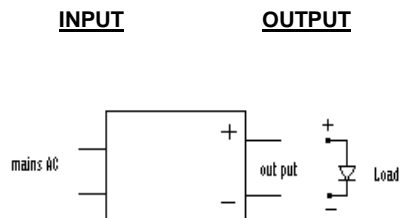


Input Connector

Mains (L-N)	Orange
---------------	--------



Output Connector

LED +ve	Red
LED -ve	Black

Wire to Use





Enclosure

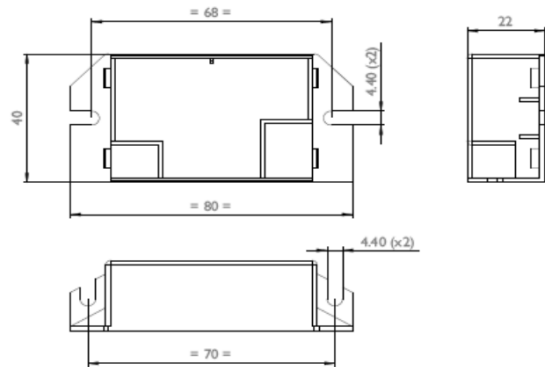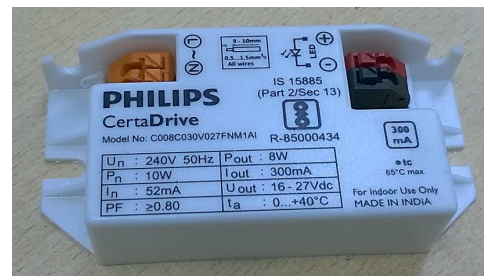


	(mm)
Case Length	80
Case Width	40
Case Height	22
Mounting Length	68
Mounting Length (Side Face)	70


Ordering 12NC	9290 014 13706
Brand Name	CertaDrive
Description	CertaDrive 8W 300mA 240V
Model Number	C008C030V027FNM1AI
Input Voltage	220 - 240V
Input Frequency	50 Hz
RoHS	Yes
Approbations	IS 15885 (Part 2 / Sec 13)
Status	BIS Certified








IS 15885
(Part 2/Sec 13)



PHILIPS
CertaDrive



Model No: C008C030V027FNM1AI R-85000434

U_n : 240V 50Hz	P_{out} : 8W
P_n : 10W	I_{out} : 300mA
I_n : 52mA	U_{out} : 16 - 27Vdc
PF : ≥ 0.80	t_a : 0...+40°C

300 mA

 •tc
65°C max.
For Indoor Use Only
MADE IN INDIA

Product Data	
Full product code	9290 014 13706
Full product name	LED Driver 8W 300mA 240V
Net weight per piece	40 gms
Dimming	None (FIXED)
Ambient Temp. Range	0°C to + 40°C
Line Voltage (AC Nominal)	220 - 240V +/-10%
Line Voltage (AC Performance Range)	170 - 270V
Line Current	0.052A @ 240V
Line Frequency	50 Hz
Envir. Protection Rating	IP 20 (For Indoor use only)
Life at Tc 65 drgree C	30000 hrs (nom.)
Tc - Max.	65°C
Input Over Voltage	Can Survive input Voltage Stress of 320V for 48 hours
	Can Survive input Voltage Stress of 360V for 2 hours
LED Current Tolerance	+/- 10%of Imax
THD Total	$\leq 55\%$ @ Full Load @ 240V Supply
P.F. at Max. Load	≥ 0.8
Isolation (Input - Output)	Isolated
Protection	Short Circuit and Open Circuit Protection for LED + and LED -
Standby Power	$\leq 0.5W$

Ordering 12NC	9290 014 13706
Brand Name	CertaDrive
Description	CertaDrive 8W 300mA 240V
Model Number	C008C030V027FNM1AI
Input Voltage	220 - 240V
Input Frequency	50 Hz
RoHS	Yes
Approbations	IS 15885 (Part 2 / Sec 13)
Status	BIS Certified

Installation & Application Notes :

Section I - Physical Characteristics

- 1.1 LED Driver shall be installed inside an electrical enclosure
- 1.2 Wiring inside electrical enclosure shall comply with 600V/105°C rating or higher

Section II - Performance

- 2.1 LED Driver has a rated lifetime of 30,000 hours @ $T_c \leq 65^\circ\text{C}$
- 2.2 LED Driver tolerates sustained open circuit and short circuit output conditions without damage
- 2.3 LED Driver maximum allowable case temperature is 65°C - see product label for measurement location
- 2.4 LED Driver complies with the requirements of IS 15885 (Part 2 / Sec 13)

ELECTRICAL RATINGS :

Model	Input, 50 Hz		Output (nominal)		
	V	A	V DC	A DC	Watts
CertaDrive 8W 300mA 240V	220 - 240	0.052	16 - 27	0.300	8

TECHNICAL CONSIDERATIONS (NOT FOR FIELD REPRESENTATIVES USE) :

Section III - Conditions of acceptability

When installed in the end-use equipment, the following are among the considerations to be made :

- 3.1 The equipment shall be installed in compliance with the enclosure, mounting, spacing, casualty and segregation requirements of the ultimate application.
- 3.2 The driver is suitable for indoor application only.
- 3.3 When the drivers are installed in the end-use application, the case temperature should not exceed the temperature limits specified in the following table:

Model	Input Voltage, Hz	Max Case @ TC , °C
CertaDrive 8W 300mA 240V	220 - 240 , 50	65