

GreenSpace Accent Elbow

Installation instructions

Instructions de montage

Montageanleitung

Montage instructie

Istruzioni di montaggio

Instrucciones de montaje

Instruções de montagem

Monteringsinstruktioner

Monteringsvejledning

Kokoonpano- ja kiinnitysohjeet

Montaj yönergesi

Odhgjez synarmologhshz




Instrukcja montazu

Szerelési utasítás

Návod k montáži

Инструкция по монтажу

Návod k montáži






220 V
240 V

IP20





GLOW WIRE
650°C



| RS342B LED17S/830 | • | • | • | • | • | • | 0°C | 35°C | 1,25 kg | max 19 W | • | • |
|-------------------|---|---|---|---|---|---|-----|------|---------|----------|---|---|
| RS342B LED17S/840 | • | • | • | • | • | • | 0°C | 35°C | 1,25 kg | max 19 W | • | • |
| RS342B LED27S/830 | • | • | • | • | • | • | 0°C | 35°C | 1,25 kg | max 31 W | • | • |
| RS342B LED27S/840 | • | • | • | • | • | • | 0°C | 35°C | 1,25 kg | max 31 W | • | • |
| RS342B LED35S/830 | • | • | • | • | • | • | 0°C | 35°C | 1,25 kg | max 39 W | • | • |
| RS342B LED35S/840 | • | • | • | • | • | • | 0°C | 35°C | 1,25 kg | max 39 W | • | • |

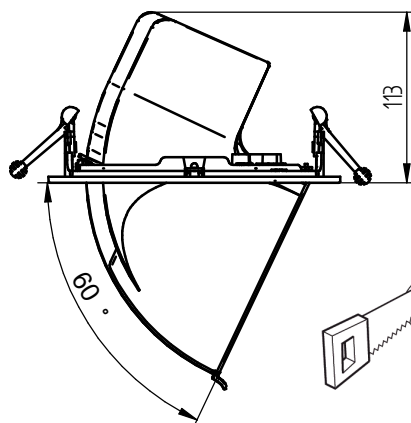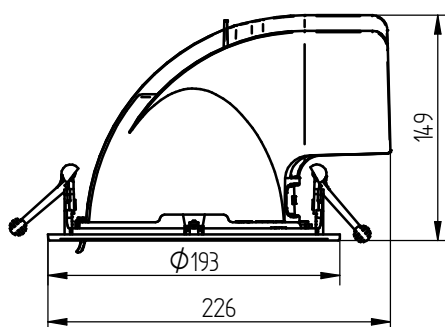

Minimal build-in dimensions

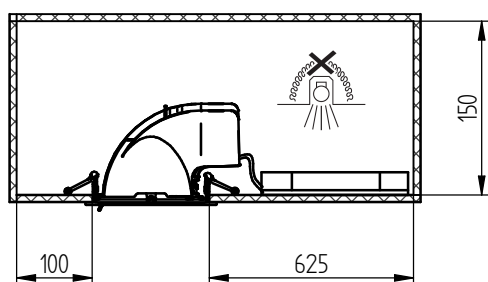

Driver dimensions

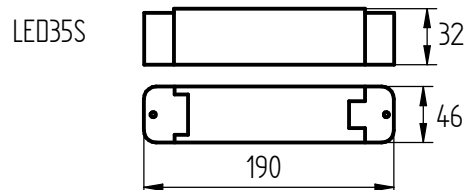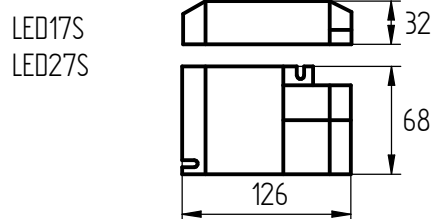

1.

444316004791/C





Version date: 22/10/2014

Data Subject to change without notice


Printed in EU

www.philips.com/lighting

PHILIPS

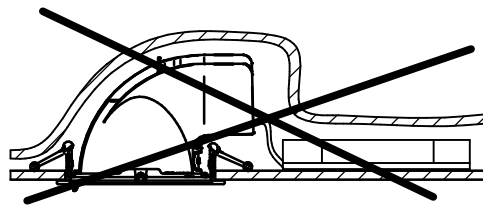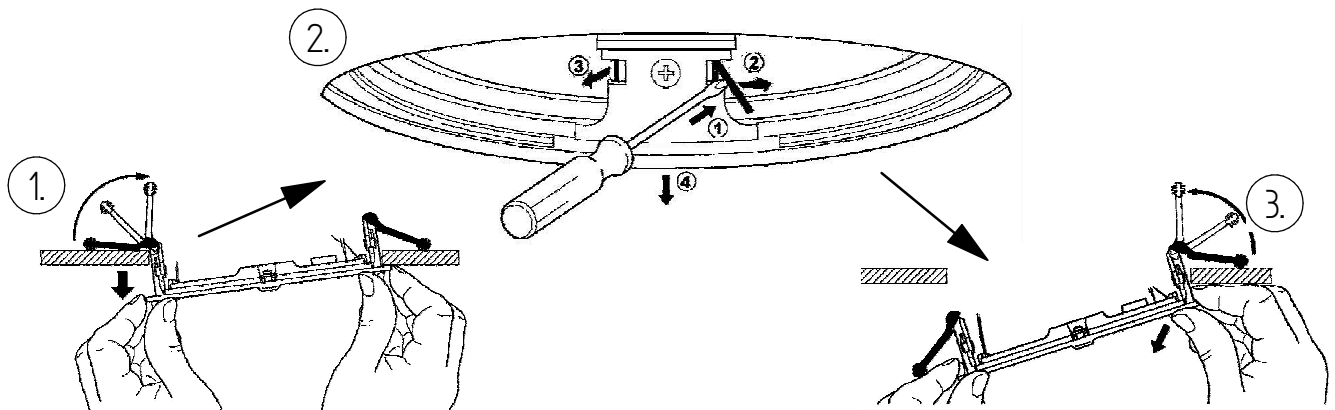
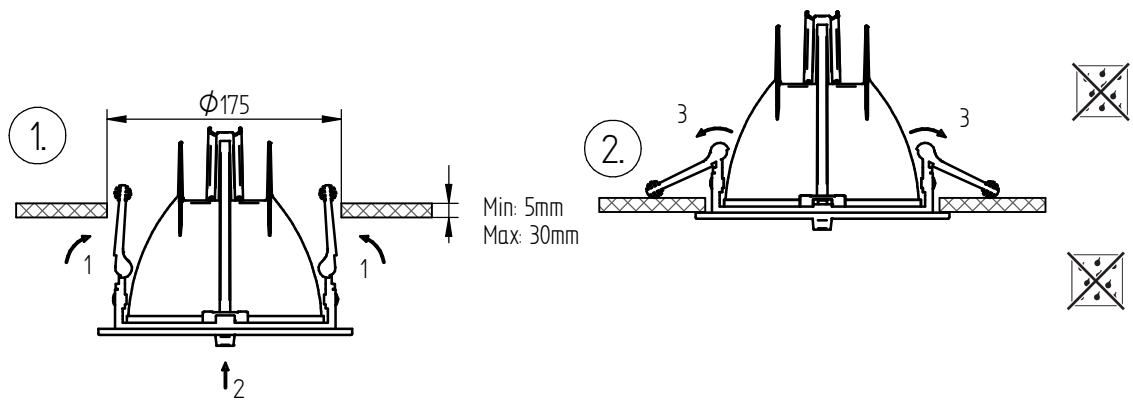


Optical unit changing, and cleaning instructions

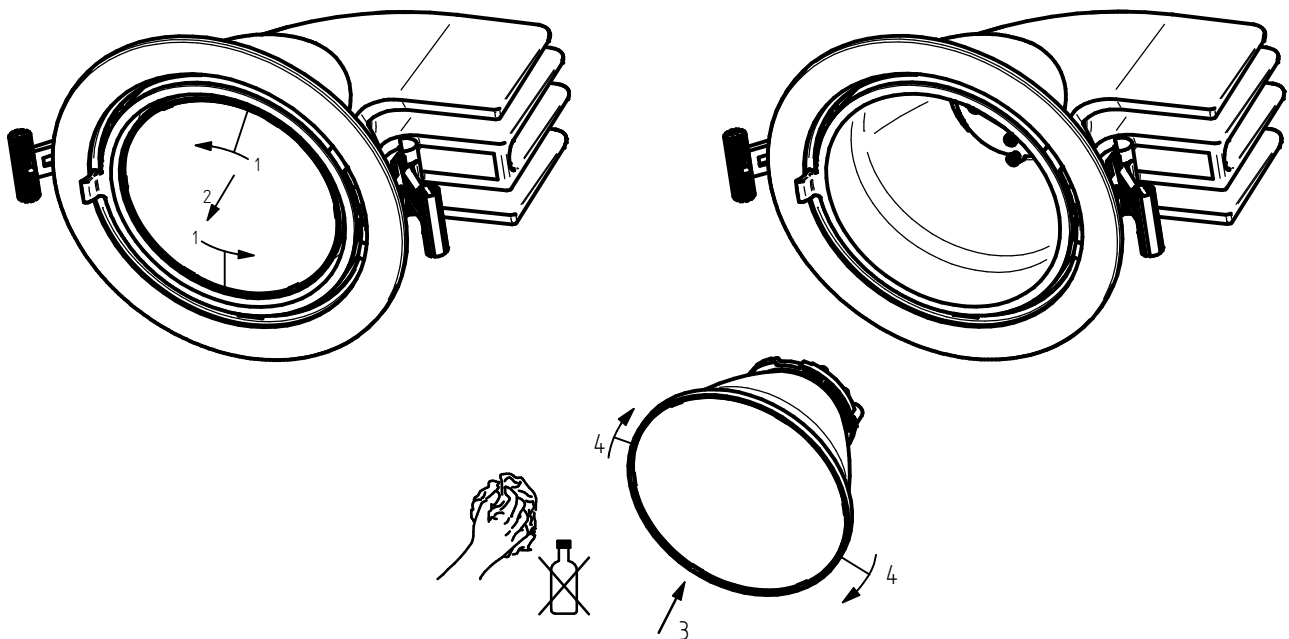


2.

Only with soft cloths!

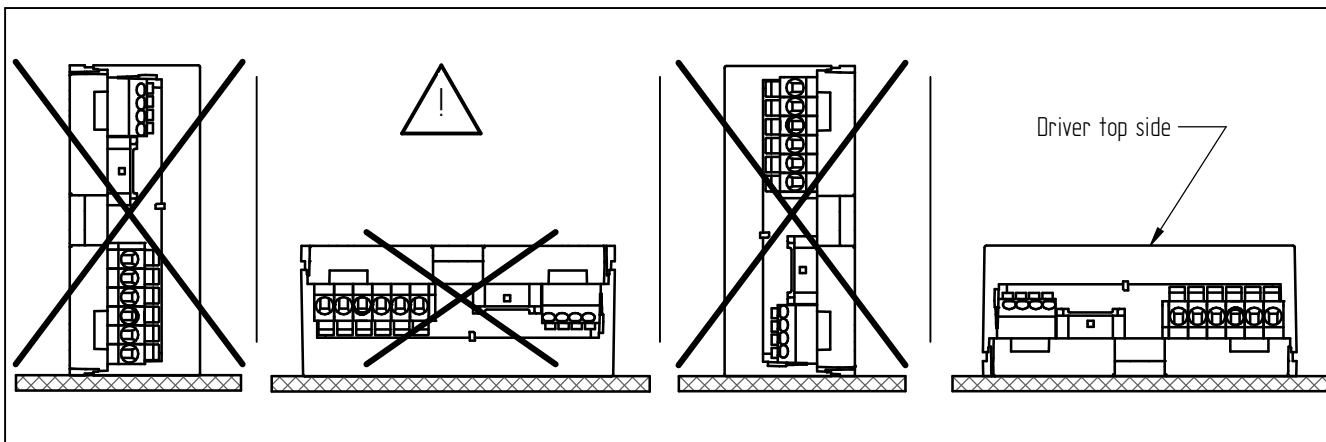

LED driver 36W 0.3-1A 48V I 230V


PSU

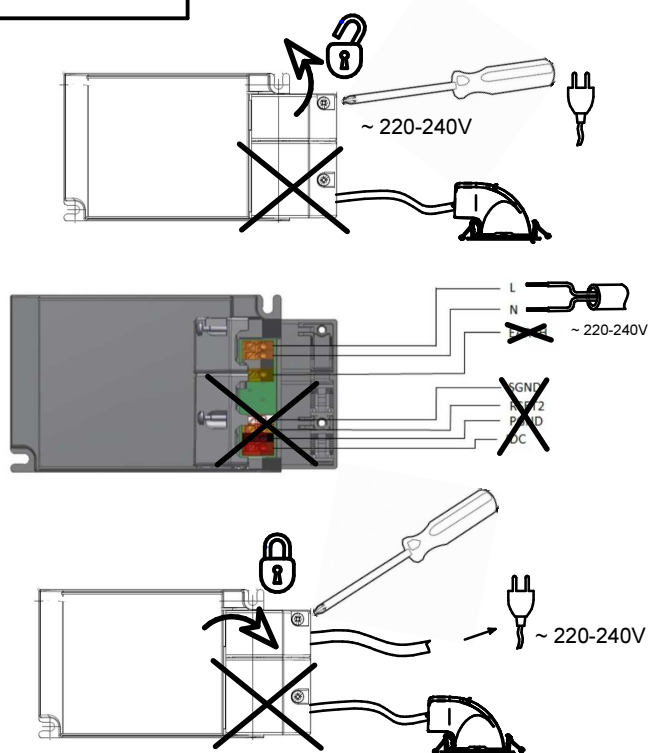

Xitanium 36W LH 0.3-1A 48V I 230V




PSU

~ 220-240V

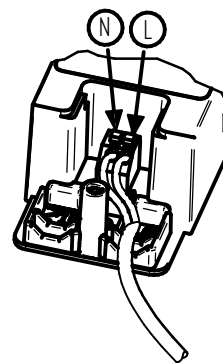

MAIN CABLE

~220-240V

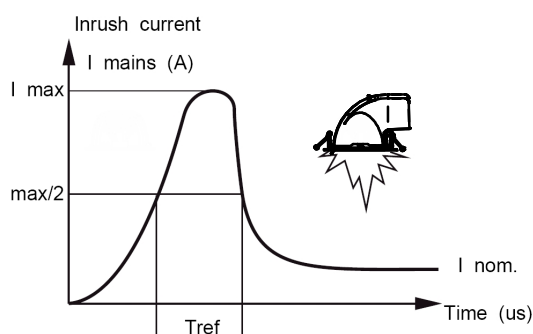

PSU

| LED17S & LED27S | | LED35S | |
|---|---------------------------|--|---------------------------|
| LED driver 36W 0.3-1A 48V I 230V 929000892506 | | Xitanium 36W LH 0.3-1A 48V I 230V 929000838903 | |
| Inom[A] | 0,2 | Inom[A] | 0,19 |
| I _{max} [A] | 6 | I _{max} [A] | 20 |
| Tref[us] | 55 | Tref[us] | 250 |
| MCB | Max products [pcs]* | MCB | Max products [pcs]* |
| B-16A | 39 | B-16A | 32 |

* According to IEC60555 test conditions