


LED Batten/ LED支架灯


BN006C

Mounting instruction/ 安装说明

444170096931



Type Desc 型号描述	Pmax.(W) 灯具功率(W)	Voltage/Frequency 电压/频率	A (mm)	B (mm)	C (mm)	kg	CCT 色温
BN006C LED30 LI200	32	220-240V 50/60Hz	54	36	1187	0.6	3000K/4000K/6500K
BN006C LED15 LI200	17	220-240V 50/60Hz	54	36	1187	0.6	3000K/4000K/6500K
BN006C LED15 L600	17	220-240V 50/60Hz	54	36	667	0.4	3000K/4000K/6500K
BN006C LED8 L600	8.5	220-240V 50/60Hz	54	36	667	0.4	3000K/4000K/6500K

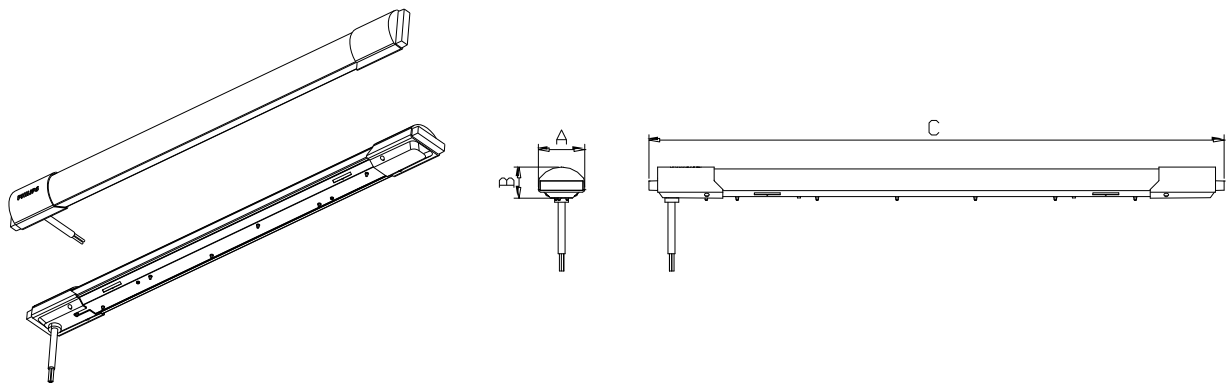


灯具透光罩表面贴有保护膜, 在灯具安装结束后, 请将保护膜撕下。

There are protection film on optical cover surface, please remove it after luminaires installation .


Option 选配件

Standalone ring (Golden or Silver)
标准环(金色或银色)




Mounting
安装

Mark
标记




Connection ring (Golden or Silver)
连接环(金色或银色)



Mounting
安装

Mark
标记



PHILIPS

1 Connect entry cable

连接电源线

Please use IP20 or above terminal box (dimension can't smaller than 10x20x25), it is not provided by Philips.
请使用IP20以上的接线盒（接线端子尺寸不小于10x20x25mm），飞利浦不提供接线盒。

Luminaire cable location/灯具出线位置:

End/端部

Luminaire cable/灯具出线:

60227 IEC53 3x0.75mm²

L: Brown/棕; N: Blue/蓝; G: Yellow+Green/黄绿


2 Mounting

安装

Bracket 安装附件

标配支架

Standard bracket



选配支架

Optional bracket






图 1
Fig.1


Surface Mounting BN006C 吸顶安装



把吸顶支架固定于天花板上，支架安装孔尺寸如图1所示，两支架安装间距参考表1或者安装卡口的三角标记如图2。

Fix mounting brackets onto ceiling, the dimension of bracket hole refer to Fig.1, and the distance between brackets refer to Chart I or the triangle mark of the mounting hole .

Suspension Mounting BN006C 悬吊安装



安装悬吊吊绳（吊绳自备），吊装孔尺寸如图1所示，吊装孔间距参考表1或者安装卡口的三角标记如图2

Install hanging rope (Autogamy hanging rope), suspending hole dimension refer to right Fig1, and distance between suspending hole refer to Chart I or the triangle mark of the mounting hole .

3 The distance of surface or suspension mounting refer to A 吸顶或悬吊安装距离参考A


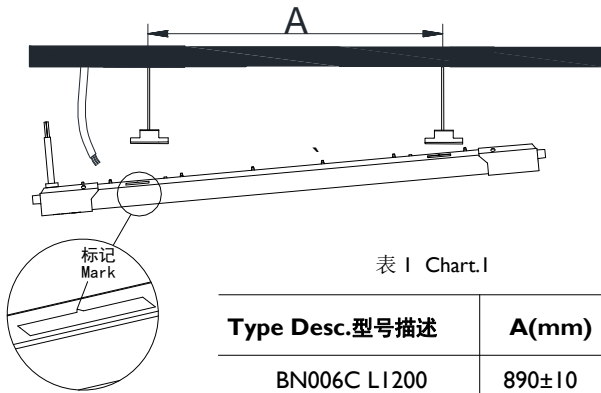


表 1 Chart. I

Type Desc.型号描述	A(mm)
BN006C LI200	890±10
BN006C L600	392±10


图 2
Fig.2

4

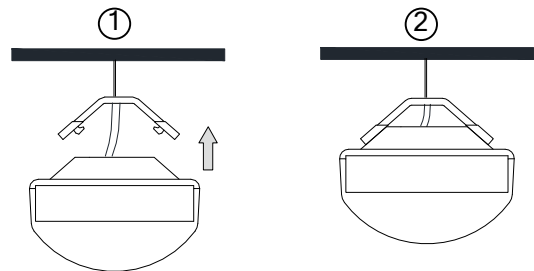


如上图安装步骤所示，将灯具固定于支架上

According to the operation step, fix the luminaire to mounting brackets



禁止手持端盖。
NO HANDLING

- 1、The luminaire shall be installed by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements
灯具应由有资格的电工安装，接线要符合IEE 电气标准或国家标准。
- 2、Do not switch on before complete installation.
接线过程中，切勿通电。
- 3、The luminaire shall ,under no circumstance,be covered with insulation matting or similar material.
灯具不适合被隔热衬垫或类似材料覆盖。
- 4、 The luminaire is suitable for direct mounting on normally flammable material.
灯具适合于直接安装在普通可燃材料表面。
- 5、The cable of the luminaire should use "Z" type connection. The luminaire should be replaced if the wire and lighting source broken.
灯具电源线使用Z型连接，电源线和光源不可更换，损坏需替换整个灯具。