



PHILIPS


TrueLine

RC530B

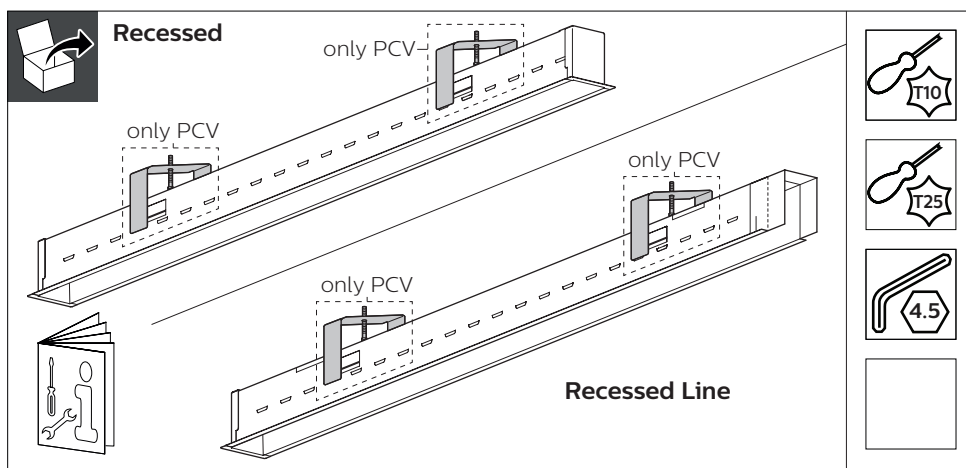


		Sensor/ Blind sensor holder.		VPC	PCV
Recessed (StandAlone)	VPC/PCV	L1130	1130	2.4	2.6
		L1170	1170	2.6	2.8
		L1409	1410	2.9	3.1
		L1449	1450	3.1	3.4
Recessed Line	VPC/PCV	L1130	1127	2.5	2.7
		L1170	1167	2.7	2.9
		L1410	1408	3.0	3.2
		L1450	1448	3.2	3.5

Recessed Dimensions in mm (StandAlone)

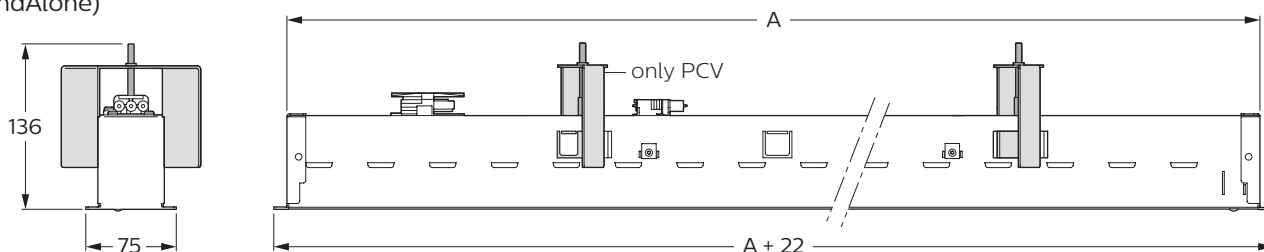


Recessed Line

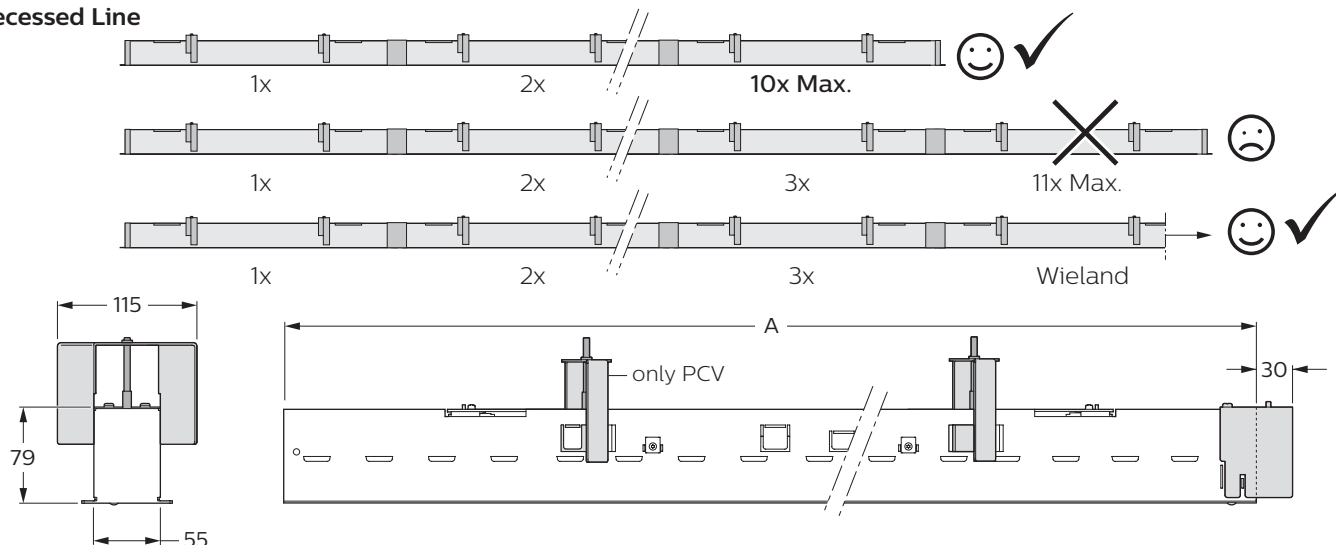

Optional:




RC530Z
EP SET WH







Recessed
(add safety cable if required)







2x

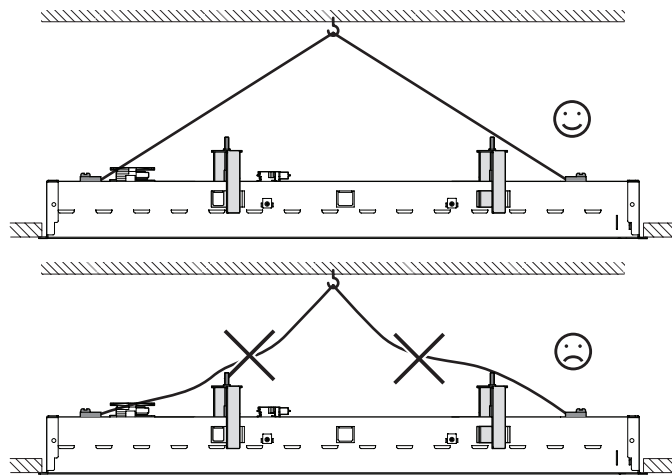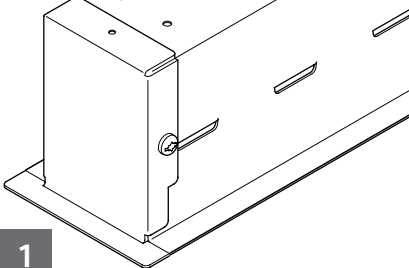


Wiend

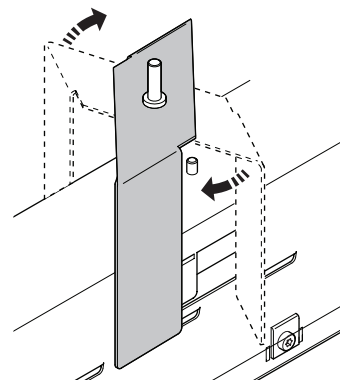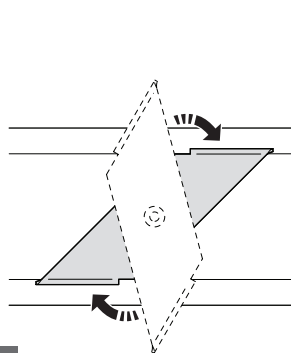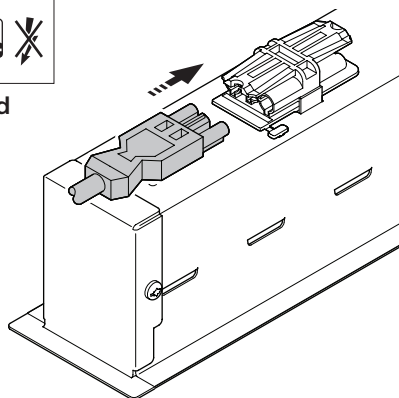


PCV

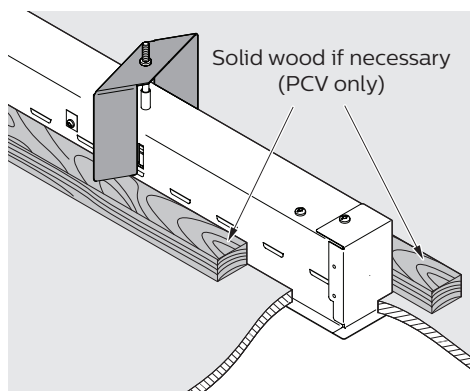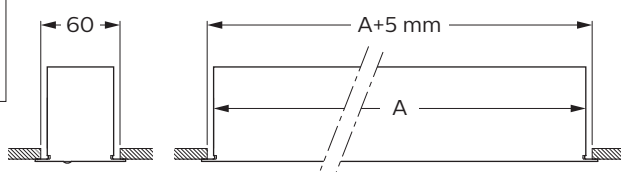

4













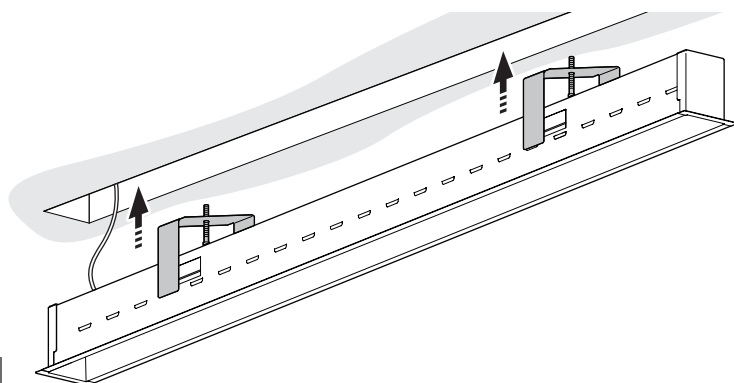


5

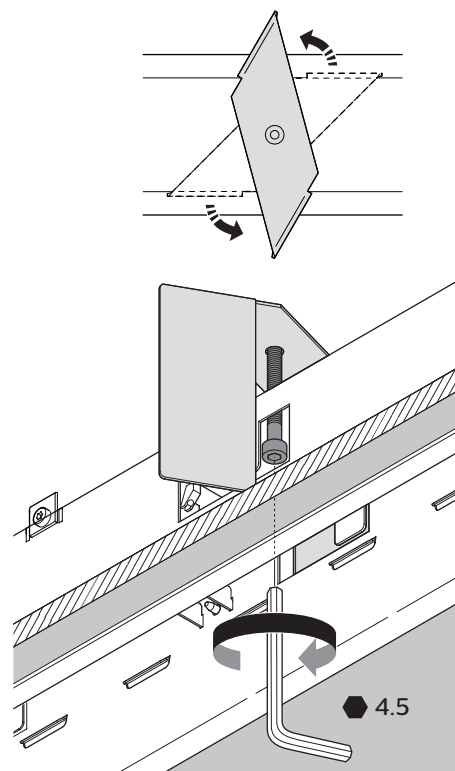



Recessed Line

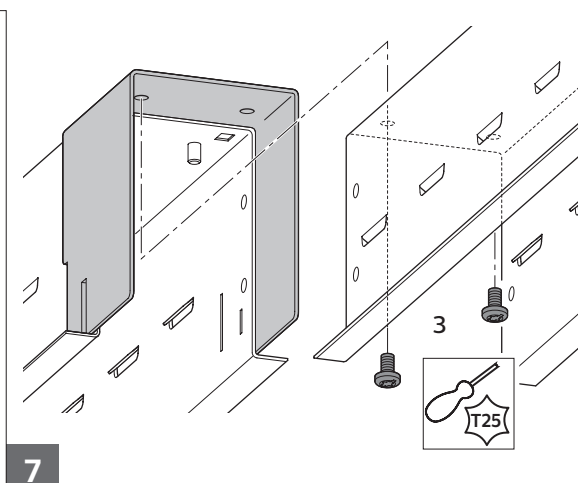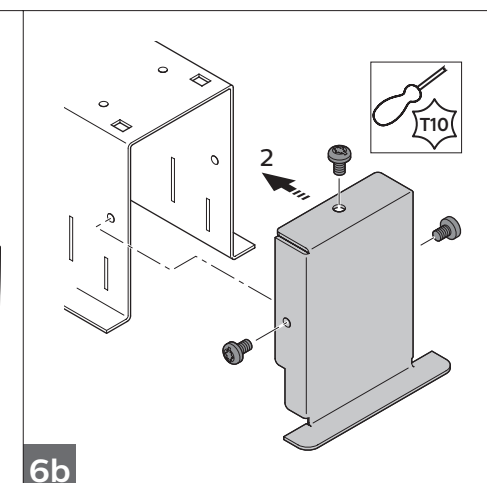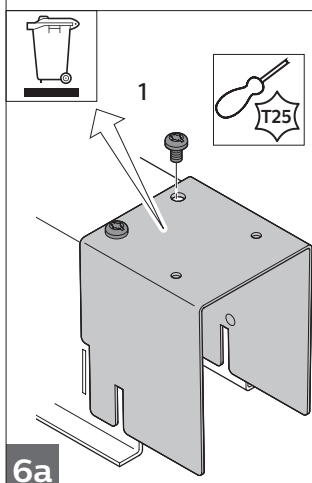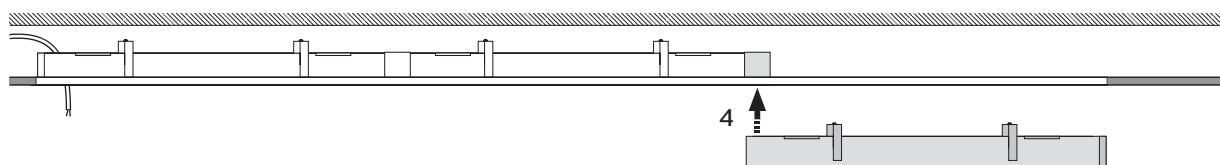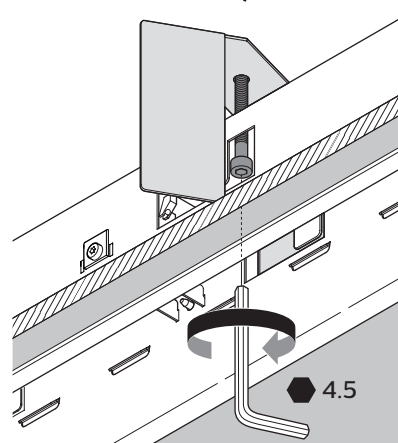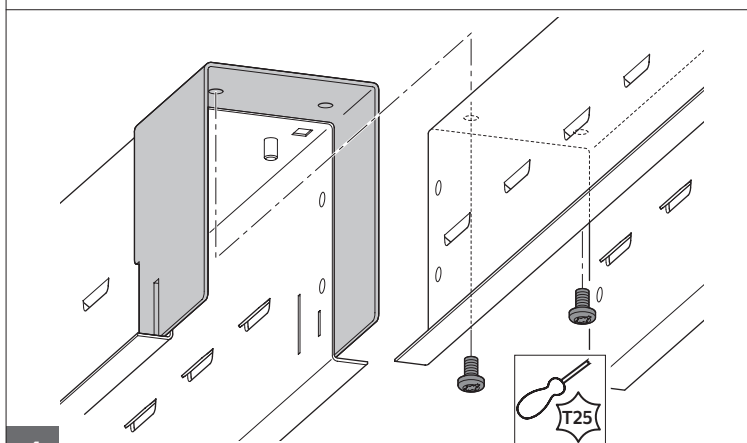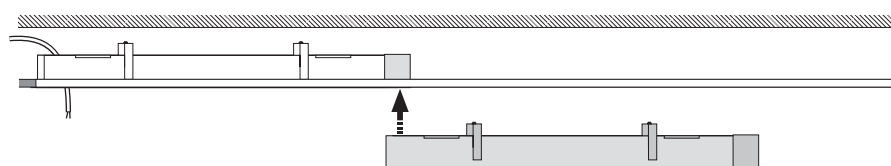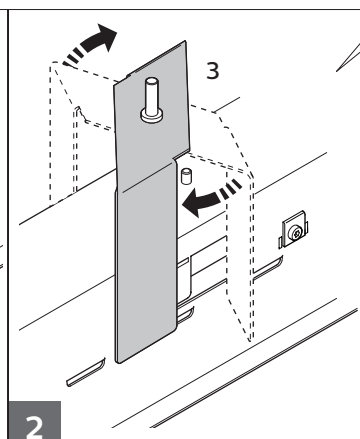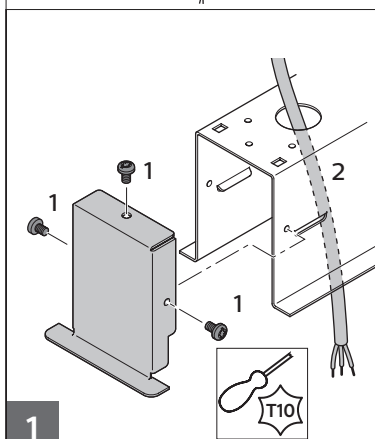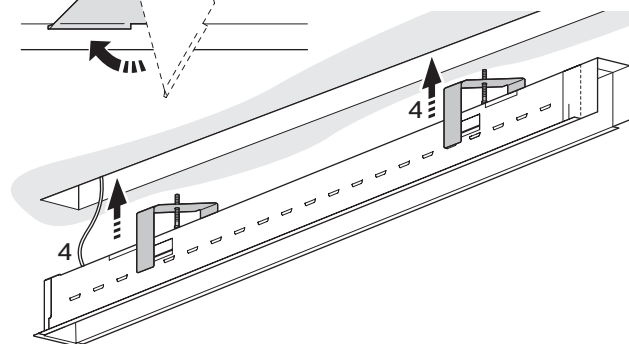

Push-in (PIP) PSD Line

8

DALI 2
 Brown **+ DA / LS**
 Blue **- DA**

DALI 1
 2 Brown **+ DA / LS**
 1 Grey **- DA**
 Yellow-Green
 N Blue **(N)**
 3 Black **(L)**

Push-in (PIP) PSD PI-5

9a

DALI 1
 2 Brown **+ DA / LS**
 1 Grey **- DA**
 Yellow-Green
 N Blue **(N)**
 3 Black **(L)**

PI-7
 DALI 1
 PI-7 + DALI 2

9b

DALI 2
 Brown **+ DA / LS**
 Blue **- DA**

DALI 1
 2 Brown **+ DA / LS**
 1 Grey **- DA**
 Yellow-Green
 N Blue **(N)**
 3 Black **(L)**

10a

10b

10c

Cover remover (ZZS400 OCR)

Replace 10a, b, c

ATTENTION
 OBSERVE PRECAUTIONS
 FOR HANDLING
 ELECTROSTATIC
 SENSITIVE
 DEVICES

Inrush current

I max (A)	19
T ref (μs)	280

Condition:
 Input voltage 220V

MCB	Luminaires Max.
B-10A	15
B-13A	19
B-16A	24
B-20A	30
C-25A	37
C-10A	24
C-13A	32
C-16A	40
C-20A	49
C-25A	62

ACL versions only