
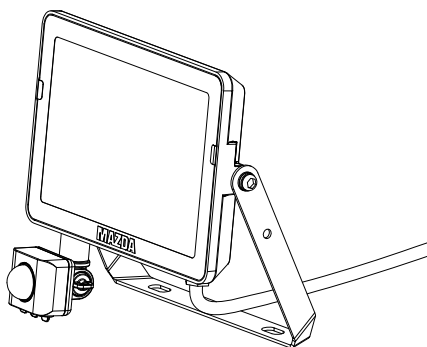


MAZDA Floodlight

BVP008



220V
240V

50Hz
60Hz



IK06

IP65



Max.
50 °C
Min.
-40 °C

Ta
25 °C



Flux (lm)

Power (W)




Beam




MAZDA BVP008 20W 3000K	1800	20
MAZDA BVP008 30W 3000K	2700	30
MAZDA BVP008 50W 3000K	4500	50
MAZDA BVP008 20W 4000K	1900	20
MAZDA BVP008 30W 4000K	2850	30
MAZDA BVP008 50W 4000K	4750	50
MAZDA BVP008 20W 6500K	1900	20
MAZDA BVP008 30W 6500K	2850	30
MAZDA BVP008 50W 6500K	4750	50

100° 120°

0.006	0.38
0.013	0.54
0.018	0.72
0.006	0.38
0.013	0.54
0.018	0.72
0.006	0.38
0.013	0.54
0.018	0.72

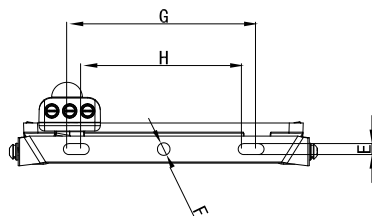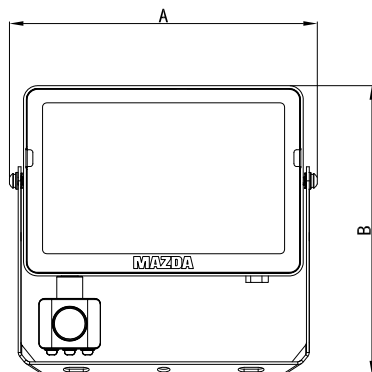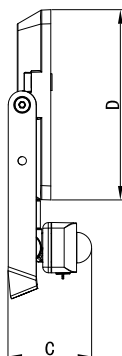


	20W	30W	50W
AA	141	188	220
B	122	154	175
C	28	28	31
D	85	117	136
E	5	6	8.5
F	5.5	6.5	9
G	81	106	135
H	69	94	115



Data subject to change without notice

Install the luminaire according to the national regulations.
3P terminal, the terminal is at least rated voltage

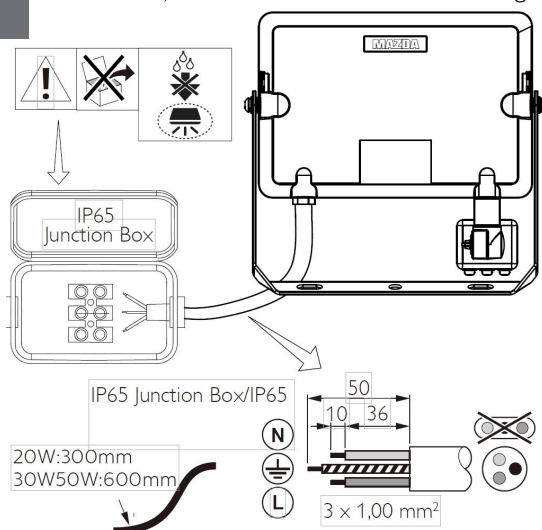


- Always use IP65 or higher IP rated junction box/connector for wiring connection.
- The Luminaire should never be used in submerged wet conditions e.g. under water, soil, snow etc.
- The wiring connection should also never be used in submerged wet conditions e.g. water, soil, snow etc. OR use IP68 junction box.
- The warranty is void, in case any of the instructions / guidelines are not followed as per given mounting instruction.
- This product is not supplied with any junction box / connector.
- For further clarification, please contact the manufacturer.

1a




If the luminaire is higher >3 m, the use of 2nd fixing security system is needed.

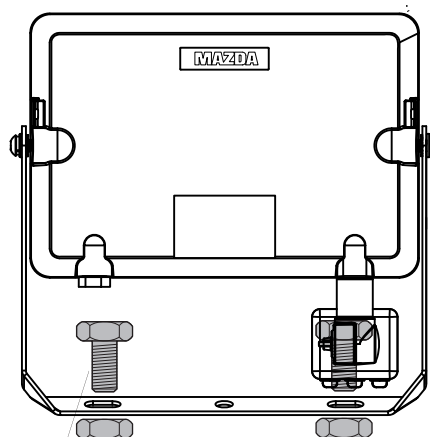


	2.5Nm	2.5Nm	2.5Nm
	7	8	10


1b

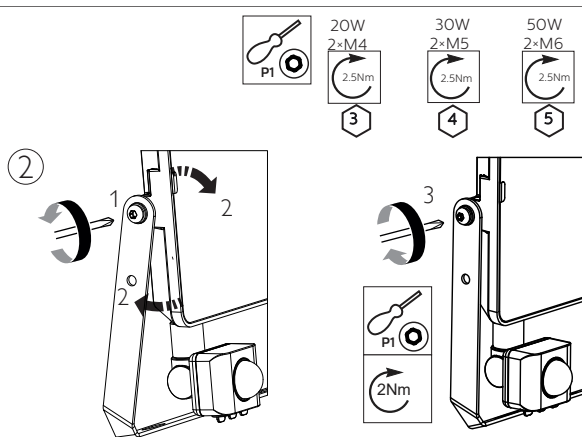


2a

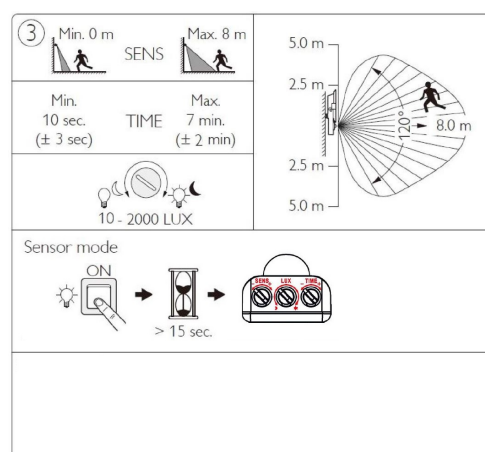

2b

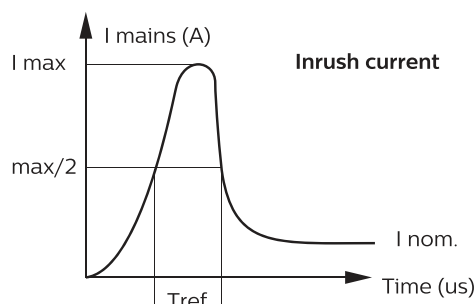

	20W	30W	50W
Electrical characteristics			
I _{max} (A)	0.45	0.78	1.08
T _{ref} (μs)	66	63	58
MCB	Floodlight Max.		
B-10 A	68	45	27
B-16 A	109	73	44
C-10 A	80	53	32
C-16 A	127	85	51

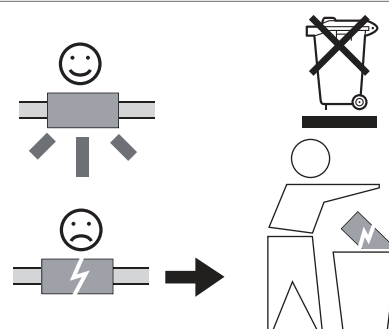

- The luminaire shall be installed or maintained by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements.
- The external flexible cable or cord of this luminaire cannot be replaced; if the cord is damaged, the luminaire shall be destroyed.
- The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced.
- Luminaire must not be used or stored in corrosive environment where hazardous materials such as sulphur, chlorine, phthalates, etc. are present.