
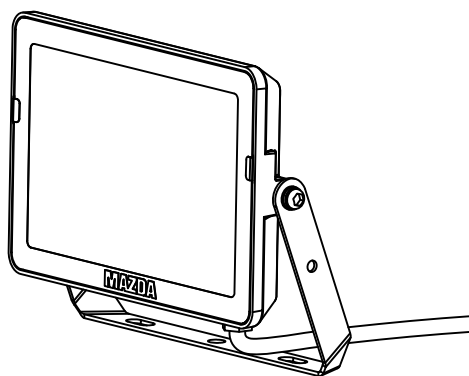


MAZDA Floodlight

BVP008





Flux (lm)

Power (W)


Beam




	Flux (lm)	Power (W)	Beam	m ²	kg
MAZDA BVP008 10W 3000K	900	10		0.003	0.3
MAZDA BVP008 20W 3000K	1800	20		0.006	0.38
MAZDA BVP008 30W 3000K	2700	30		0.013	0.54
MAZDA BVP008 50W 3000K	4500	50		0.018	0.72
MAZDA BVP008 70W 3000K	6300	70		0.032	1
MAZDA BVP008 100W 3000K	9000	100		0.046	1.7
MAZDA BVP008 150W 3000K	13500	150		0.07	2.4
MAZDA BVP008 200W 3000K	18000	200		0.1	3.3
MAZDA BVP008 10W 4000K	950	10		0.003	0.3
MAZDA BVP008 20W 4000K	1900	20		0.006	0.38
MAZDA BVP008 30W 4000K	2850	30		0.013	0.54
MAZDA BVP008 50W 4000K	4750	50		0.018	0.72
MAZDA BVP008 70W 4000K	6650	70		0.032	1
MAZDA BVP008 100W 4000K	9500	100		0.046	1.7
MAZDA BVP008 150W 4000K	14250	150		0.07	2.4
MAZDA BVP008 200W 4000K	19000	200		0.1	3.3
MAZDA BVP008 10W 6500K	950	10		0.003	0.3
MAZDA BVP008 20W 6500K	1900	20		0.006	0.38
MAZDA BVP008 30W 6500K	2850	30		0.013	0.54
MAZDA BVP008 50W 6500K	4750	50		0.018	0.72
MAZDA BVP008 70W 6500K	6650	70		0.032	1
MAZDA BVP008 100W 6500K	9500	100		0.046	1.7
MAZDA BVP008 150W 6500K	14250	150		0.07	2.4
MAZDA BVP008 200W 6500K	19000	200		0.1	3.3

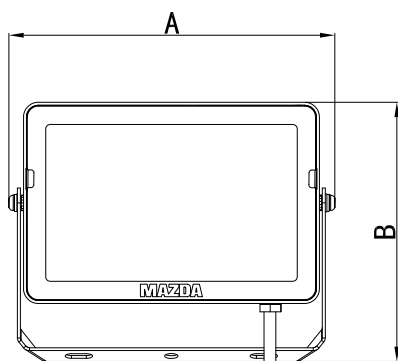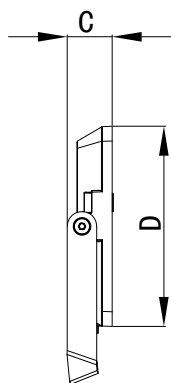

10W20W:300mm
30W50W70W100W150W200W:600mm

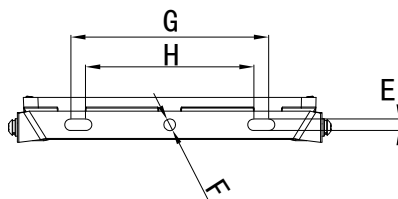


	10W	20W	30W	50W	70W	100W	150W	200W
A	106	141	188	220	272	319	381	455
B	98	122	154	175	211	245	288	331
C	30	28	28	31	31	36	39	58
D	62	85	117	136	172	204	245	285
E	5	5	6	8.5	8.5	8.5	8.5	10.5
F	5.5	5.5	6.5	9	9	9	9	11
G	50	81	106	135	135	170	210	220
H	40	69	94	115	115	150	190	200






Install the luminaire according to the national regulations. 3P terminal, the terminal is at least rated voltage 250V.

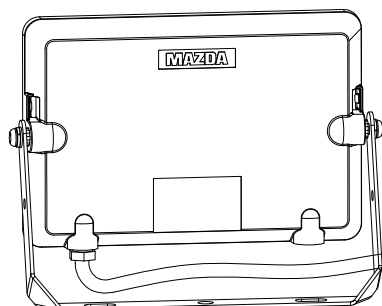

Watertight IP65



H05R -F 3x1.0 mm
60245IEC57




220V
240V

- Always use IP65 or higher IP rated junction box/connector for wiring connection. The Luminaire should never be used in submerged wet conditions e.g. under water, soil, snow etc.
- The wiring connection should also never be used in submerged wet conditions e.g. water, soil, snow etc. OR use IP68 junction box.
- The warranty is void, in case any of the instructions / guidelines are not followed as per given mounting instruction.
- This product is not supplied with any junction box / connector.
- For further clarification, please contact the manufacturer.

1a




If the luminaire is higher >3 m, the use of 2nd fixing security system is needed.

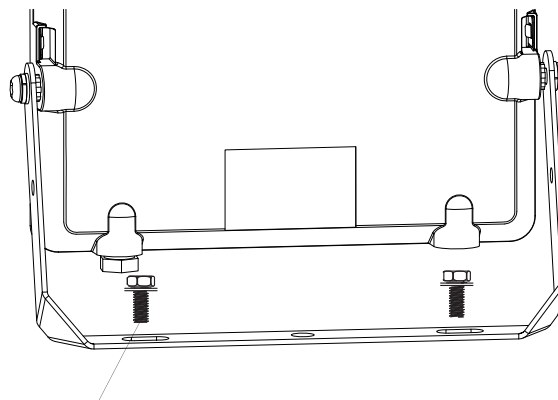


10W/20W	30W	50W/70W	100W/150W	200W
2×M4	2×M5	2×M6	2×M8	2×M10
2.5Nm	2.5Nm	2.5Nm	8Nm	17Nm
7	8	10	14	17


1b

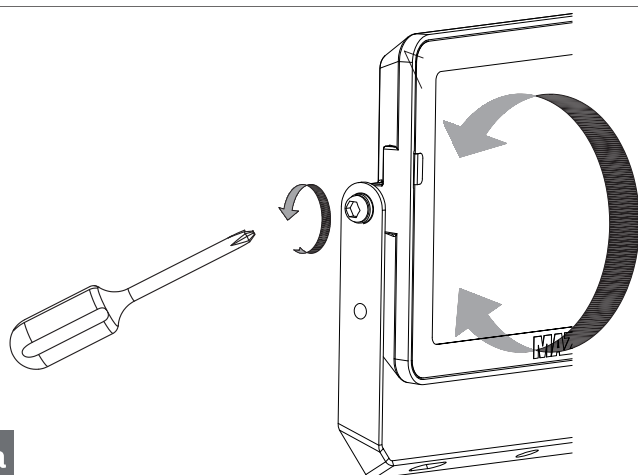


2a

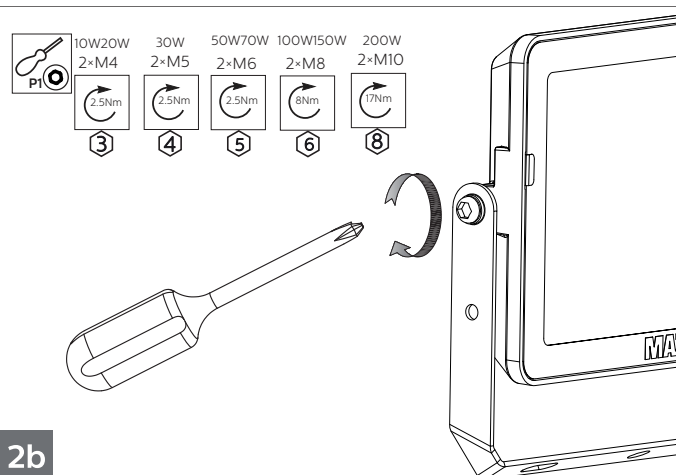

2b

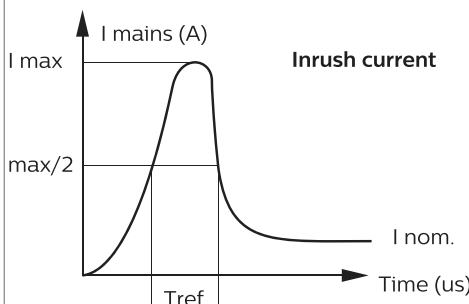

	10W	20W	30W	50W	70W	100W	150W	200W
Electrical characteristics								
I _{max} (A)	0.31	0.45	0.78	1.08	1.35	1.84	2.25	2.73
T _{ref} (μs)	56	66	63	58	78	92	93	95
MCB Floodlight Max.								
B-10 A	136	68	45	27	19	14	9	7
B-16 A	218	109	73	44	31	22	15	11
C-10 A	159	80	53	32	23	16	11	8
C-16 A	255	127	85	51	36	25	17	13

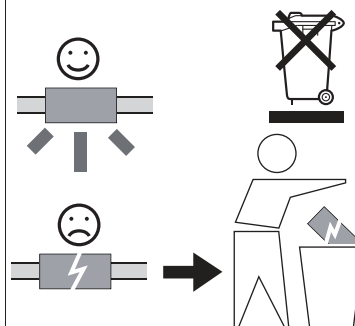

- The luminaire shall be installed or maintained by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements.
- The external flexible cable or cord of this luminaire cannot be replaced; if the cord is damaged, the luminaire shall be destroyed.
- The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced.
- Luminaire must not be used or stored in corrosive environment where hazardous materials such as sulphur, chlorine, phthalates, etc. are present.