


BY200P LED25 NW PSU B-W 1xLED Ra83.8/4246K

1 x 2530 lm




Light output ratio 1.00
Service upward 0.00
Service downward 1.00

CIE flux code 32 72 98 100 100

UGRcen (4Hx8H, 0.25H) 31

Quantity estimation diagram

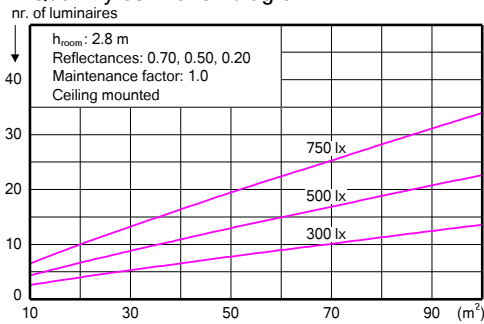


Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.50	0.50	0.50	0.50	0.50	0.30	0.30	0.10	0.30	0.10	0.00	0.00
0.80	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.10	0.10	0.00	0.00
1.00	0.60	0.55	0.58	0.56	0.54	0.46	0.45	0.39	0.44	0.39	0.36	0.36
1.25	0.69	0.64	0.68	0.65	0.62	0.54	0.53	0.48	0.52	0.47	0.45	0.45
1.50	0.77	0.70	0.75	0.72	0.69	0.61	0.60	0.55	0.59	0.54	0.51	0.51
2.00	0.88	0.79	0.86	0.82	0.78	0.71	0.70	0.65	0.69	0.65	0.62	0.62
2.50	0.96	0.85	0.93	0.88	0.84	0.78	0.77	0.73	0.75	0.72	0.69	0.69
3.00	1.02	0.89	0.99	0.93	0.88	0.83	0.81	0.78	0.80	0.77	0.74	0.74
4.00	1.09	0.94	1.05	0.99	0.93	0.89	0.88	0.85	0.86	0.83	0.81	0.81
5.00	1.13	0.97	1.10	1.02	0.96	0.93	0.91	0.89	0.90	0.88	0.85	0.85

Ceiling mounted

UGR diagram

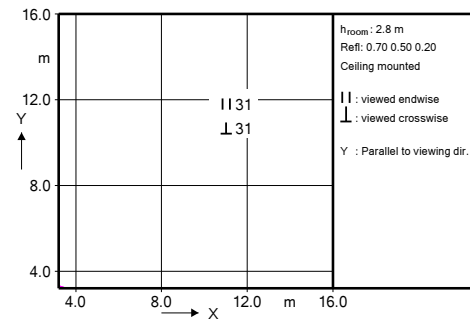

Luminance Table

Plane Cone	0.0	45.0	90.0
45.0	48912	48912	48912
50.0	54891	54891	54891
55.0	60603	60603	60603
60.0	65767	65767	65767
65.0	68610	68610	68610
70.0	55853	55853	55853
75.0	25431	25431	25431
80.0	7643	7643	7643
85.0	6460	6460	6460
90.0	-	-	-

(cd/m²)

LVC1131955

2014-01-06