



# PHILIPS

## Cleanroom CR250B


### Recessed/Surface mounted



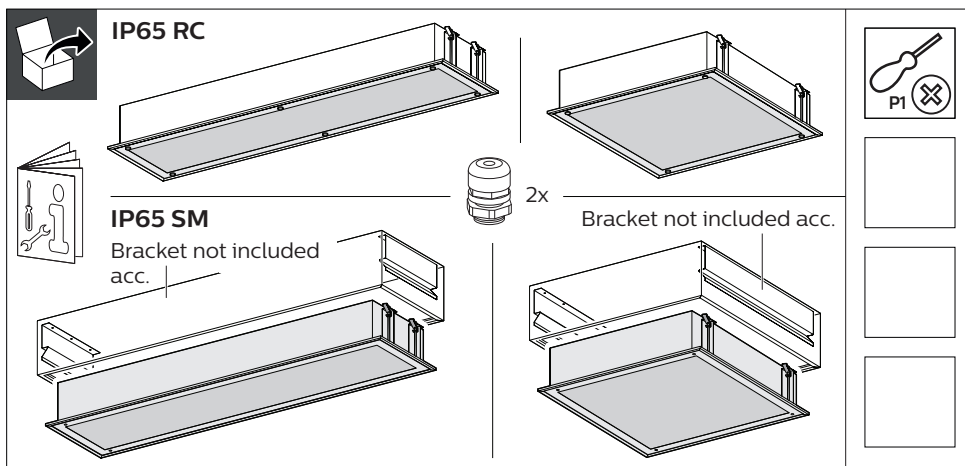


Configuration types		application	Size type	Lumen (lm)	Driver	A	B	kg
CR250B	RC	VPC/CPC/PCV	W60L60	3500/5500	PSU/PSD	595	595	9.0
	(Luminaire only)		W30L120			1195	295	10.0
	SM	Ceiling only	W60L60			630	630	13.5
	(Luminaire+bracket)		W30L120			1230	330	15.0

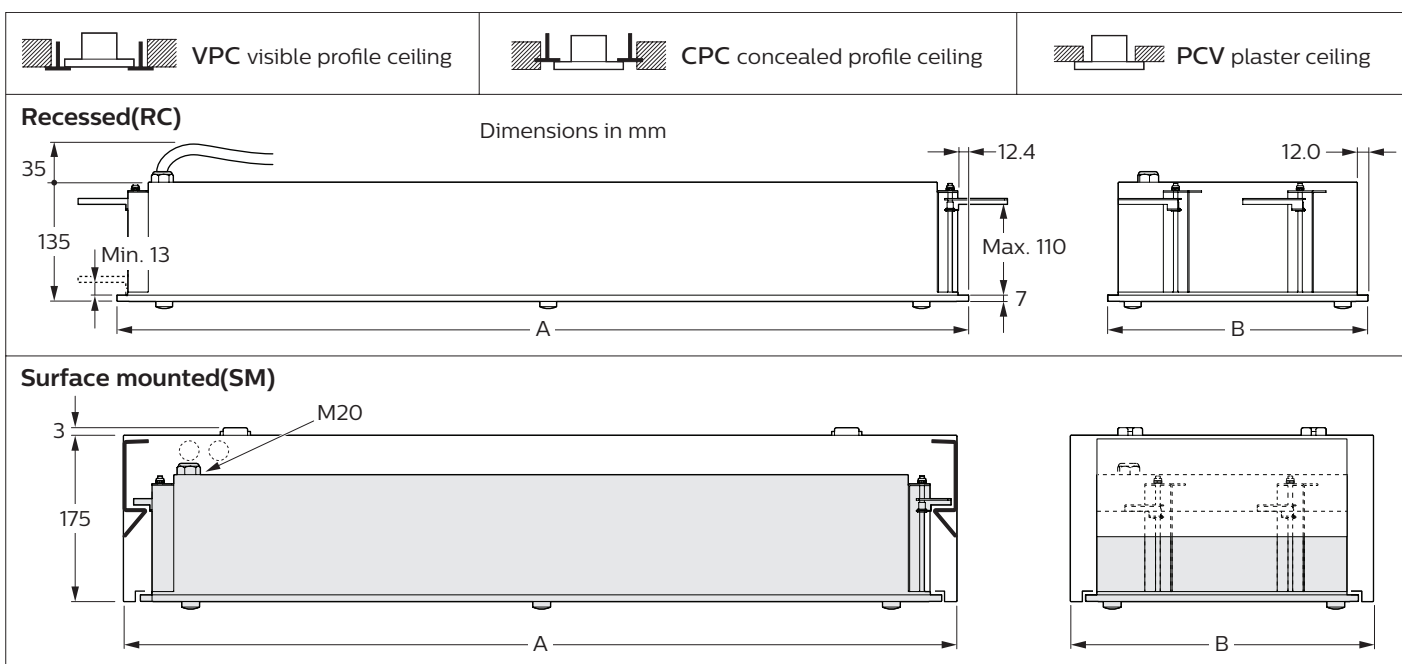



Inrush current		PSU		PSD	
		36W	75W	36W	75W
I max		13	21	4.8	4.6
Tref (μs)		270	220	750	900
MCB		Luminaire Max.			
B-10 A		15	15	15	15
B-16 A		24	24	24	24
B-24 A		37	37	37	37
C-10 A		25	25	25	25
C-16 A		40	40	40	40
C-24 A		62	62	62	62

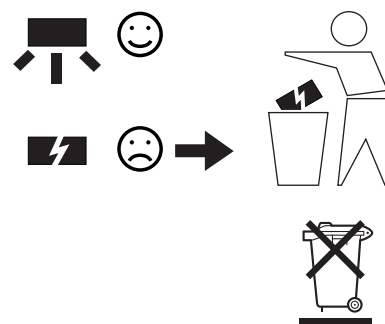

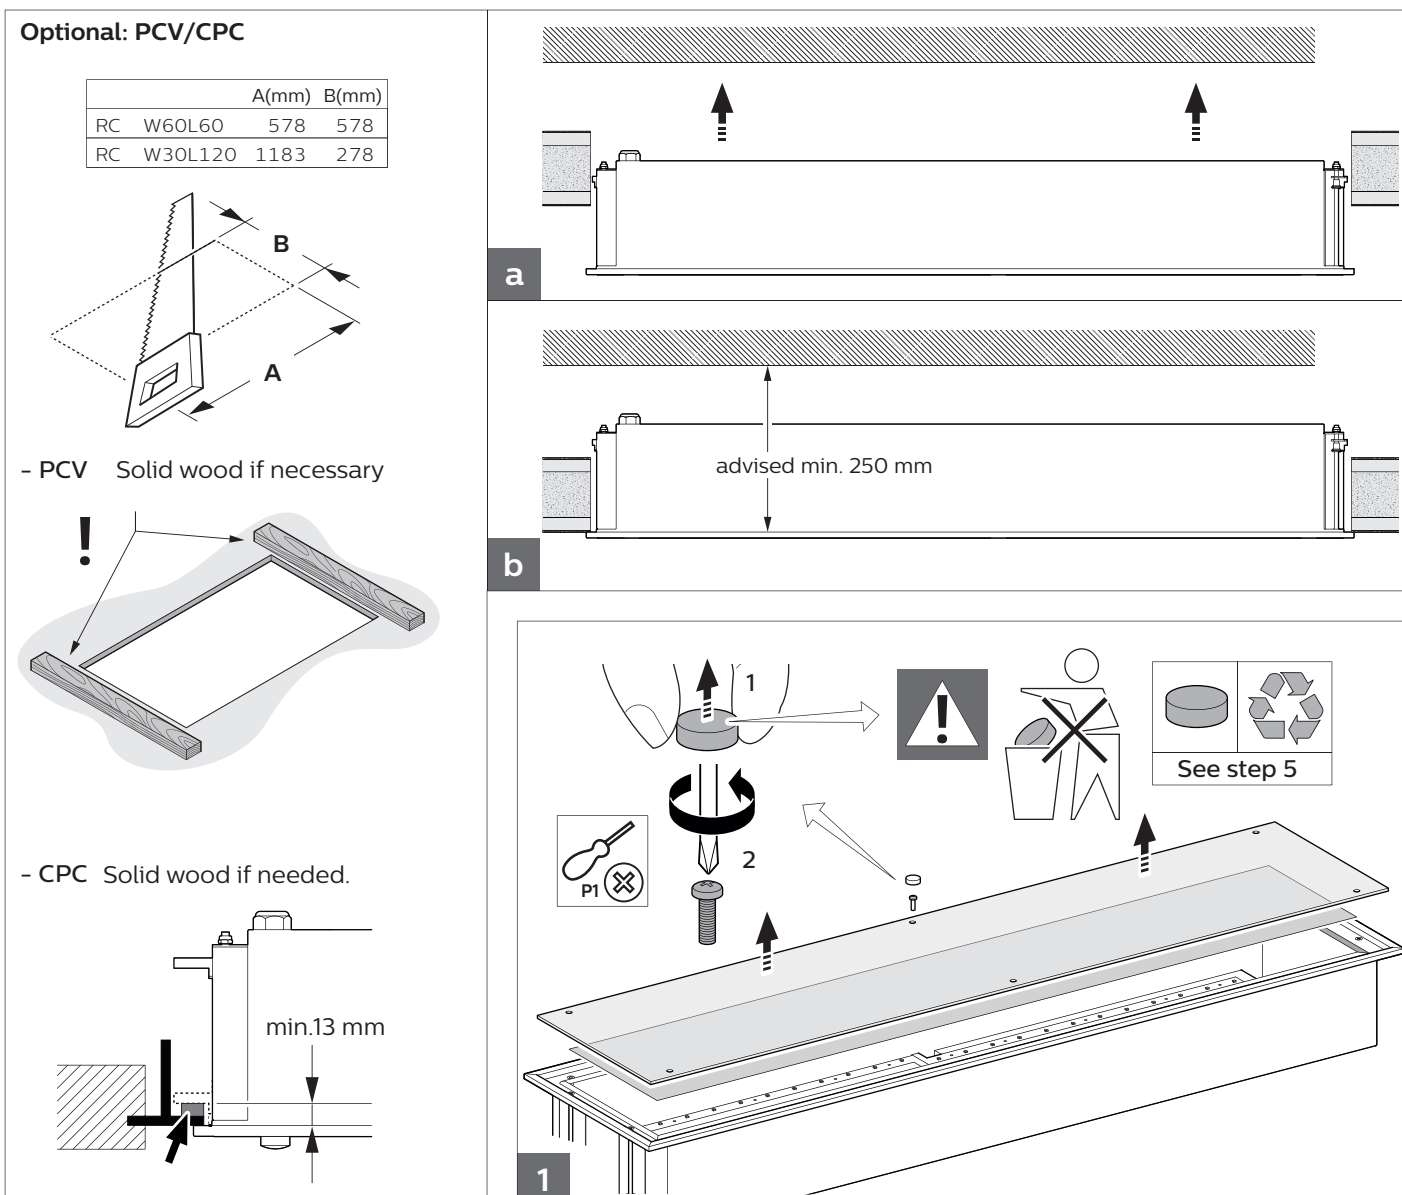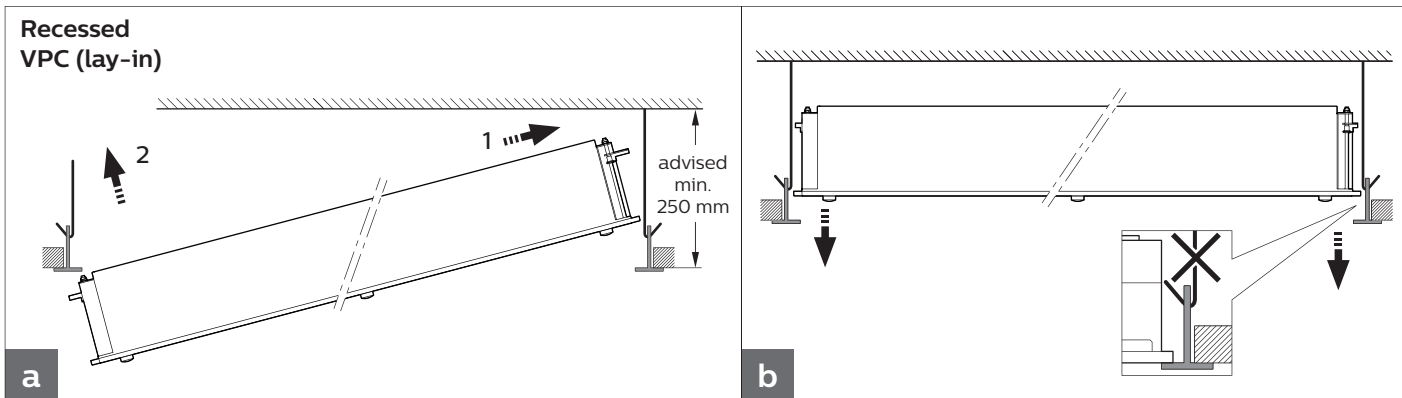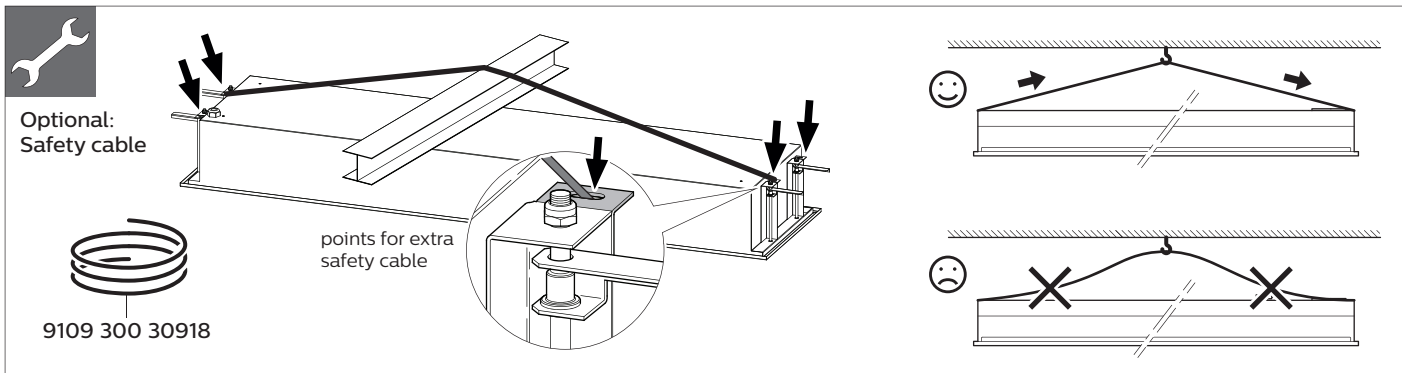



Optional: Surface mounted(S.M.)

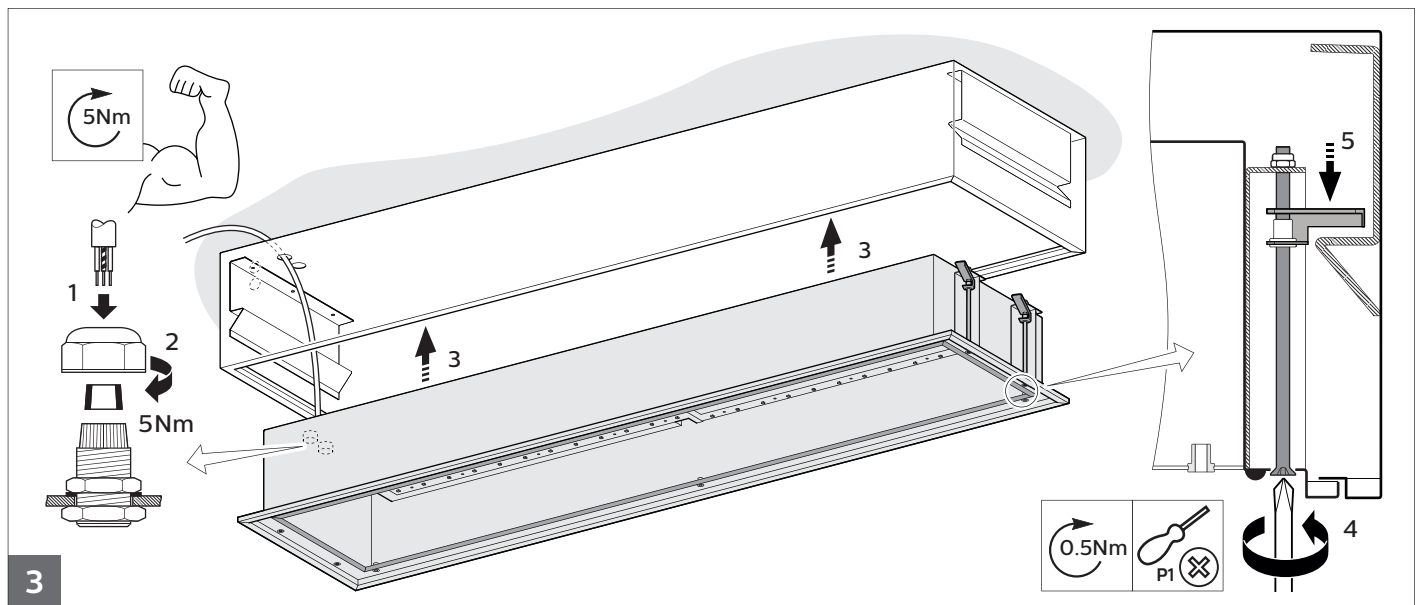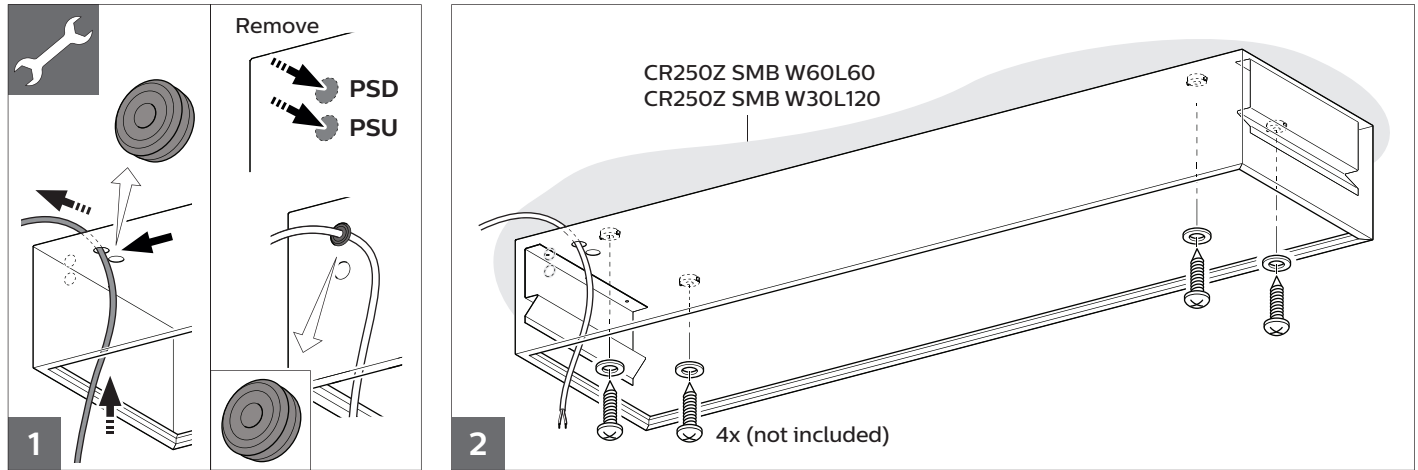

**4** See PCV/CPC: step 4  Push-in

