



LEDALITE

Architectural Mounting

D2 Cable Mount

IS-D2 Fixed Position Grid Mount

IMPORTANT: Read **ALL** installation instructions including fixture/sensor wiring, mechanical details and warnings **before** beginning installation. Sensor wiring is found in the [LEDALITE CONTROLS DESIGN GUIDE: SENSOR INSTALLATION AND SET-UP](#)



D2 Fixed Position Grid Mount

What is Included in this package:


D2-P0 - D2 Fixed Position Grid Mount Installation without Power

D2-P1 - D2 Fixed Position Grid Mount Installation with Power

IMPORTANT: Read all instructions **before** beginning installation.


D2 – P0

1. Seismic tie-off plate (x1)
2. 1/4"-20 machine nut (x3)
3. 1/4"-20 dimple lock nut (x1)
4. 1/2" star washer (X1)
5. 3" canopy non power (x1)
6. Cable gripper (1x)

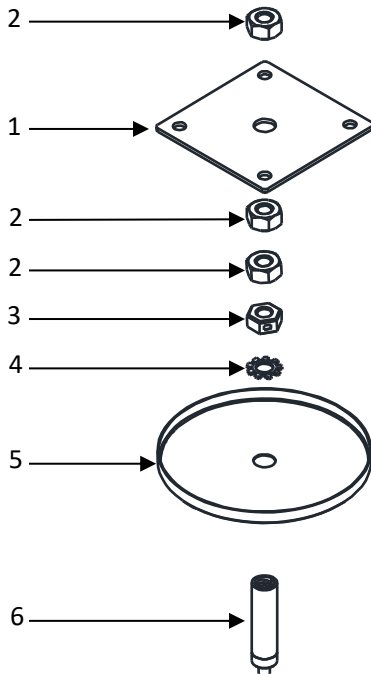

D2 – P1

1. Seismic tie-off plate (x1)
2. 1/4"-20 machine nut (x3)
3. 1/4"-20 dimple lock nut (x1)
4. 1/2" star washer (x1)
5. 3" canopy 1 power (x1)
6. 3/8" plastic bushing white (1x)
7. 3/8" plastic bushing black (1x)
8. Cable gripper (1x)

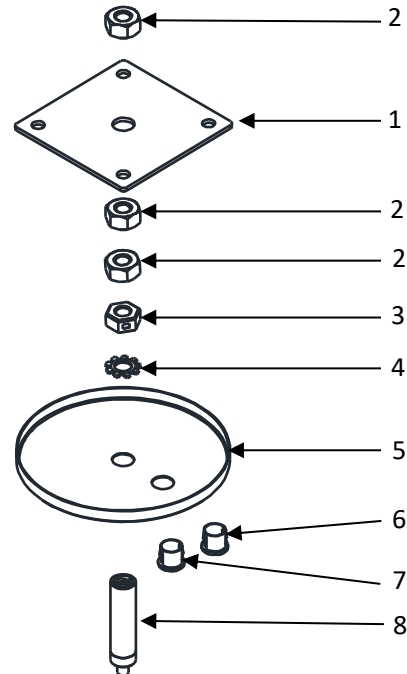

PLEASE RETAIN PACKAGE FOR FUTURE REFERENCE

TOOLS REQUIRED: Hole saw, cable cutters, pliers, 7/16" wrenches, blue Loctite, super glue

! ATTENTION: Install in accordance with local and national building and electrical codes.


01 Ceiling Mount (Non-Power Location)

ATTENTION:
Refer to associated
installation instruction to
complete installation
(e.g, leveling, joining, powered
and non powered mounts.)

ATTENTION: The ¼"-20 ready rod which is
attached to the substructure must safely
support an axial load of 1500lbs.

Optional: Seismic tie off plate provided in
this kit can be used and installed as
required by local building codes.


02 Install ¼"-20 threaded rod

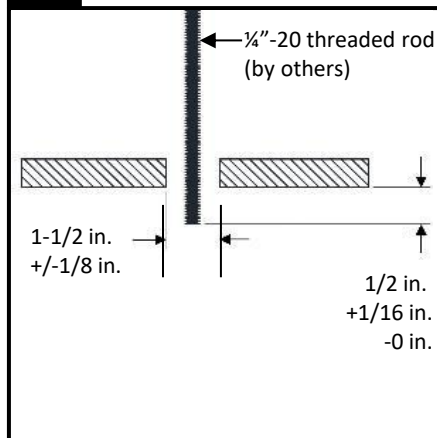

Secure ¼"-20 threaded rod (supplied by others) to the substructure, directly above specified mount location. (see layout drawings) Note: Recommend using a minimum A36 steel ¼"-20 threaded rod.

IMPORTANT: The free end of the threaded rod must be located at approximately 9/16" below ceiling level. Drill a 1-1/2" diameter hole in ceiling tile at each required mount location.

03 Install Locknut

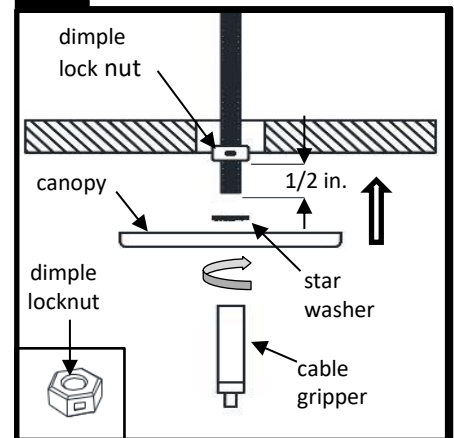


IMPORTANT:

Thread dimple locknut onto threaded rod until bottom of nut is 1/2" above free end of threaded rod.

IMPORTANT: Apply of small amount of blue Loctite to end of ¼"-20 threaded rod.


04 Install canopy and gripper

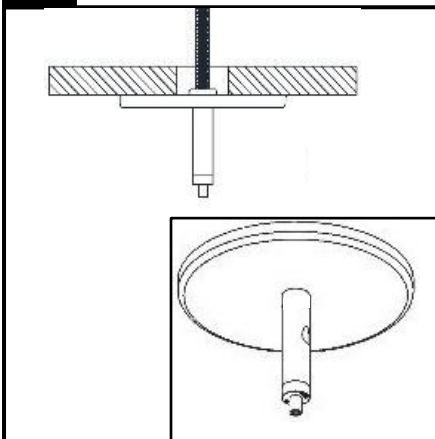

IMPORTANT:


Use rubber lined pliers to fully tighten cable gripper against canopy and dimple lock nut.

05 Install suspension cable

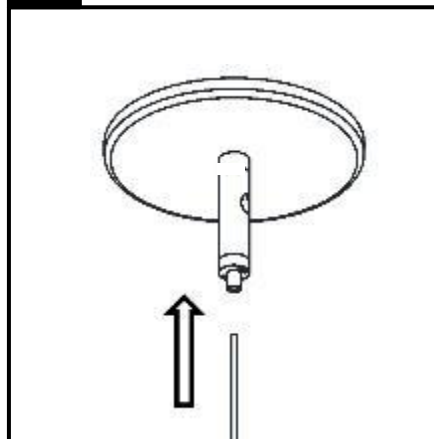

Insert suspension cable in cable gripper. Refer to luminaire installation instructions for leveling and finishing steps.

06 Install suspension cable

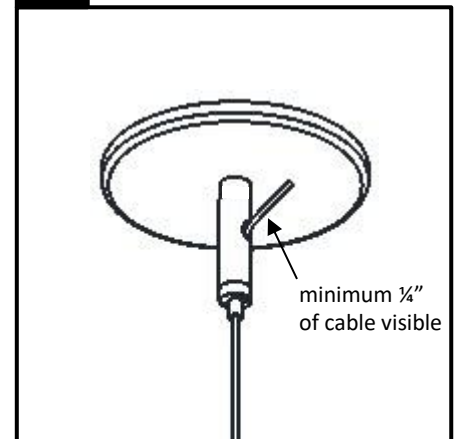

Ensure cable exits side of cable gripper.

Trim excess cable after the desired height is determined and luminaire is level.

IMPORTANT: Leave a minimum ¼" of cable visible outside gripper.

Tip: To prevent cable from fraying, apply a small amount of super glue to cut end.



ATTENTION: Install in accordance with local and national building and electrical codes.

07 Ceiling Mount (Power Location)


ATTENTION:

Install in accordance with national and local electrical codes and building codes.

ATTENTION: Refer to associated luminaire installation instructions to complete installation.


(e.g. leveling, joining, powered and non powered mounts.)

08 Install cable into gripper

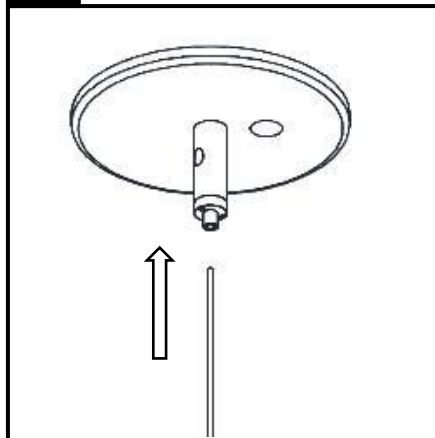

Insert suspension cable in cable gripper.
Refer to luminaire installation instructions for leveling and finishing steps.

09 Fixture levelling

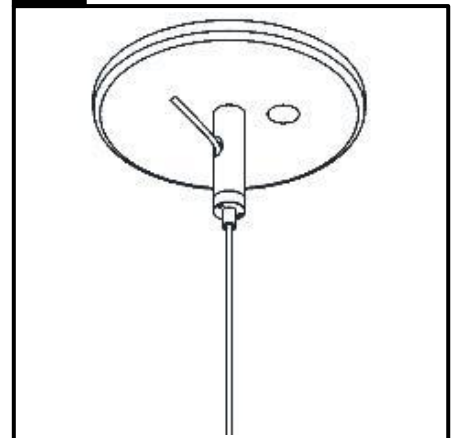


Ensure cable exits side of cable gripper.
Trim excess cable after the desired height is determined and luminaire is level.

IMPORTANT: Leave a minimum ¼" of cable visible outside gripper.

Tip: To prevent cable from fraying, apply a small amount of super glue to cut end.

10 Power cord installation

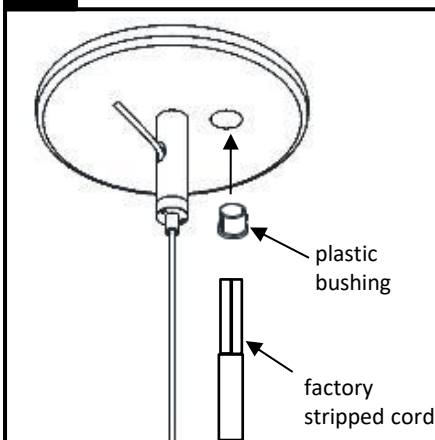


Insert plastic bushing into canopy hole.
Match bushing color to power cord provided.

Note: White canopies do not require a plastic bushing.

Feed factory stripped power cord through plastic bushing and pull above ceiling.

11 Power cord installation

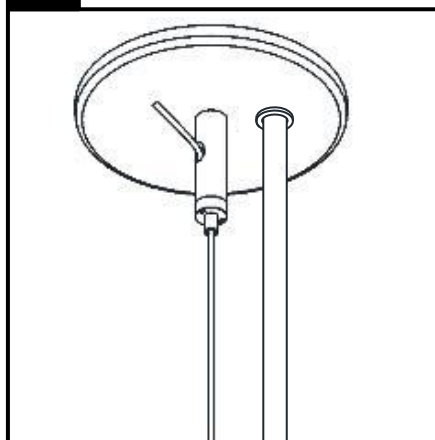

Refer to luminaire installation instructions for leveling and finishing steps.

Pull excess power cord above ceiling and route towards driver box. Refer to driver box installation instructions to complete installation.



ATTENTION: Install in accordance with local and national building and electrical codes.

INSTALLATION

WARNINGS AND INSTRUCTIONS FOR LUMINAIRES

IMPORTANT: THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

FOR YOUR PROTECTION, YOU MUST CAREFULLY READ ALL WARNINGS AND INSTRUCTIONS IN THEIR ENTIRETY PRIOR TO INSTALLATION, OPERATION, SERVICE OR MAINTENANCE. FAILURE TO DO SO CAN RESULT IN DEATH, PERSONAL INJURY AND PROPERTY DAMAGE. If you do not understand these warnings and instructions, or if additional information is desired, please contact the Customer Care Call Center at 800-555-0050.

• **Installation, service and maintenance of luminaires must be performed by a qualified professional and in accordance with all federal, state and local laws, regulations and electrical codes. This professional should be familiar with the construction and operation of this product and any hazards involved. If not qualified, do not attempt installation, service or maintenance.**

• **To reduce the risk of death, personal injury or property damage from fire, electric shock, falling parts, cuts, abrasions and other hazards, please read all warnings and instructions included with the luminaire, on the luminaire's packaging and affixed to the luminaire itself.**

• **Maintenance of the luminaires should be performed by person(s) familiar with the luminaire's construction and operation and any hazards involved.**



WARNING

RISK OF FIRE, ELECTRIC SHOCK OR PERSONAL INJURY

- Disconnect or turn off power before attempting any installation, service or maintenance.
- Verify that supply voltage is correct by referencing the luminaire label information.
- Make all electrical and ground connections in accordance with the National Electrical Code (NEC) and any other applicable laws, regulations or codes.
- All wiring connections should be capped with UL-approved wire connectors.



WARNING

RISK OF PERSONAL INJURY

- Wear gloves and safety glasses at all times when removing luminaire from carton, installing, servicing or performing maintenance.
- Avoid direct eye exposure to the light source while it is on.



WARNING

RISK OF FIRE, ELECTRIC SHOCK OR PERSONAL INJURY

- Allow LED/lamp & lens to cool before handling.
- Do not touch enclosure or light source.
- Do not exceed maximum wattage marked on luminaire label.
- Follow all manufacturer's warnings, recommendations, instructions and restrictions for driver type, burning position, mounting locations and replacement.



WARNING

RISK OF FIRE OR PERSONAL INJURY

- Keep combustible materials away from LED/lamp & lens.
- Do not operate in close proximity to persons, combustible materials or substances affected by heat or drying.



CAUTION

RISK OF PRODUCT DAMAGE

- Never connect luminaires and/or components under load with supply voltage turned on.
- Do not mount or support these luminaires in a manner that can cut the outer jacket or damage wire insulation.
- Do not restrict fixture ventilation. Allow for some volume of airspace around luminaire. Avoid covering luminaire with insulation, foam or other material that will prevent convection or conduction cooling.
- Do not exceed luminaire maximum ambient temperature.
- Do not modify the luminaire.
- Only use luminaire in its intended application and location.
- LED products are polarity sensitive. Ensure proper polarity before installation.
- Electrostatic Discharge (ESD) can damage LED. Personal grounding equipment must be worn during all installation and servicing of the luminaire.
- Do not touch individual electrical components as this can cause ESD, shorten LED life, or impact LED performance.
- Some components inside the luminaire may not be serviceable. In the unlikely event your luminaire may require service, stop using it immediately and contact the Customer Care Call Center at 800-555-0050.
- Always read the luminaire's complete installation instructions prior to installation for any additional luminaire specific warnings.
- In the case of HID or Fluorescent luminaires, regular re-lamping is required to keep luminaire operating within safe limits
- **Do not install damaged product.** Handling and installing damaged products can potentially increase the risks mentioned. In case of damage and/or missing parts upon arrival of the luminaire, please contact the Customer Care Call Center at 800-555-0050.
- These instructions do not purport to cover all details or variations in equipment nor to provide every possible contingency to meet in connection with installation, operation or maintenance. Should further information be desired, or should particular problems arise which are not covered sufficiently for the purchaser's or owner's purposes, this matter should be referred to the Customer Care Call Center at 800-555-0050. Please see luminaire specific Installation and Maintenance Instruction for additional warnings or any applicable FCC or regulatory statements. Failure to follow any of these instructions could void luminaire warranties.

Luminaire Maintenance

- Regular luminaire maintenance programs are recommended.
- It is recommended to clean the outside of the luminaire and the refractor/lens.
- Frequency of cleaning will depend on ambient dirt level and minimum light output which is acceptable to user.
- If clean water is not sufficient for cleaning, use a neutral, synthetic, non-scratching and non-abrasive cleaning substance.
- Never use alkaline and/or acetous cleaning substances.
- Make sure that the cleaning substance is carefully removed by rinsing with lots of clean water.
- Signify recommends using a cleaning solution that has a PH between 5 and 8.
- Recycle: For information on how to recycle electronic products and components, please visit www.epa.gov.

442294653951 - REV B



LEDALITE

Architectural Mounting

D3 Cable Mount

IS-D3 Non-Accessible Ceiling 0°-90° Slope Mount

IMPORTANT: Read **ALL** installation instructions including fixture/sensor wiring, mechanical details and warnings **before** beginning installation. Sensor wiring is found in the [LEDALITE CONTROLS DESIGN GUIDE: SENSOR INSTALLATION AND SET-UP](#)



D3 Non-Accessible Ceiling 0°-90° Slope Mount


What is Included in this package:

D3-P0 - D3 Non-Accessible Ceiling 0°-90° Slope Mount

IMPORTANT: Read all instructions **before** beginning installation.

D3 – P0


1. Top bracket (x1)
2. #10-32 x 1-1/2" machine screw (x1)
3. Bottom bracket (x1)
4. #10-32 nylon lock nut (x1)
5. 1/4"-20 bushing (x2)
6. Cable gripper (x1)

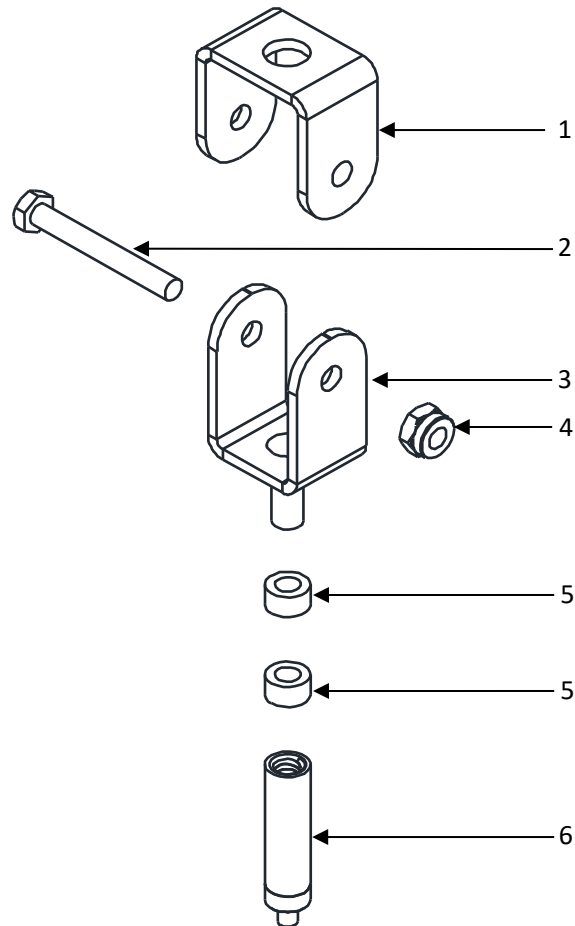

PLEASE RETAIN PACKAGE FOR FUTURE REFERENCE


TOOLS REQUIRED: Drill, screwdriver, cable cutters, pliers, 5/16" and 3/8" wrenches, blue Loctite, super glue

! ATTENTION: Install in accordance with local and national building and electrical codes.

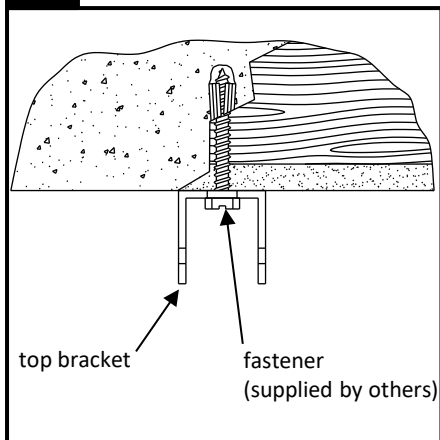
01 Install Top Bracket

Select an appropriate fastener which will support a load of 1500lbs. and accommodate a 3/8" diameter hole to attach the bracket to the structure. Secure top bracket to structure at location specified on application drawings.

ATTENTION: The fastener which is attached to the structure must safely support a load of 1500lbs.

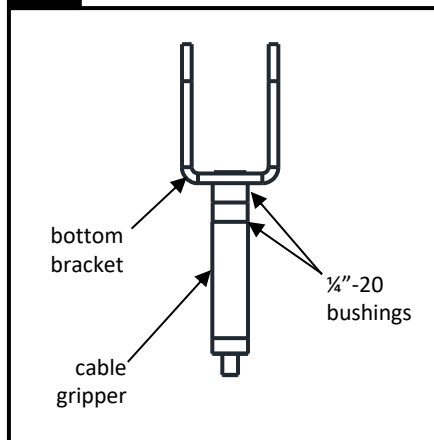
02 Prepare Bottom Bracket**IMPORTANT:**

Install first 1/4"-20 bushing to bottom bracket 1/4"-20 stud. Using rubber lined pliers fully tighten first bushing to bottom bracket stud. Repeat this step to install and fully tighten second bushing. Apply a small amount of blue Loctite to bracket stud and fully tighten cable gripper using rubber lined pliers.

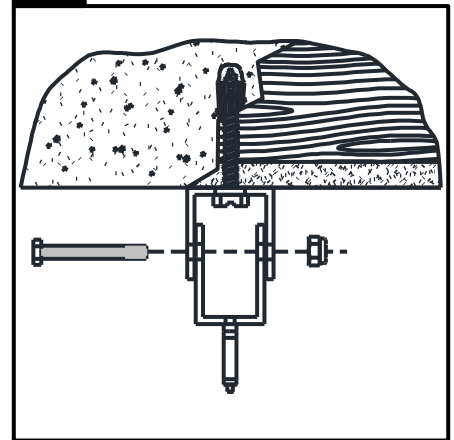
03 Install Bottom Bracket

Connect top and bottom brackets using supplied #10-32 x 1-1/2" screw and lock nut.

IMPORTANT: Fully tighten hardware to secure brackets in position.

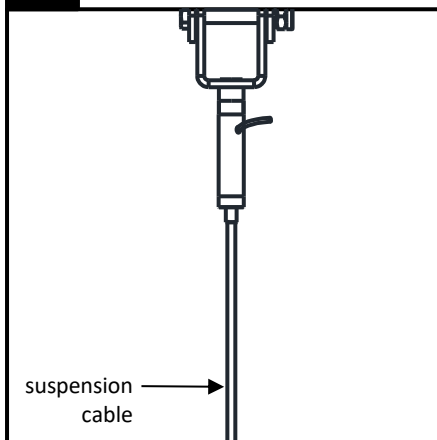04 Install Suspension Cable


Insert suspension cable in cable gripper. Refer to luminaire installation instructions for leveling and finishing steps.

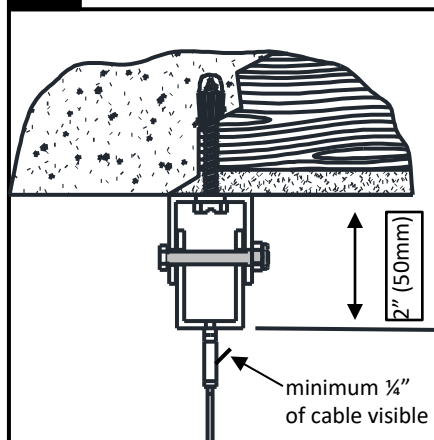05 Install Suspension Cable

Ensure cable end exits side of gripper. Trim excess cable after the desired height is determined and luminaire is level.

IMPORTANT: Leave a minimum 1/4" of cable visible outside gripper.

Tip: To prevent cable from fraying, apply a small amount of super glue to cut end.

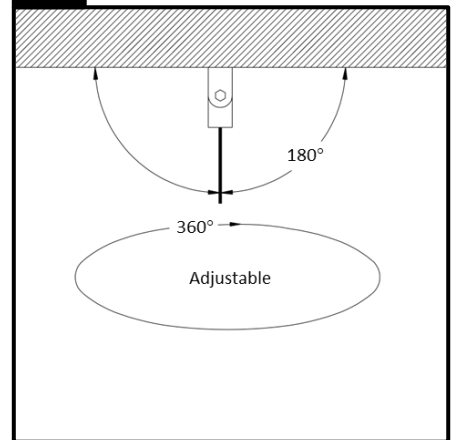06 Adjustment

Adjust the brackets as per requirement of fixture mounting according to the top mounting plane.



ATTENTION: Install in accordance with local and national building and electrical codes.

INSTALLATION

WARNINGS AND INSTRUCTIONS FOR LUMINAIRES

IMPORTANT: THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

FOR YOUR PROTECTION, YOU MUST CAREFULLY READ ALL WARNINGS AND INSTRUCTIONS IN THEIR ENTIRETY PRIOR TO INSTALLATION, OPERATION, SERVICE OR MAINTENANCE. FAILURE TO DO SO CAN RESULT IN DEATH, PERSONAL INJURY AND PROPERTY DAMAGE. If you do not understand these warnings and instructions, or if additional information is desired, please contact the Customer Care Call Center at 800-555-0050.

• **Installation, service and maintenance of luminaires must be performed by a qualified professional and in accordance with all federal, state and local laws, regulations and electrical codes. This professional should be familiar with the construction and operation of this product and any hazards involved. If not qualified, do not attempt installation, service or maintenance.**

• **To reduce the risk of death, personal injury or property damage from fire, electric shock, falling parts, cuts, abrasions and other hazards, please read all warnings and instructions included with the luminaire, on the luminaire's packaging and affixed to the luminaire itself.**

• **Maintenance of the luminaires should be performed by person(s) familiar with the luminaire's construction and operation and any hazards involved.**



WARNING

RISK OF FIRE, ELECTRIC SHOCK OR PERSONAL INJURY

- Disconnect or turn off power before attempting any installation, service or maintenance.
- Verify that supply voltage is correct by referencing the luminaire label information.
- Make all electrical and ground connections in accordance with the National Electrical Code (NEC) and any other applicable laws, regulations or codes.
- All wiring connections should be capped with UL-approved wire connectors.



WARNING

RISK OF PERSONAL INJURY

- Wear gloves and safety glasses at all times when removing luminaire from carton, installing, servicing or performing maintenance.
- Avoid direct eye exposure to the light source while it is on.



WARNING

RISK OF FIRE, ELECTRIC SHOCK OR PERSONAL INJURY

- Allow LED/lamp & lens to cool before handling.
- Do not touch enclosure or light source.
- Do not exceed maximum wattage marked on luminaire label.
- Follow all manufacturer's warnings, recommendations, instructions and restrictions for driver type, burning position, mounting locations and replacement.



WARNING

RISK OF FIRE OR PERSONAL INJURY

- Keep combustible materials away from LED/lamp & lens.
- Do not operate in close proximity to persons, combustible materials or substances affected by heat or drying.



CAUTION

RISK OF PRODUCT DAMAGE

- Never connect luminaires and/or components under load with supply voltage turned on.
- Do not mount or support these luminaires in a manner that can cut the outer jacket or damage wire insulation.
- Do not restrict fixture ventilation. Allow for some volume of airspace around luminaire. Avoid covering luminaire with insulation, foam or other material that will prevent convection or conduction cooling.
- Do not exceed luminaire maximum ambient temperature.
- Do not modify the luminaire.
- Only use luminaire in its intended application and location.
- LED products are polarity sensitive. Ensure proper polarity before installation.
- Electrostatic Discharge (ESD) can damage LED. Personal grounding equipment must be worn during all installation and servicing of the luminaire.
- Do not touch individual electrical components as this can cause ESD, shorten LED life, or impact LED performance.
- Some components inside the luminaire may not be serviceable. In the unlikely event your luminaire may require service, stop using it immediately and contact the Customer Care Call Center at 800-555-0050.
- Always read the luminaire's complete installation instructions prior to installation for any additional luminaire specific warnings.
- In the case of HID or Fluorescent luminaires, regular re-lamping is required to keep luminaire operating within safe limits
- **Do not install damaged product.** Handling and installing damaged products can potentially increase the risks mentioned. In case of damage and/or missing parts upon arrival of the luminaire, please contact the Customer Care Call Center at 800-555-0050.
- These instructions do not purport to cover all details or variations in equipment nor to provide every possible contingency to meet in connection with installation, operation or maintenance. Should further information be desired, or should particular problems arise which are not covered sufficiently for the purchaser's or owner's purposes, this matter should be referred to the Customer Care Call Center at 800-555-0050. Please see luminaire specific Installation and Maintenance Instruction for additional warnings or any applicable FCC or regulatory statements. Failure to follow any of these instructions could void luminaire warranties.

Luminaire Maintenance

- Regular luminaire maintenance programs are recommended.
- It is recommended to clean the outside of the luminaire and the refractor/lens.
- Frequency of cleaning will depend on ambient dirt level and minimum light output which is acceptable to user.
- If clean water is not sufficient for cleaning, use a neutral, synthetic, non-scratching and non-abrasive cleaning substance.
- Never use alkaline and/or acetous cleaning substances.
- Make sure that the cleaning substance is carefully removed by rinsing with lots of clean water.
- Signify recommends using a cleaning solution that has a PH between 5 and 8.
- Recycle: For information on how to recycle electronic products and components, please visit www.epa.gov.

442294653951 - REV B



LEDALITE

Architectural Mounting

D5 Cable Mount

IS-D5 24" Span Grid Mount

IMPORTANT: Read **ALL** installation instructions including fixture/sensor wiring, mechanical details and warnings **before** beginning installation. Sensor wiring is found in the [LEDALITE CONTROLS DESIGN GUIDE: SENSOR INSTALLATION AND SET-UP](#)



D5 24" Span Grid Mount

What is Included in this package:


D5-P0 - D5 24" Span Grid Mount without Power

D5-P1 - D5 24" Span Grid Mount with Power

IMPORTANT: Read all instructions **before** beginning installation.

D5-P0

1. Caddy 512HDTc t-grid box hanger (x1)
2. 1/4"-20x3" screw (x1)
3. 9/16" diameter washers (x2)
4. 1/4"-20 nut (x3)
5. 3" canopy non power (x1)
6. 1/4"-20 bushing (x1)
7. Cable gripper (x1)

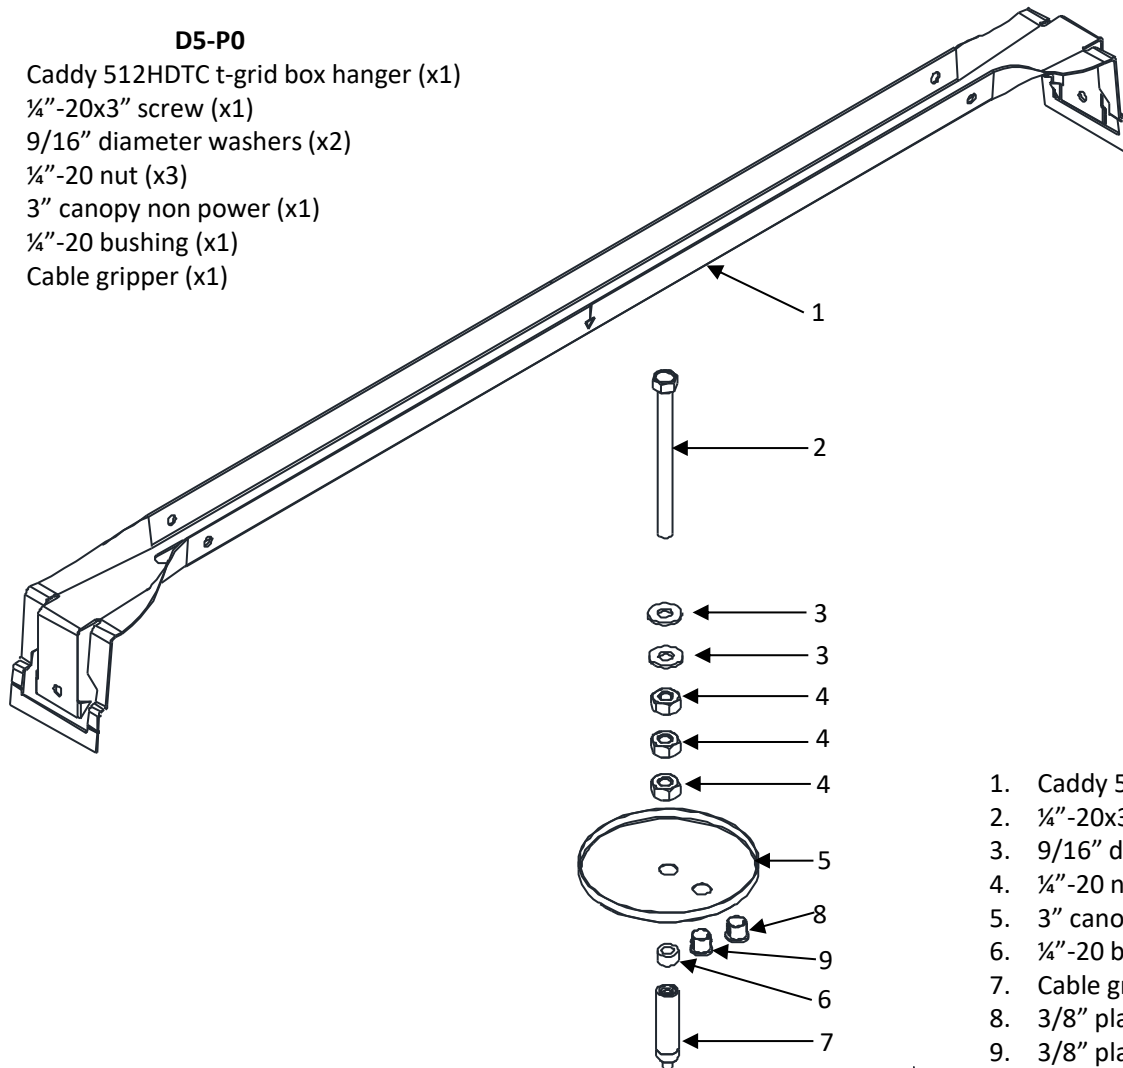

D5-P1

1. Caddy 512HDTc t-grid box hanger (x1)
2. 1/4"-20x3" screw (x1)
3. 9/16" diameter washers (x2)
4. 1/4"-20 nut (x3)
5. 3" canopy 1 power (x1)
6. 1/4"-20 bushing (x1)
7. Cable gripper (x1)
8. 3/8" plastic bushing black (x1)
9. 3/8" plastic bushing white (x1)

PLEASE RETAIN PACKAGE FOR FUTURE REFERENCE

TOOLS REQUIRED: Hole saw, cable cutters, pliers, 7/16" wrenches, blue Loctite, super glue


! ATTENTION: Install in accordance with local and national building and electrical codes.

01 Mount Installation


Non-power mount installation is covered in steps 2 to 9 of this document.

Power mount installation is covered in steps 10 to 12 of this document.


Refer to supplied layout drawings to determine exact mounting locations.

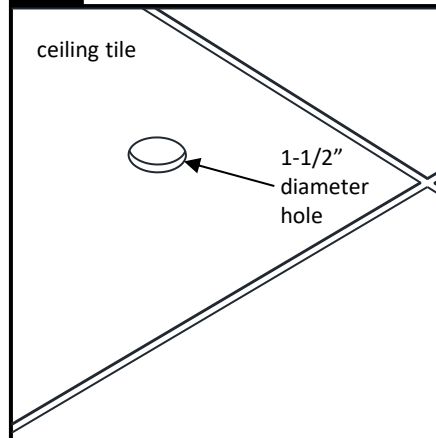02 Ceiling Tile Preparation


Refer to supplied layout drawings to determine exact mount location. From below ceiling, using a hole saw, drill a 1-1/2" hole in tile at required mounting location.

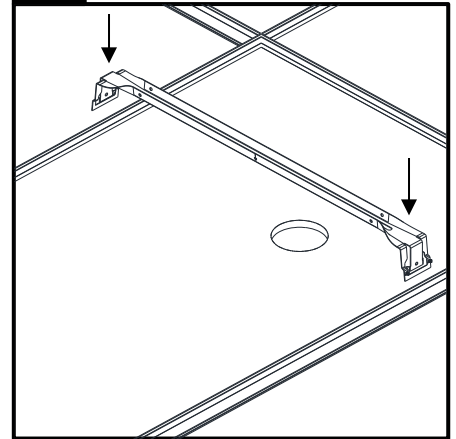03 24" Hanger Installation

Remove adjacent ceiling tile. From above ceiling, locate supplied 24" crossbar above mounting location and snap to t-bar grid.

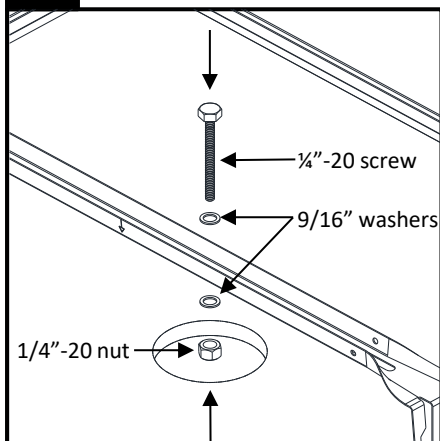04 Hardware Installation


Install supplied 1/4"-20 screw, 9/16" diameter washers and 1/4"-20 nut as shown. Center above mounting hole and fully tighten to supplied 24" crossbar.

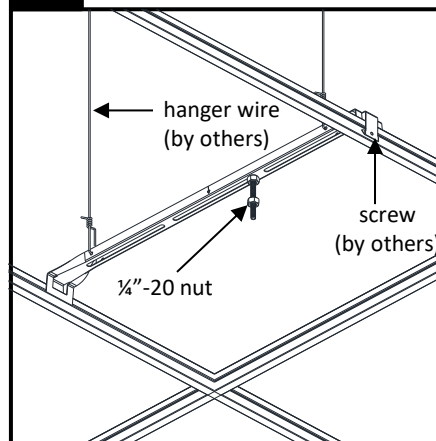05 24" Hanger Installation

Attach hanger wires (supplied by others) to support crossbar to structure. From below ceiling, install second 1/4"-20 nut onto 1/4"-20 bolt.

IMPORTANT: Lock 24" crossbar to t-grid using appropriate hardware (supplied by others).

Install 1/4"-20 nut approximately 11/16" from bottom of 1/4"-20 screw.

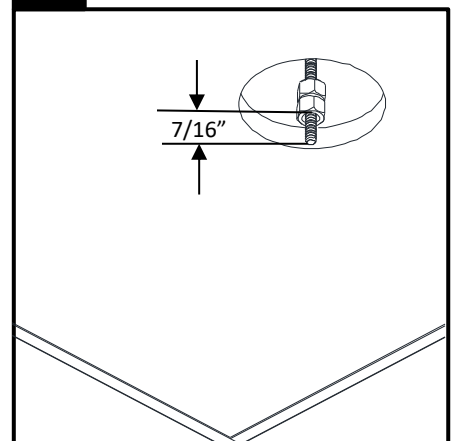
06 Hardware Installation

Install the last 1/4"-20 nut just below nut installed in step 5.

**IMPORTANT:**

Before final tightening, ensure bottom of nut is 7/16" away from end of 1/4"-20 screw. **FULLY TIGHTEN BOTH 1/4"-20 NUTS TOGETHER TO LOCK IN POSITION.**


! **ATTENTION:** Install in accordance with local and national building and electrical codes.

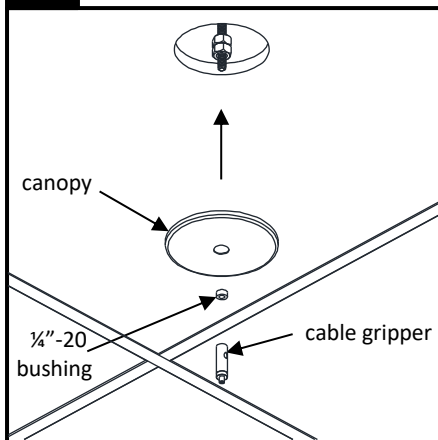07 Cable Gripper Installation


Slide the canopy overtop the 1/4"-20 screw and secure in place with 1/4"20 bushing.

IMPORTANT: Use rubber lined pliers to fully tighten bushing against canopy.

IMPORTANT: Apply a small amount of blue Loctite to end of 1/4"-20 screw. Use rubber lined pliers to fully tighten cable gripper against canopy and 1/4"-20 screw.

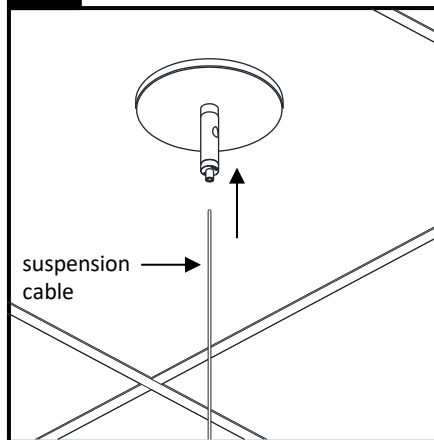08 Install Suspension Cable


Insert suspension cable in cable gripper. Refer to luminaire installation instructions for leveling and finishing steps.

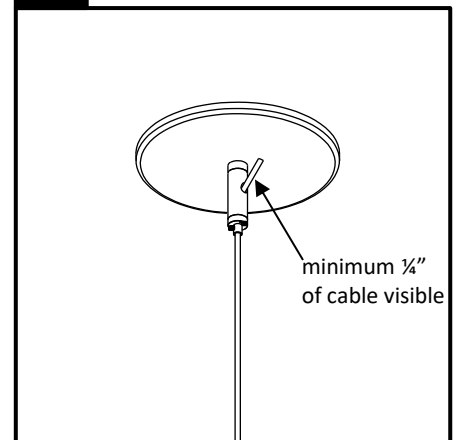09 Install Suspension Cable

Ensure cable end exists side of gripper. Trim excess cable after the desired height is determined and luminaire is level.

IMPORTANT: Leave a minimum 1/4" of cable visible outside gripper.


Tip: To prevent cable from fraying, apply a small amount of super glue to cut end.

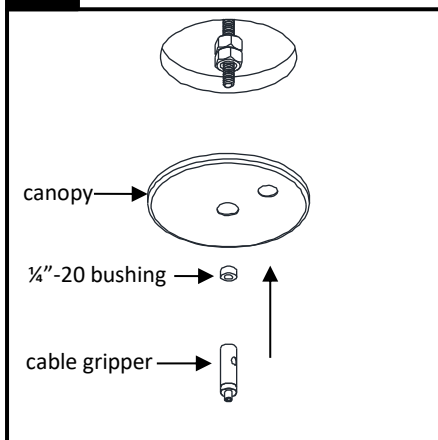10 Install Power Canopy

Slide the canopy overtop the 1/4"-20 screw and secure in place with 1/4"20 bushing.

IMPORTANT: Use rubber lined pliers to fully tighten bushing against canopy.


IMPORTANT: Apply a small amount of blue Loctite to end of 1/4"-20 screw. Use rubber lined pliers to fully tighten cable gripper against canopy and 1/4"-20 screw.

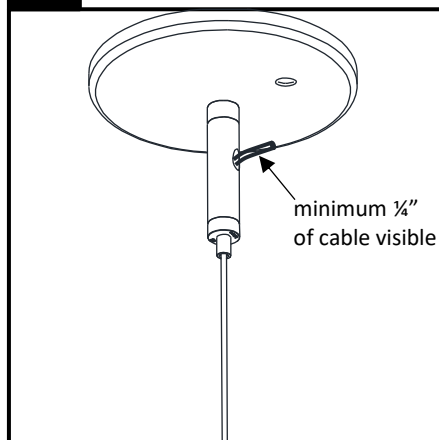11 Install Suspension Cable

Insert suspension cable in cable gripper. Refer to luminaire installation instructions for leveling and finishing steps.

IMPORTANT: Leave a minimum 1/4" of cable visible outside gripper.

Tip: To prevent cable from fraying, apply a small amount of super glue to cut end.

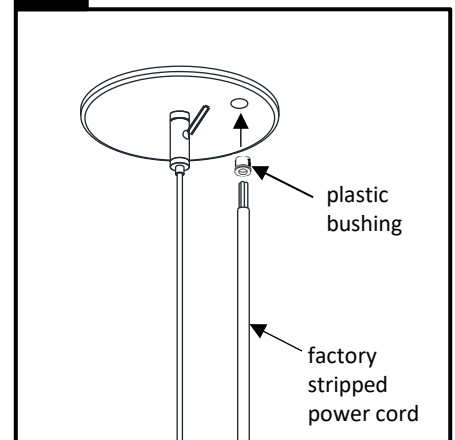12 Install Power Cord

Insert plastic bushing into canopy hole. Match bushing color to power cord.

Note: White canopies do not require a plastic bushing.

Feed factory stripped power cord through plastic bushing and pull above ceiling.

Feed power cord to driver box location and follow driver box installation instructions.



ATTENTION: Install in accordance with local and national building and electrical codes.

INSTALLATION

WARNINGS AND INSTRUCTIONS FOR LUMINAIRES

IMPORTANT: THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

FOR YOUR PROTECTION, YOU MUST CAREFULLY READ ALL WARNINGS AND INSTRUCTIONS IN THEIR ENTIRETY PRIOR TO INSTALLATION, OPERATION, SERVICE OR MAINTENANCE. FAILURE TO DO SO CAN RESULT IN DEATH, PERSONAL INJURY AND PROPERTY DAMAGE. If you do not understand these warnings and instructions, or if additional information is desired, please contact the Customer Care Call Center at 800-555-0050.

• **Installation, service and maintenance of luminaires must be performed by a qualified professional and in accordance with all federal, state and local laws, regulations and electrical codes. This professional should be familiar with the construction and operation of this product and any hazards involved. If not qualified, do not attempt installation, service or maintenance.**

• **To reduce the risk of death, personal injury or property damage from fire, electric shock, falling parts, cuts, abrasions and other hazards, please read all warnings and instructions included with the luminaire, on the luminaire's packaging and affixed to the luminaire itself.**

• **Maintenance of the luminaires should be performed by person(s) familiar with the luminaire's construction and operation and any hazards involved.**



WARNING

RISK OF FIRE, ELECTRIC SHOCK OR PERSONAL INJURY

- Disconnect or turn off power before attempting any installation, service or maintenance.
- Verify that supply voltage is correct by referencing the luminaire label information.
- Make all electrical and ground connections in accordance with the National Electrical Code (NEC) and any other applicable laws, regulations or codes.
- All wiring connections should be capped with UL-approved wire connectors.



WARNING

RISK OF PERSONAL INJURY

- Wear gloves and safety glasses at all times when removing luminaire from carton, installing, servicing or performing maintenance.
- Avoid direct eye exposure to the light source while it is on.



WARNING

RISK OF FIRE, ELECTRIC SHOCK OR PERSONAL INJURY

- Allow LED/lamp & lens to cool before handling.
- Do not touch enclosure or light source.
- Do not exceed maximum wattage marked on luminaire label.
- Follow all manufacturer's warnings, recommendations, instructions and restrictions for driver type, burning position, mounting locations and replacement.



WARNING

RISK OF FIRE OR PERSONAL INJURY

- Keep combustible materials away from LED/lamp & lens.
- Do not operate in close proximity to persons, combustible materials or substances affected by heat or drying.



CAUTION

RISK OF PRODUCT DAMAGE

- Never connect luminaires and/or components under load with supply voltage turned on.
- Do not mount or support these luminaires in a manner that can cut the outer jacket or damage wire insulation.
- Do not restrict fixture ventilation. Allow for some volume of airspace around luminaire. Avoid covering luminaire with insulation, foam or other material that will prevent convection or conduction cooling.
- Do not exceed luminaire maximum ambient temperature.
- Do not modify the luminaire.
- Only use luminaire in its intended application and location.
- LED products are polarity sensitive. Ensure proper polarity before installation.
- Electrostatic Discharge (ESD) can damage LED. Personal grounding equipment must be worn during all installation and servicing of the luminaire.
- Do not touch individual electrical components as this can cause ESD, shorten LED life, or impact LED performance.
- Some components inside the luminaire may not be serviceable. In the unlikely event your luminaire may require service, stop using it immediately and contact the Customer Care Call Center at 800-555-0050.
- Always read the luminaire's complete installation instructions prior to installation for any additional luminaire specific warnings.
- In the case of HID or Fluorescent luminaires, regular re-lamping is required to keep luminaire operating within safe limits
- **Do not install damaged product.** Handling and installing damaged products can potentially increase the risks mentioned. In case of damage and/or missing parts upon arrival of the luminaire, please contact the Customer Care Call Center at 800-555-0050.
- These instructions do not purport to cover all details or variations in equipment nor to provide every possible contingency to meet in connection with installation, operation or maintenance. Should further information be desired, or should particular problems arise which are not covered sufficiently for the purchaser's or owner's purposes, this matter should be referred to the Customer Care Call Center at 800-555-0050. Please see luminaire specific Installation and Maintenance Instruction for additional warnings or any applicable FCC or regulatory statements. Failure to follow any of these instructions could void luminaire warranties.

Luminaire Maintenance

- Regular luminaire maintenance programs are recommended.
- It is recommended to clean the outside of the luminaire and the refractor/lens.
- Frequency of cleaning will depend on ambient dirt level and minimum light output which is acceptable to user.
- If clean water is not sufficient for cleaning, use a neutral, synthetic, non-scratching and non-abrasive cleaning substance.
- Never use alkaline and/or acetous cleaning substances.
- Make sure that the cleaning substance is carefully removed by rinsing with lots of clean water.
- Signify recommends using a cleaning solution that has a PH between 5 and 8.
- Recycle: For information on how to recycle electronic products and components, please visit www.epa.gov.

442294653951 - REV B



LEDALITE

Architectural Mounting

D6 Cable Mount

IS-D6 On Grid Mount

IMPORTANT: Read **ALL** installation instructions including fixture/sensor wiring, mechanical details and warnings **before** beginning installation. Sensor wiring is found in the [LEDALITE CONTROLS DESIGN GUIDE: SENSOR INSTALLATION AND SET-UP](#)



D6 On Grid Mount

What is Included in this package:





D6-P0 - D6 On Grid Mount Installation without Power

D6-P1 - D6 On Grid Mount Installation with Power

IMPORTANT: Read all instructions **before** beginning installation.




D6 – P0

1. Caddy clip (x1)
2. 3" canopy non power (x1)
3. 1/4"-20 bushings (x2)
4. Cable gripper (x1)

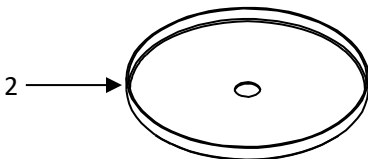

D6 – P1

1. Caddy clip (x1)
2. 3" canopy 1 power (x1)
3. 1/4"-20 bushing (x2)
4. Cable gripper (x1)
5. 3/8" plastic bushing black (x1)
6. 3/8" plastic bushing white (x1)

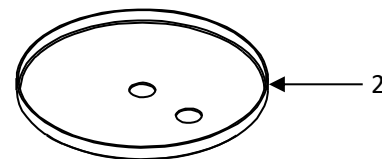

PLEASE RETAIN PACKAGE FOR FUTURE REFERENCE

TOOLS REQUIRED: Cable cutters, pliers, 7/16" wrenches, blue Loctite, super glue

! ATTENTION: Install in accordance with local and national building and electrical codes.


01 Ceiling Mount (Non-Power Location)

ATTENTION:
Refer to associated
installation instructions to
complete installation
(e.g, leveling, joining,
powered and non-powered
mounts.)

Note: 3 t-bar mounting kit options are available (15/16", 9/16" and 9/16"x 5/16" screw slot grid). Each mounting kit includes the required Caddy clip.


Important: Mounting system will support a maximum 65-lb static load.

02 Remove ceiling tile

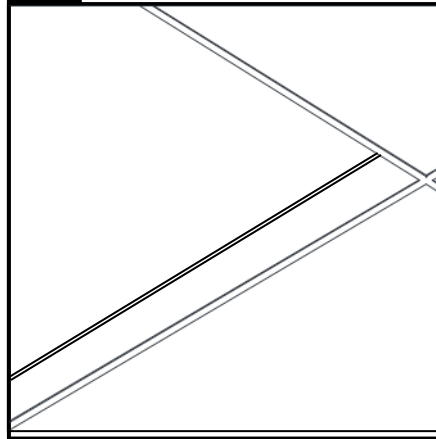


Remove ceiling tiles at mount location.

03 Install T-bar clip

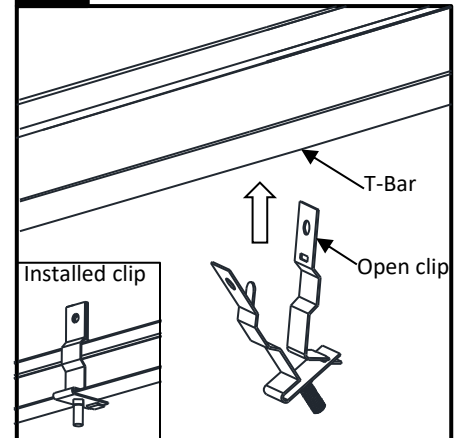


Disassemble supplied t-bar clip. Hook and lock into place around t-bar. Ensure tab locks and clicks inside open clip.

04 Secure clip

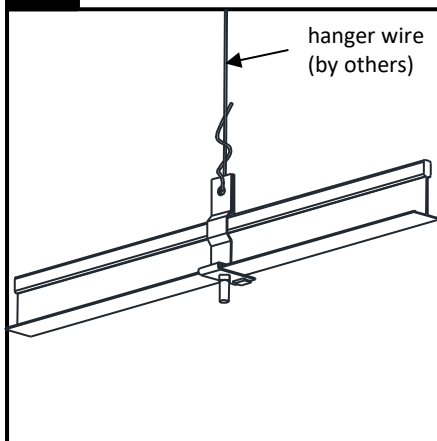

Secure t-bar clip to structure above using an approved hanger wire.


05 Install canopy

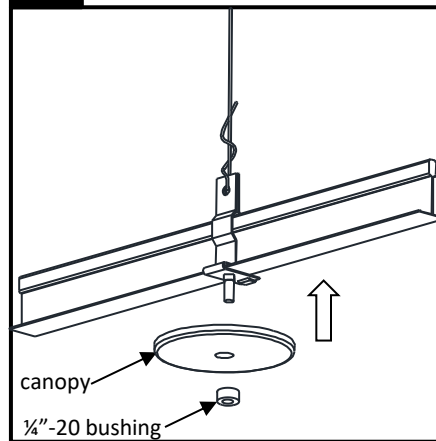

Slide the canopy overtop the t-bar clip bolt and secure in place with 1/4"-20 bushing.

IMPORTANT: Use rubber lined pliers to fully tighten bushing against canopy and t-bar clip stud.


06 Install 1/4"-20 Bushing

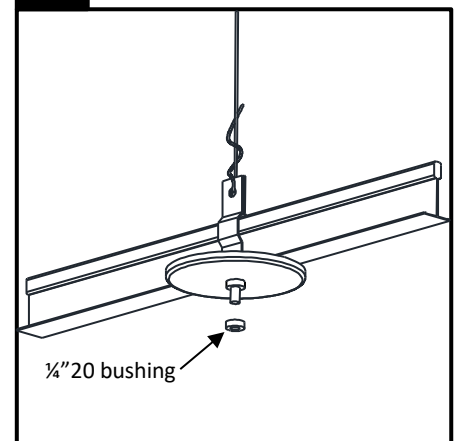


Install second 1/4"-20 bushing on t-bar clip stud.

IMPORTANT: Use rubber lined pliers to fully tighten second bushing against installed bushing.

! ATTENTION: Install in accordance with local and national building and electrical codes.

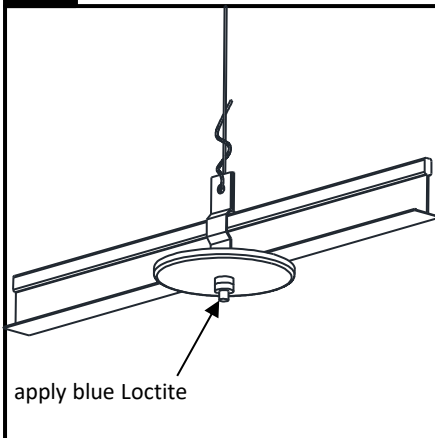
07 Install ¼-20 Bushing**IMPORTANT:**

Apply a small amount of blue Loctite to t-bar clip stud.

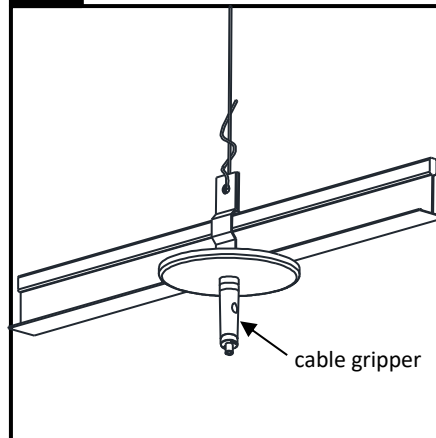08 Install Cable Gripper


Tighten cable gripper to T-bar clip stud.

IMPORTANT: Use rubber lined pliers to fully tighten gripper to t-bar clip stud.

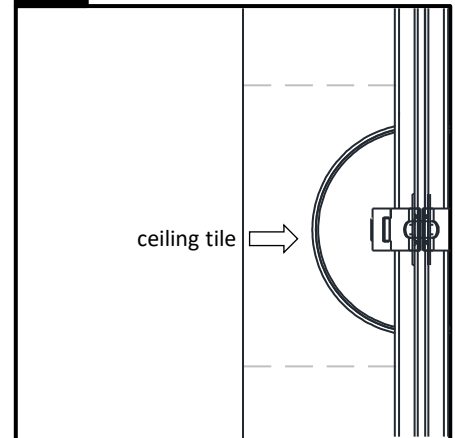
09 Install Ceiling Tiles

Replace ceiling tiles to their original positions.

Note: No cutting of ceiling tile is required at non power location.

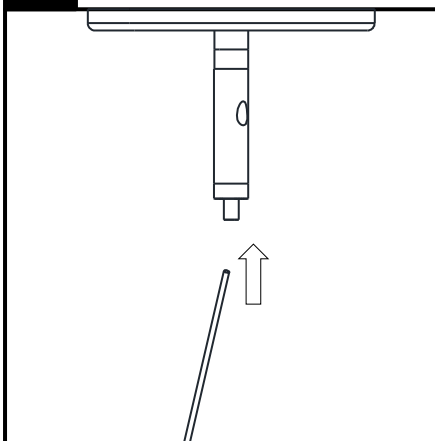10 Install suspension cable

Insert suspension cable in cable gripper.
Refer to luminaire installation instructions for leveling and finishing steps.

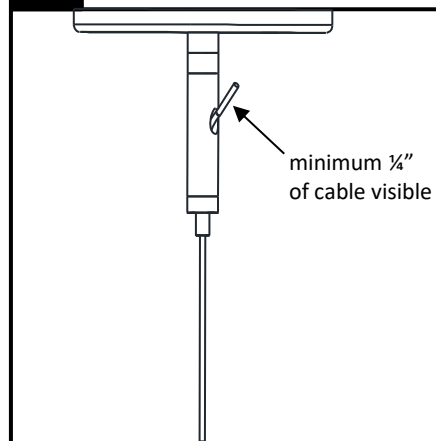11 Install suspension cable

Ensure cable end exits side of gripper.
Trim excess cable after the desired height is determined and luminaire is level.

IMPORTANT: Leave a minimum ¼" of cable visible outside gripper.


Tip: To prevent cable from fraying, apply a small amount of super glue to cut end.

**12 Ceiling Mount
(Power Feed Location)**

For power
feed location
repeat
steps 1 to 11.

Follow steps 13-15 on next page to complete power location installation.


! **ATTENTION: Install in accordance with local and national building and electrical codes.**

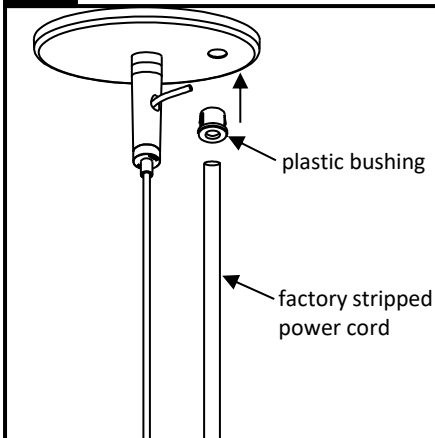13 Install Power Cord


Insert plastic bushing into canopy hole.
Match bushing color to power cord.

Note: White canopies do not require a plastic bushing.

Feed factory stripped power cord through plastic bushing and pull above ceiling.

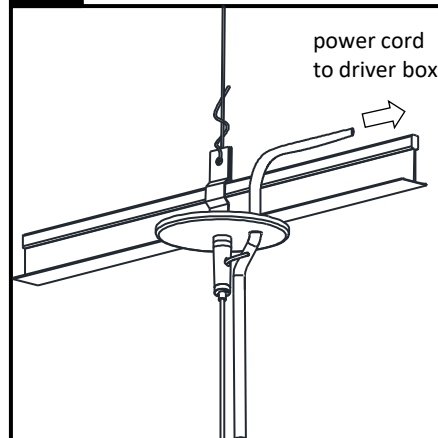14 Install Power Cord

Feed power cord to driver box location and follow driver box installation instructions.

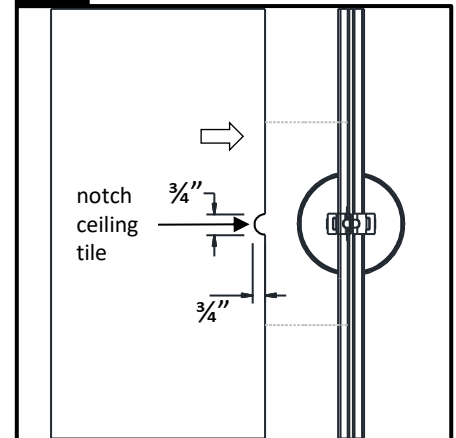15 Install Ceiling Tiles

Notch ceiling tile to accommodate power cord location. Replace all ceiling tiles.



ATTENTION: Install in accordance with local and national building and electrical codes.

INSTALLATION

WARNINGS AND INSTRUCTIONS FOR LUMINAIRES

IMPORTANT: THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

FOR YOUR PROTECTION, YOU MUST CAREFULLY READ ALL WARNINGS AND INSTRUCTIONS IN THEIR ENTIRETY PRIOR TO INSTALLATION, OPERATION, SERVICE OR MAINTENANCE. FAILURE TO DO SO CAN RESULT IN DEATH, PERSONAL INJURY AND PROPERTY DAMAGE. If you do not understand these warnings and instructions, or if additional information is desired, please contact the Customer Care Call Center at 800-555-0050.

• **Installation, service and maintenance of luminaires must be performed by a qualified professional and in accordance with all federal, state and local laws, regulations and electrical codes. This professional should be familiar with the construction and operation of this product and any hazards involved. If not qualified, do not attempt installation, service or maintenance.**

• **To reduce the risk of death, personal injury or property damage from fire, electric shock, falling parts, cuts, abrasions and other hazards, please read all warnings and instructions included with the luminaire, on the luminaire's packaging and affixed to the luminaire itself.**

• **Maintenance of the luminaires should be performed by person(s) familiar with the luminaire's construction and operation and any hazards involved.**



WARNING

RISK OF FIRE, ELECTRIC SHOCK OR PERSONAL INJURY

- Disconnect or turn off power before attempting any installation, service or maintenance.
- Verify that supply voltage is correct by referencing the luminaire label information.
- Make all electrical and ground connections in accordance with the National Electrical Code (NEC) and any other applicable laws, regulations or codes.
- All wiring connections should be capped with UL-approved wire connectors.



WARNING

RISK OF PERSONAL INJURY

- Wear gloves and safety glasses at all times when removing luminaire from carton, installing, servicing or performing maintenance.
- Avoid direct eye exposure to the light source while it is on.



WARNING

RISK OF FIRE, ELECTRIC SHOCK OR PERSONAL INJURY

- Allow LED/lamp & lens to cool before handling.
- Do not touch enclosure or light source.
- Do not exceed maximum wattage marked on luminaire label.
- Follow all manufacturer's warnings, recommendations, instructions and restrictions for driver type, burning position, mounting locations and replacement.



WARNING

RISK OF FIRE OR PERSONAL INJURY

- Keep combustible materials away from LED/lamp & lens.
- Do not operate in close proximity to persons, combustible materials or substances affected by heat or drying.



CAUTION

RISK OF PRODUCT DAMAGE

- Never connect luminaires and/or components under load with supply voltage turned on.
- Do not mount or support these luminaires in a manner that can cut the outer jacket or damage wire insulation.
- Do not restrict fixture ventilation. Allow for some volume of airspace around luminaire. Avoid covering luminaire with insulation, foam or other material that will prevent convection or conduction cooling.
- Do not exceed luminaire maximum ambient temperature.
- Do not modify the luminaire.
- Only use luminaire in its intended application and location.
- LED products are polarity sensitive. Ensure proper polarity before installation.
- Electrostatic Discharge (ESD) can damage LED. Personal grounding equipment must be worn during all installation and servicing of the luminaire.
- Do not touch individual electrical components as this can cause ESD, shorten LED life, or impact LED performance.
- Some components inside the luminaire may not be serviceable. In the unlikely event your luminaire may require service, stop using it immediately and contact the Customer Care Call Center at 800-555-0050.
- Always read the luminaire's complete installation instructions prior to installation for any additional luminaire specific warnings.
- In the case of HID or Fluorescent luminaires, regular re-lamping is required to keep luminaire operating within safe limits
- **Do not install damaged product.** Handling and installing damaged products can potentially increase the risks mentioned. In case of damage and/or missing parts upon arrival of the luminaire, please contact the Customer Care Call Center at 800-555-0050.
- These instructions do not purport to cover all details or variations in equipment nor to provide every possible contingency to meet in connection with installation, operation or maintenance. Should further information be desired, or should particular problems arise which are not covered sufficiently for the purchaser's or owner's purposes, this matter should be referred to the Customer Care Call Center at 800-555-0050. Please see luminaire specific Installation and Maintenance Instruction for additional warnings or any applicable FCC or regulatory statements. Failure to follow any of these instructions could void luminaire warranties.

Luminaire Maintenance

- Regular luminaire maintenance programs are recommended.
- It is recommended to clean the outside of the luminaire and the refractor/lens.
- Frequency of cleaning will depend on ambient dirt level and minimum light output which is acceptable to user.
- If clean water is not sufficient for cleaning, use a neutral, synthetic, non-scratching and non-abrasive cleaning substance.
- Never use alkaline and/or acetous cleaning substances.
- Make sure that the cleaning substance is carefully removed by rinsing with lots of clean water.
- Signify recommends using a cleaning solution that has a PH between 5 and 8.
- Recycle: For information on how to recycle electronic products and components, please visit www.epa.gov.

442294653951 - REV B