




# PHILIPS

## Cleanroom RC150B


### Recessed/Surface mounted

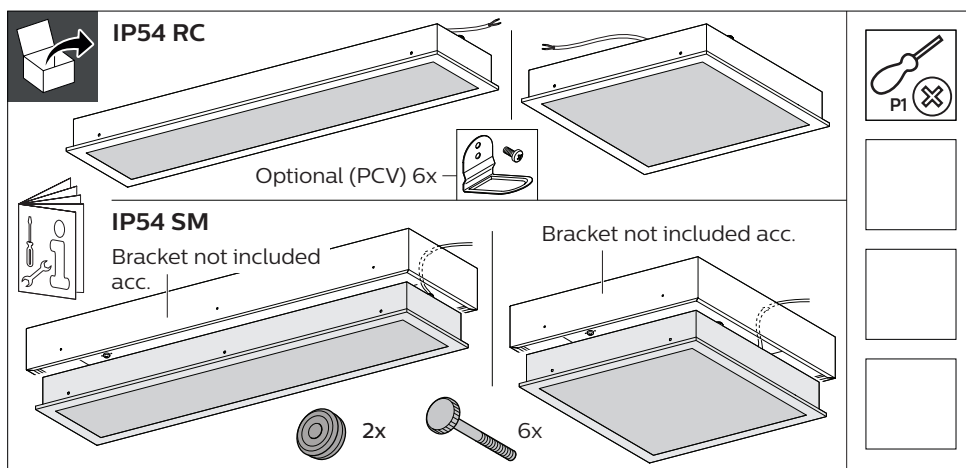

Configuration types		application	Size type	Lumen (lm)	Driver	A	B	kg
CR150B	RC	VPC/CPC/PCV	W60L60	3500/5500	PSU/PSD	595	595	6.0
	(Luminaire only)		W30L120			1195	295	6.5
	SM	Ceiling only	W60L60			630	630	9.5
	(Luminaire+bracket)		W30L120			1230	330	10.5

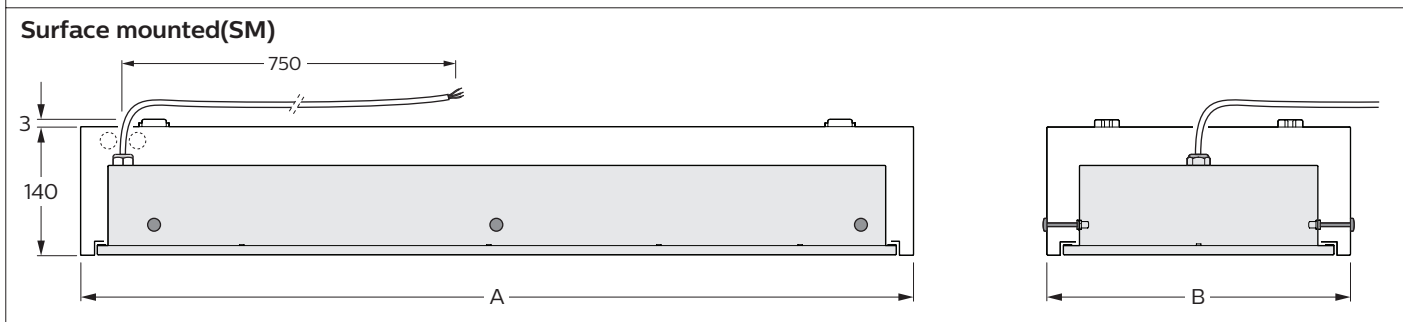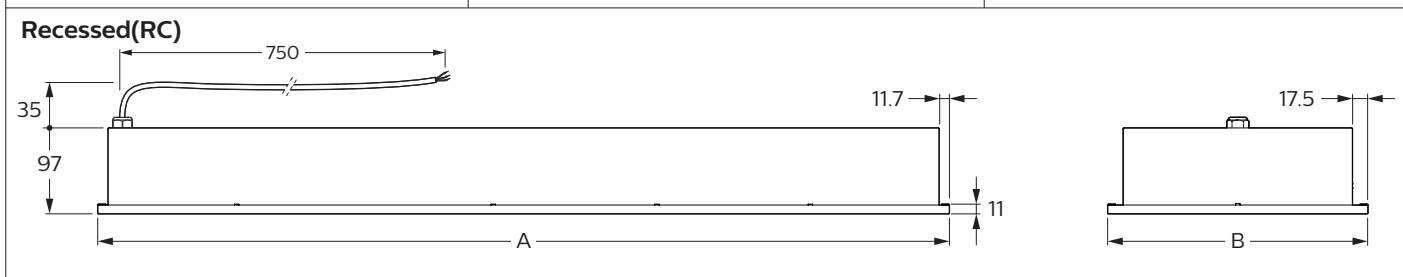

Inrush current		PSU		PSD	
		36W	75W	36W	75W
Imax (A)		13	21	4.8	4.6
Tref (μs)		270	220	750	900
MCB		Luminaire Max.			
B-10 A		15	15	15	15
B-16 A		24	24	24	24
B-24 A		37	37	37	37
C-10 A		25	25	25	25
C-16 A		40	40	40	40
C-24 A		62	62	62	62

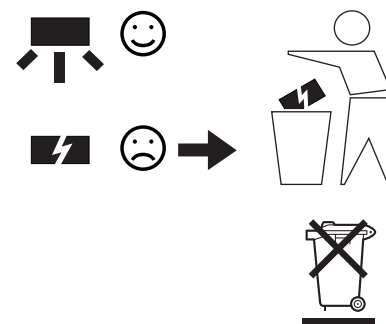





Optional:  
Safety cable




9109 300 30918

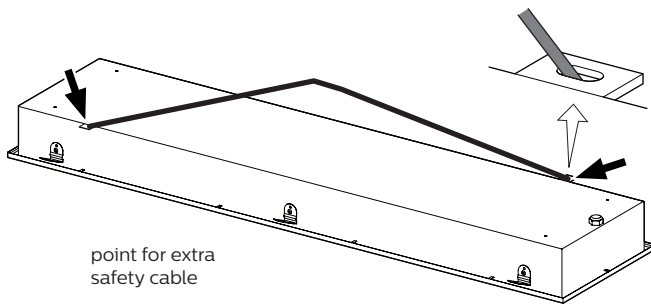


point for extra  
safety cable

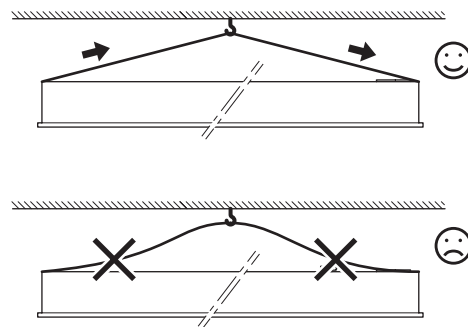

IP54 RC  
VPC (lay-in)

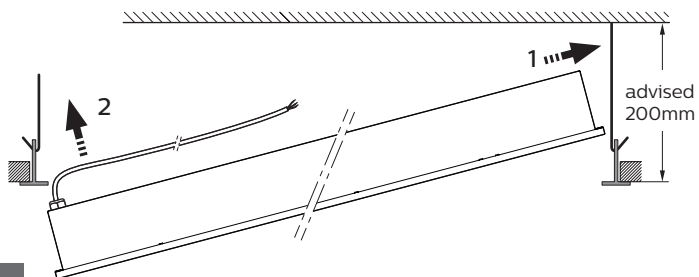

a

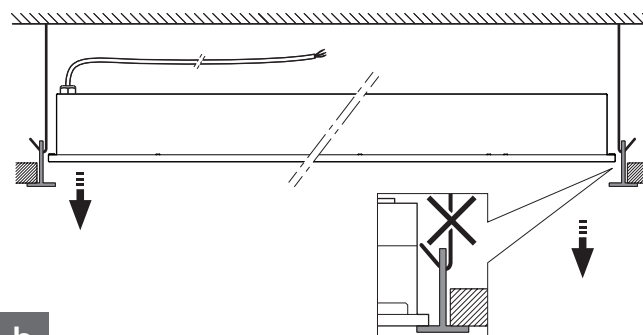


b

Optional: PCV/CPC




Always use in  
combination with  
safety cable.


		A(mm)	B(mm)
RC	W60L60	578	578
RC	W30L120	1183	278




- PCV Solid wood if necessary

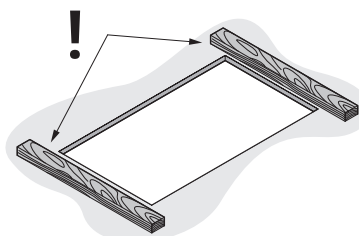


- CPC Solid wood if needed.




Choose hole position  
best-fit for application.

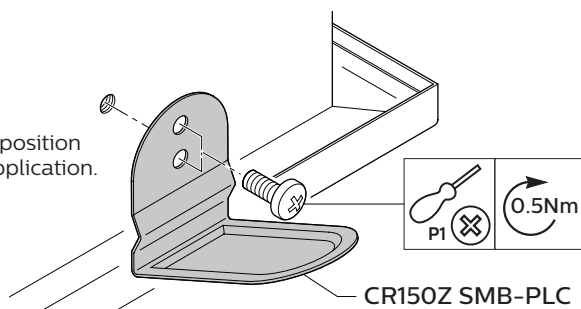


1

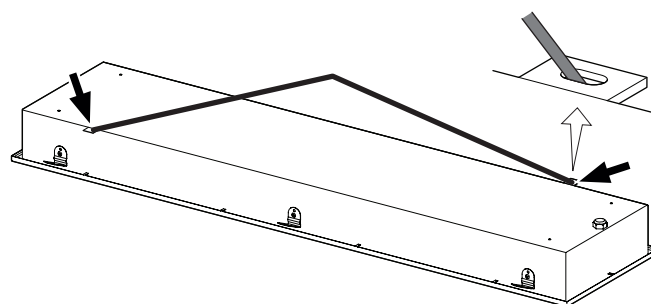

2



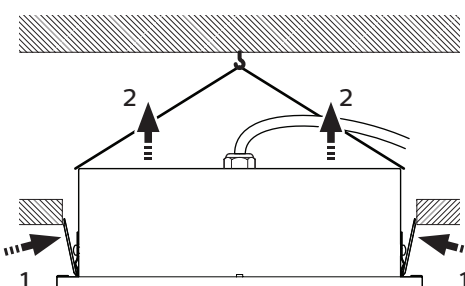


3a

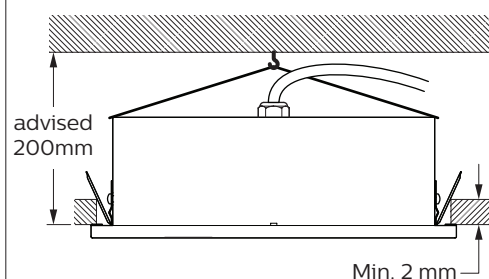

3b

## Optional: Surface mounted(S.M)

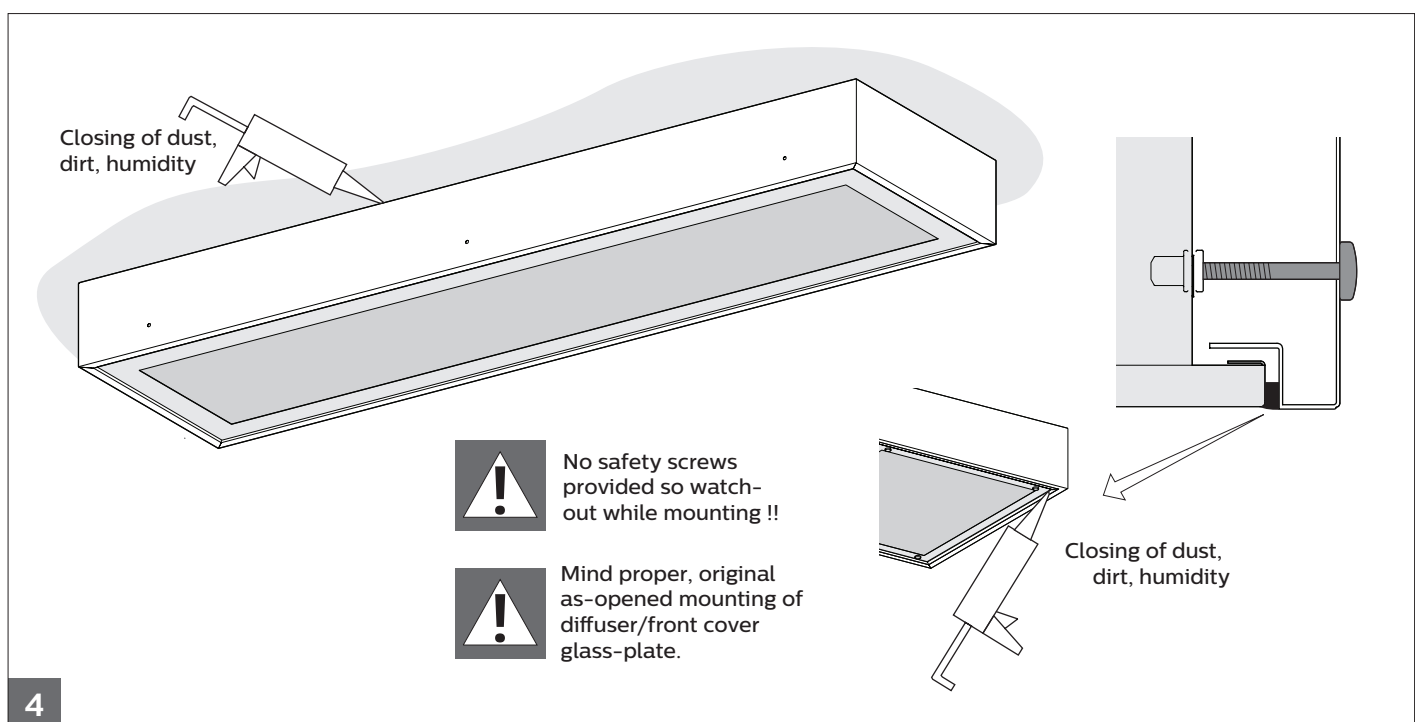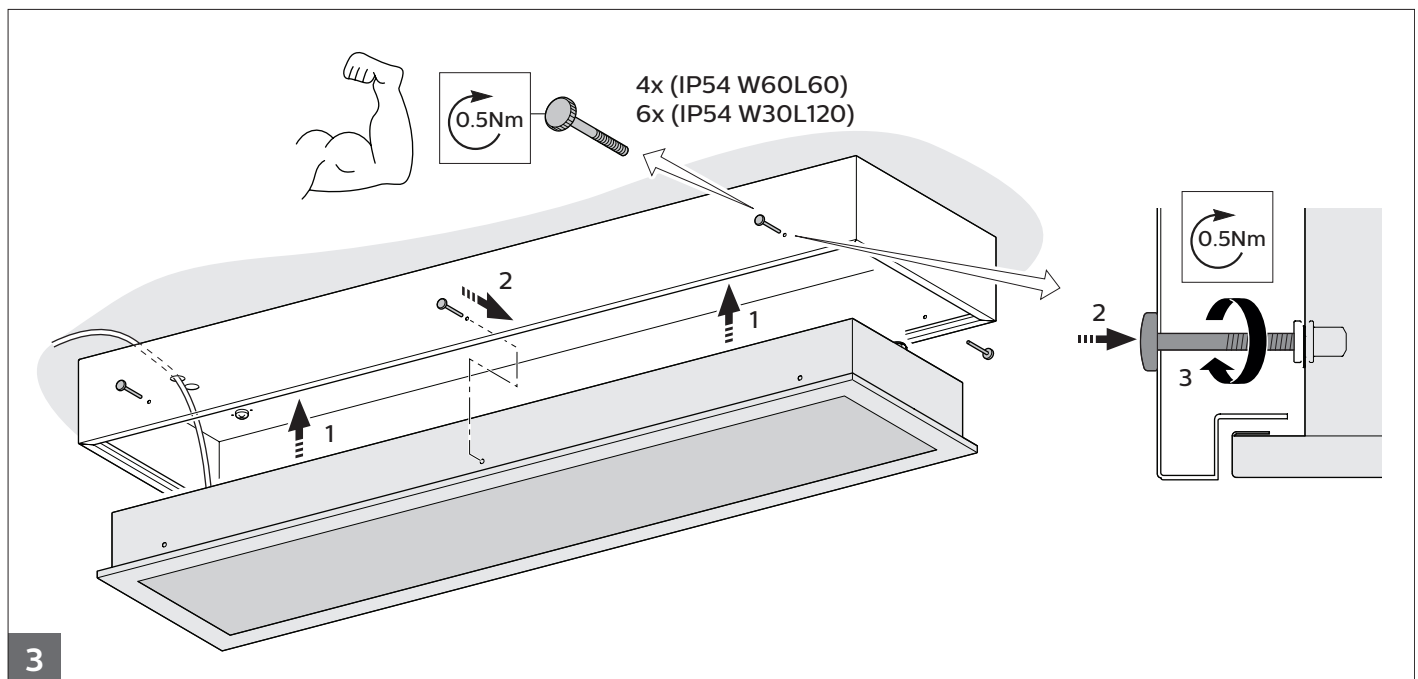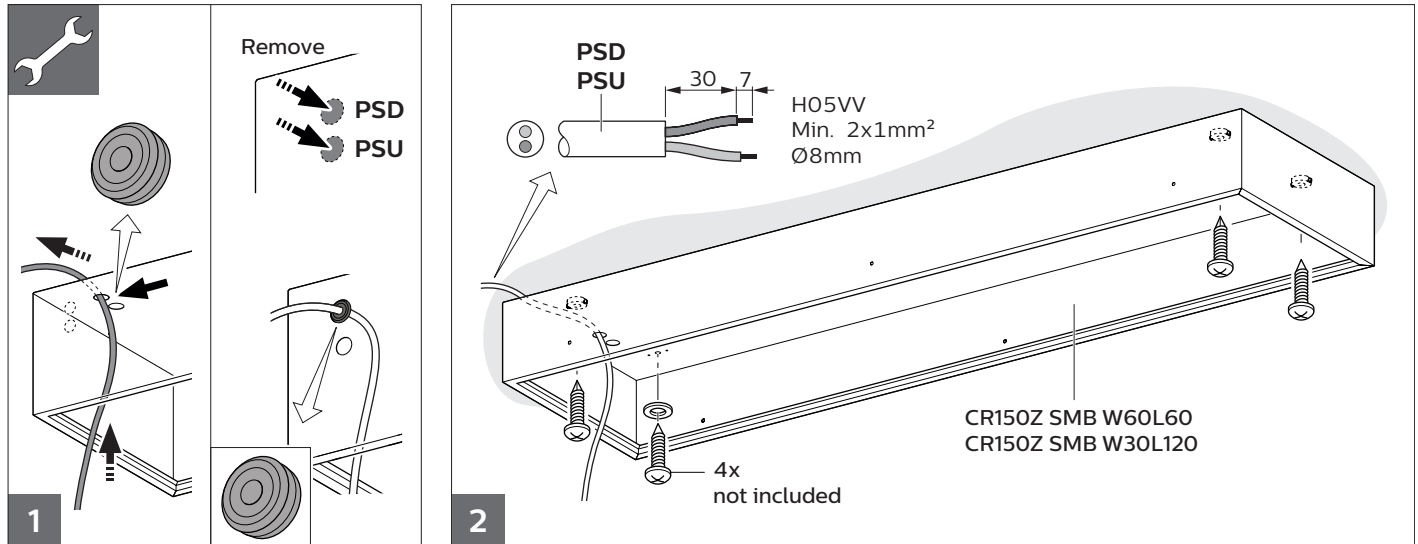



© 2016 Philips Lighting Holding B.V.

All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Philips Lighting Holding B.V.  
The Netherlands