


PHILIPS


CoreLine tempo medium

BVP125

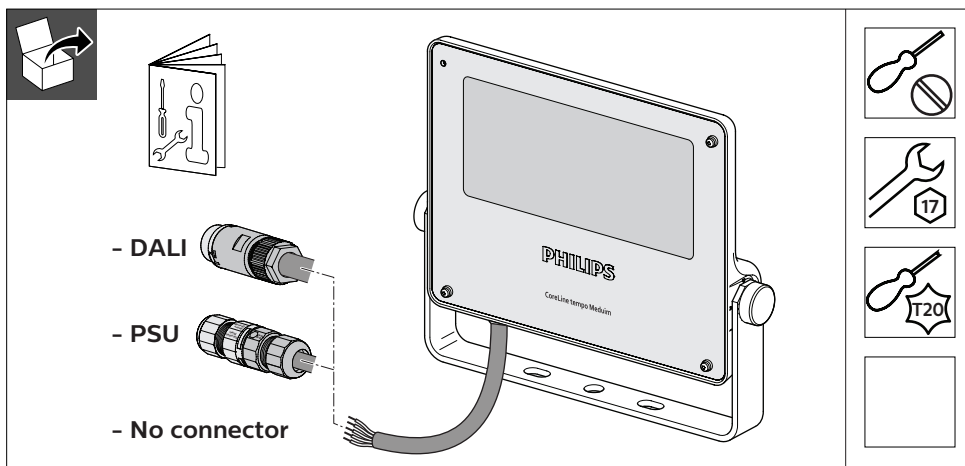


	Luminaire Flux (lm)	Power (W)	CCT	CRI	Beam	m ²	kg
BVP125 LED120-4S/740	12000	95	4000	70			
BVP125 LED80-4S/740	8000	63			S/OFA52	0.9	4.4
BVP125 LED98-4S/830	9800	97	3000	80			
BVP125 LED67-4S/830	6700	67					

Dimensions in mm

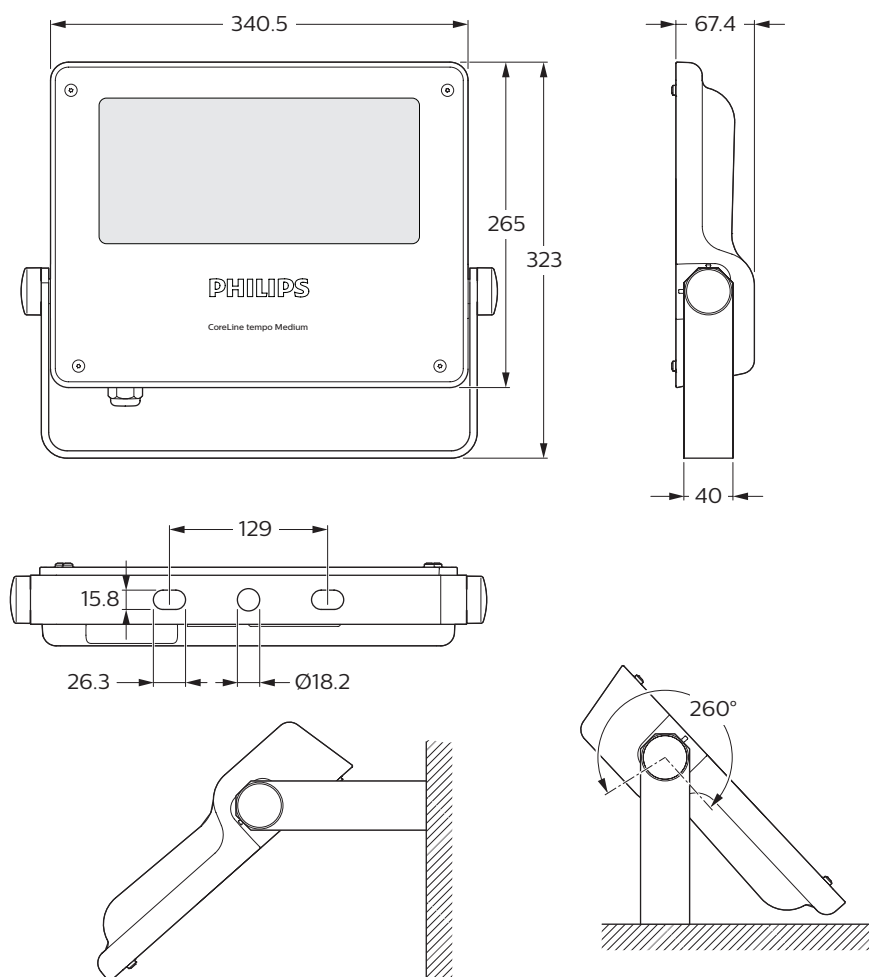

Inrush current

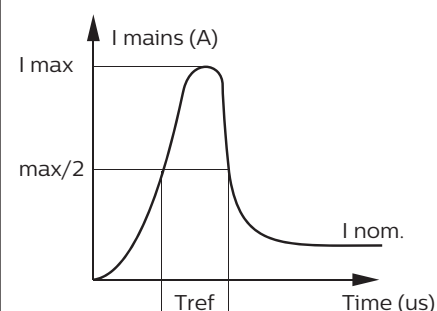


	LED120	LED80
Electrical characteristics		
I _{max} (A)	53	53
T _{ref} (μs)	300	300
Surge protection(kv)	6 (diff. mode) 8 (comm. mode)	
MCB	Max. luminaires	
B-10 A	4	4
B-13 A	4	4
B-16 A	4	4
B-20 A	8	8
B-25 A	12	12
C-10 A	8	8
C-13 A	10	10
C-16 A	13	13
C-20 A	16	16
C-25 A	20	20



Install the luminaire according to the national regulations.


1a

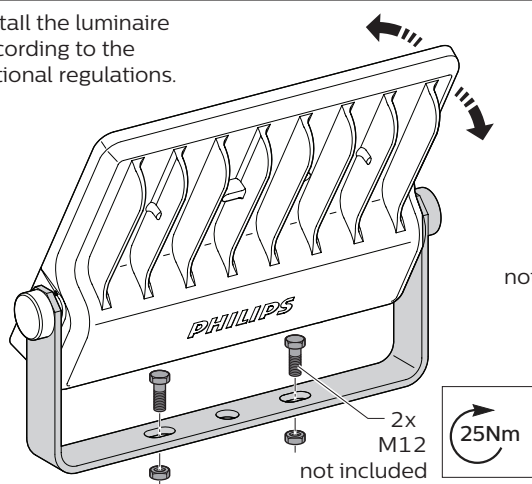

not included


1b

In case of using only the central hole fixation and if the luminaire is higher >3 m, the use of 2nd fixing security system is mandatory.

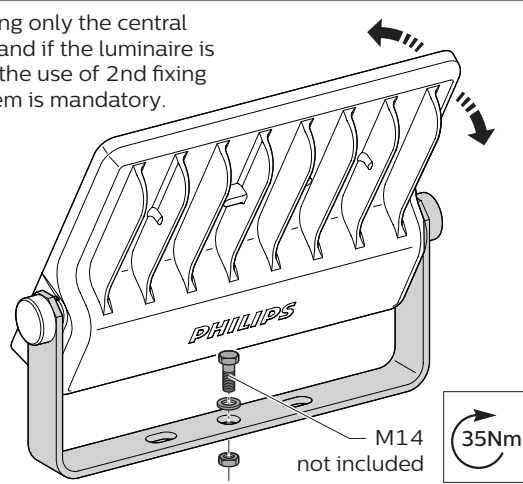


not included


2a

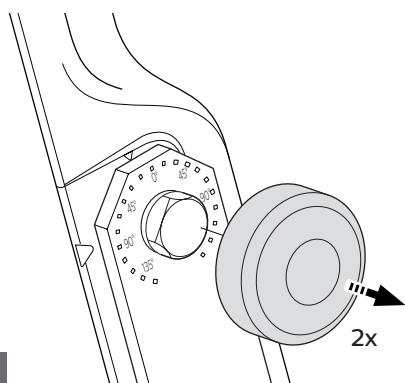


2b

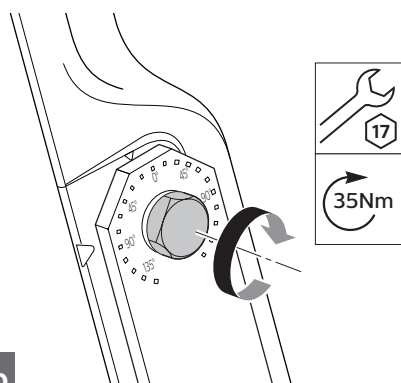


2c

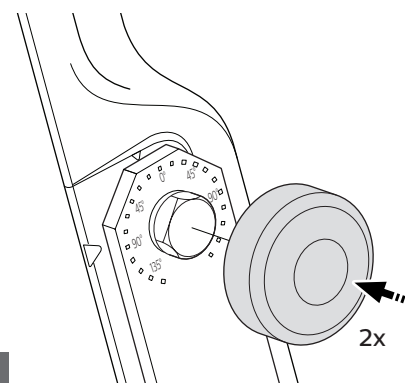


3a

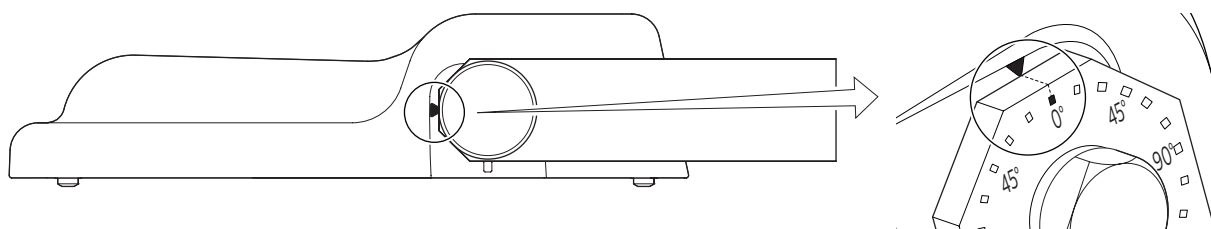


PSU with 3 poles connector



Blue (N)
Yellow-Green (PE)
Brown (L)




Min. 3x1,0 mm²
Max. 3x2,5 mm²
Ø 7-Ø 12 mm

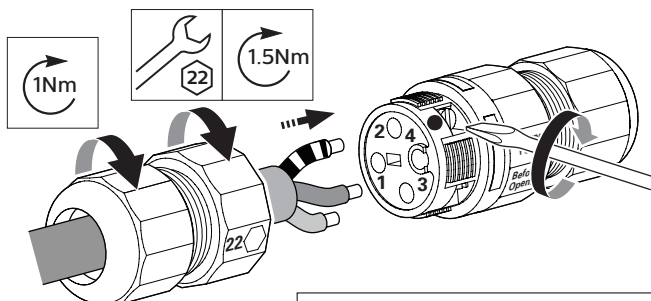

DALI with 5 poles connector

Black (+ DA)
Grey (- DA)
Yellow-Green (PE)
Blue (N)
Brown (L)

Min. 5x0,25 mm²
Max. 5x1,50 mm²
Ø 7-Ø 12 mm

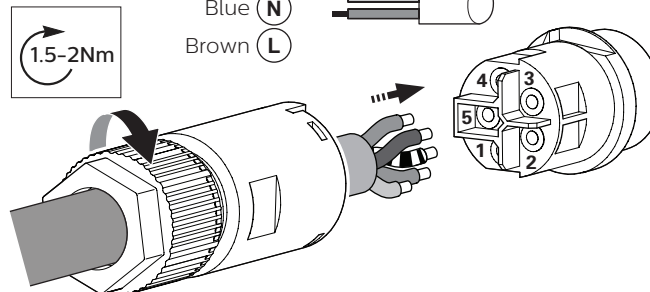

Connector position	PSU connector 3 poles	DALI connector 5 poles
1	-	N (blue)
2	L (brown)	DALI+ (black)
3	N (blue)	DALI- (grey)
4	ground (yellow/green)	L (brown)
5	-	ground (yellow/green)


No connector (L brown, N blue, GRD yellow/green, DALI- grey and DALI+ black)

3b







glass maintenance instruction.




The luminaire power should be switched off before opening.

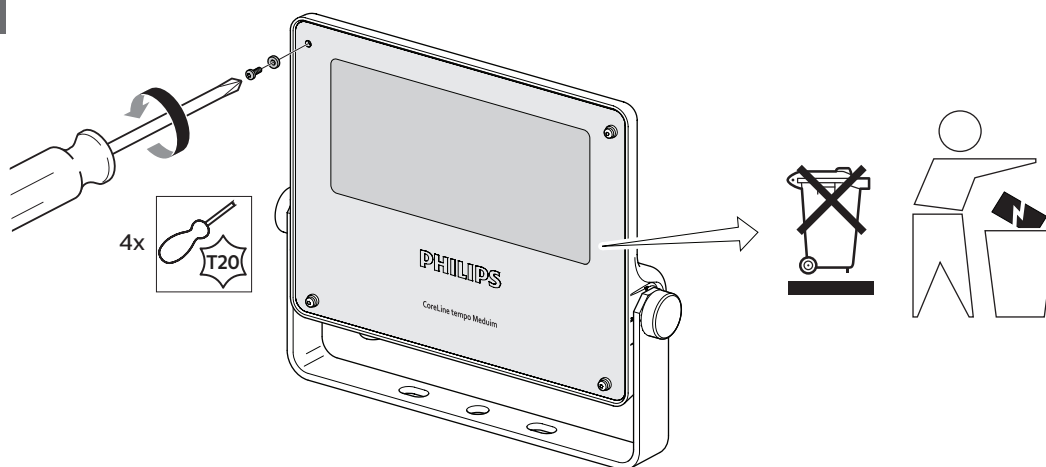

4a

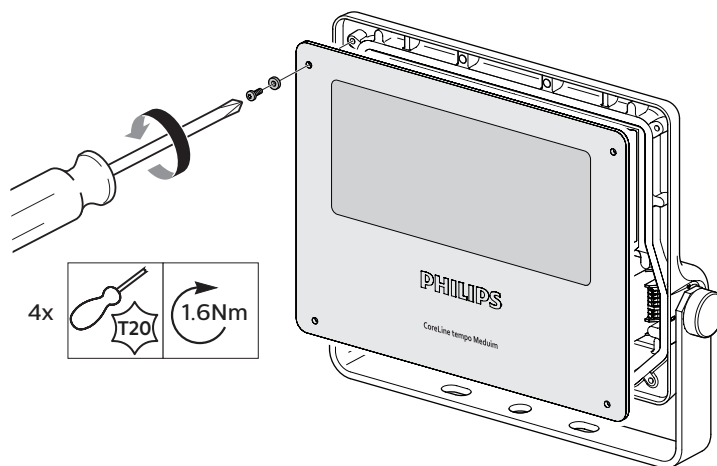

4b

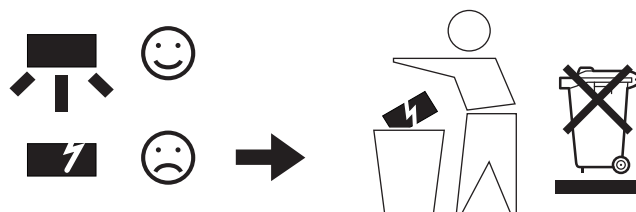

- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
- The luminaire shall be installed or maintained by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements.
- If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
- Outdoor use only.



© 2018 Philips Lighting Holding B.V.

All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Philips Lighting Holding B.V.
The Netherlands