






PHILIPS


Ledinaire Waterproof

WT060C

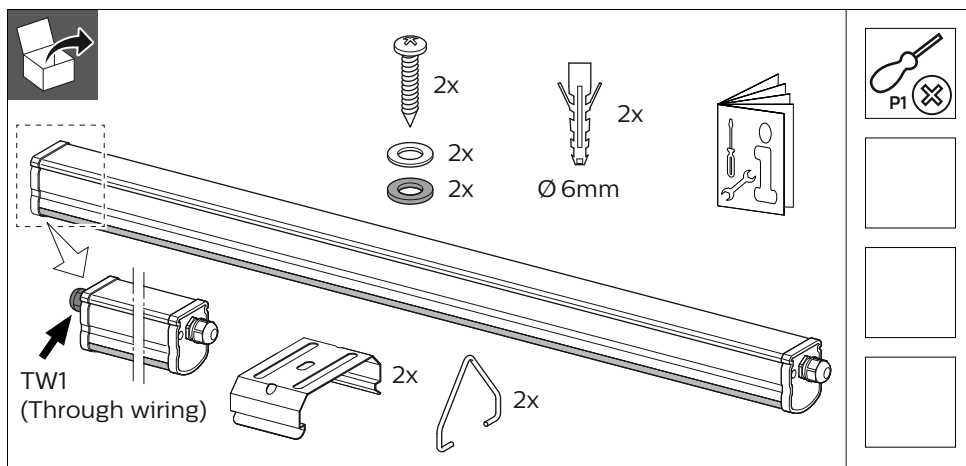


		System lumen (Lm)	CCT	Driver	P(W)	A	A-TW1	
WT060C LED18S/840 PSU L600	-	1800			19	650		0.7
WT060C LED18S/840 PSU TW1 L600	•						675	
WT060C LED36S/840 PSU L1200	-	3600	4000K	PSU	36	1250		1.1
WT060C LED36S/840 PSU TW1 L1200	•						1275	
WT060C LED56S/840 PSU L1500	-	5600			56	1550		1.3
WT060C LED56S/840 PSU TW1 L1500	•						1575	

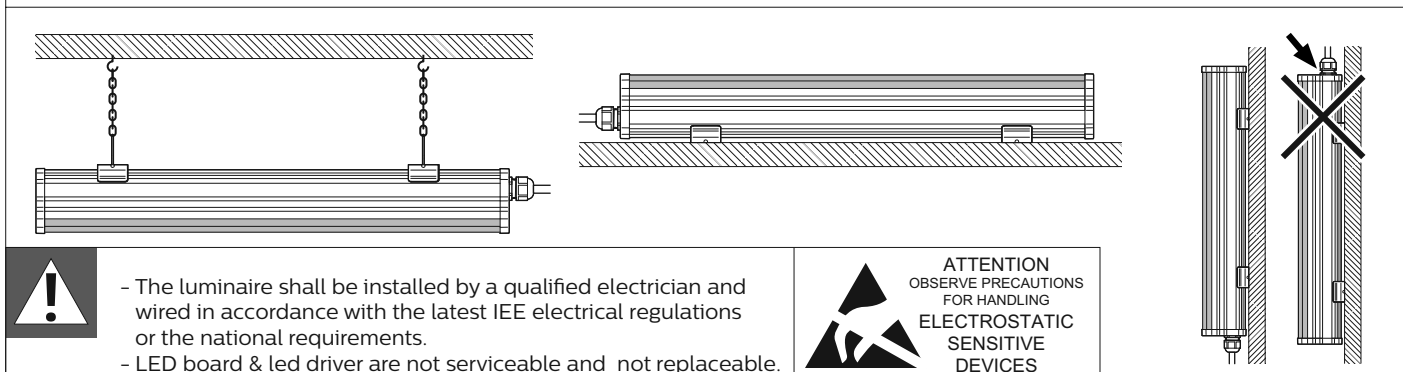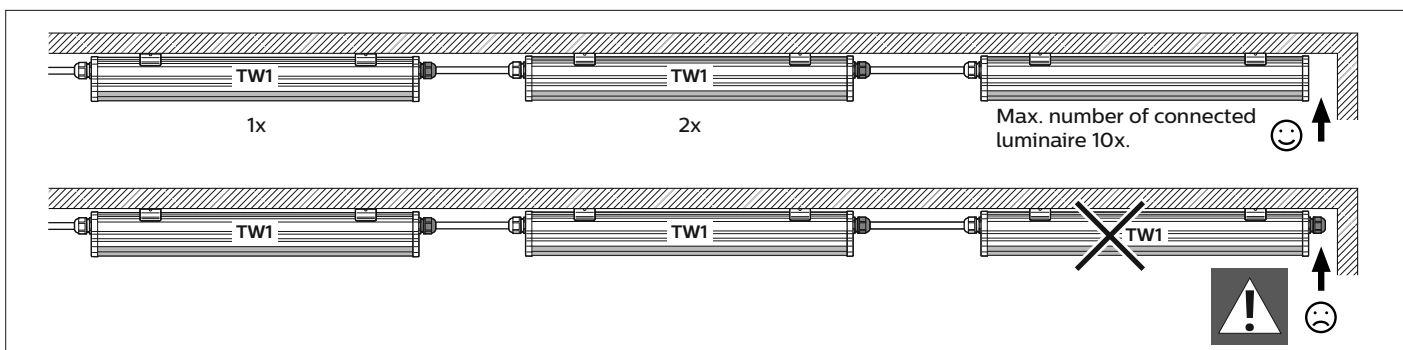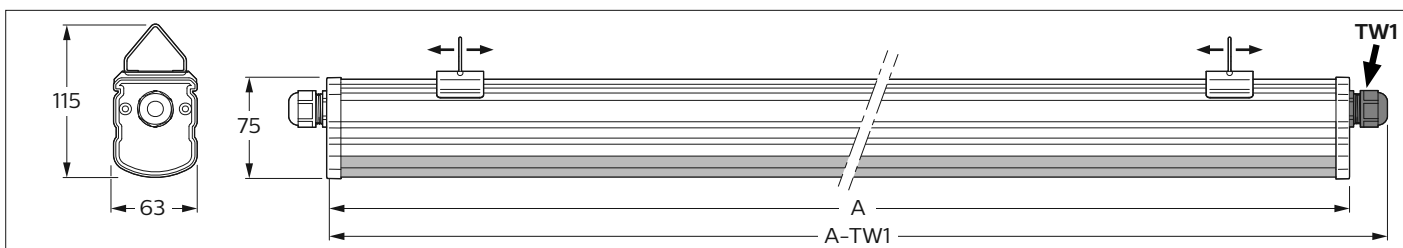

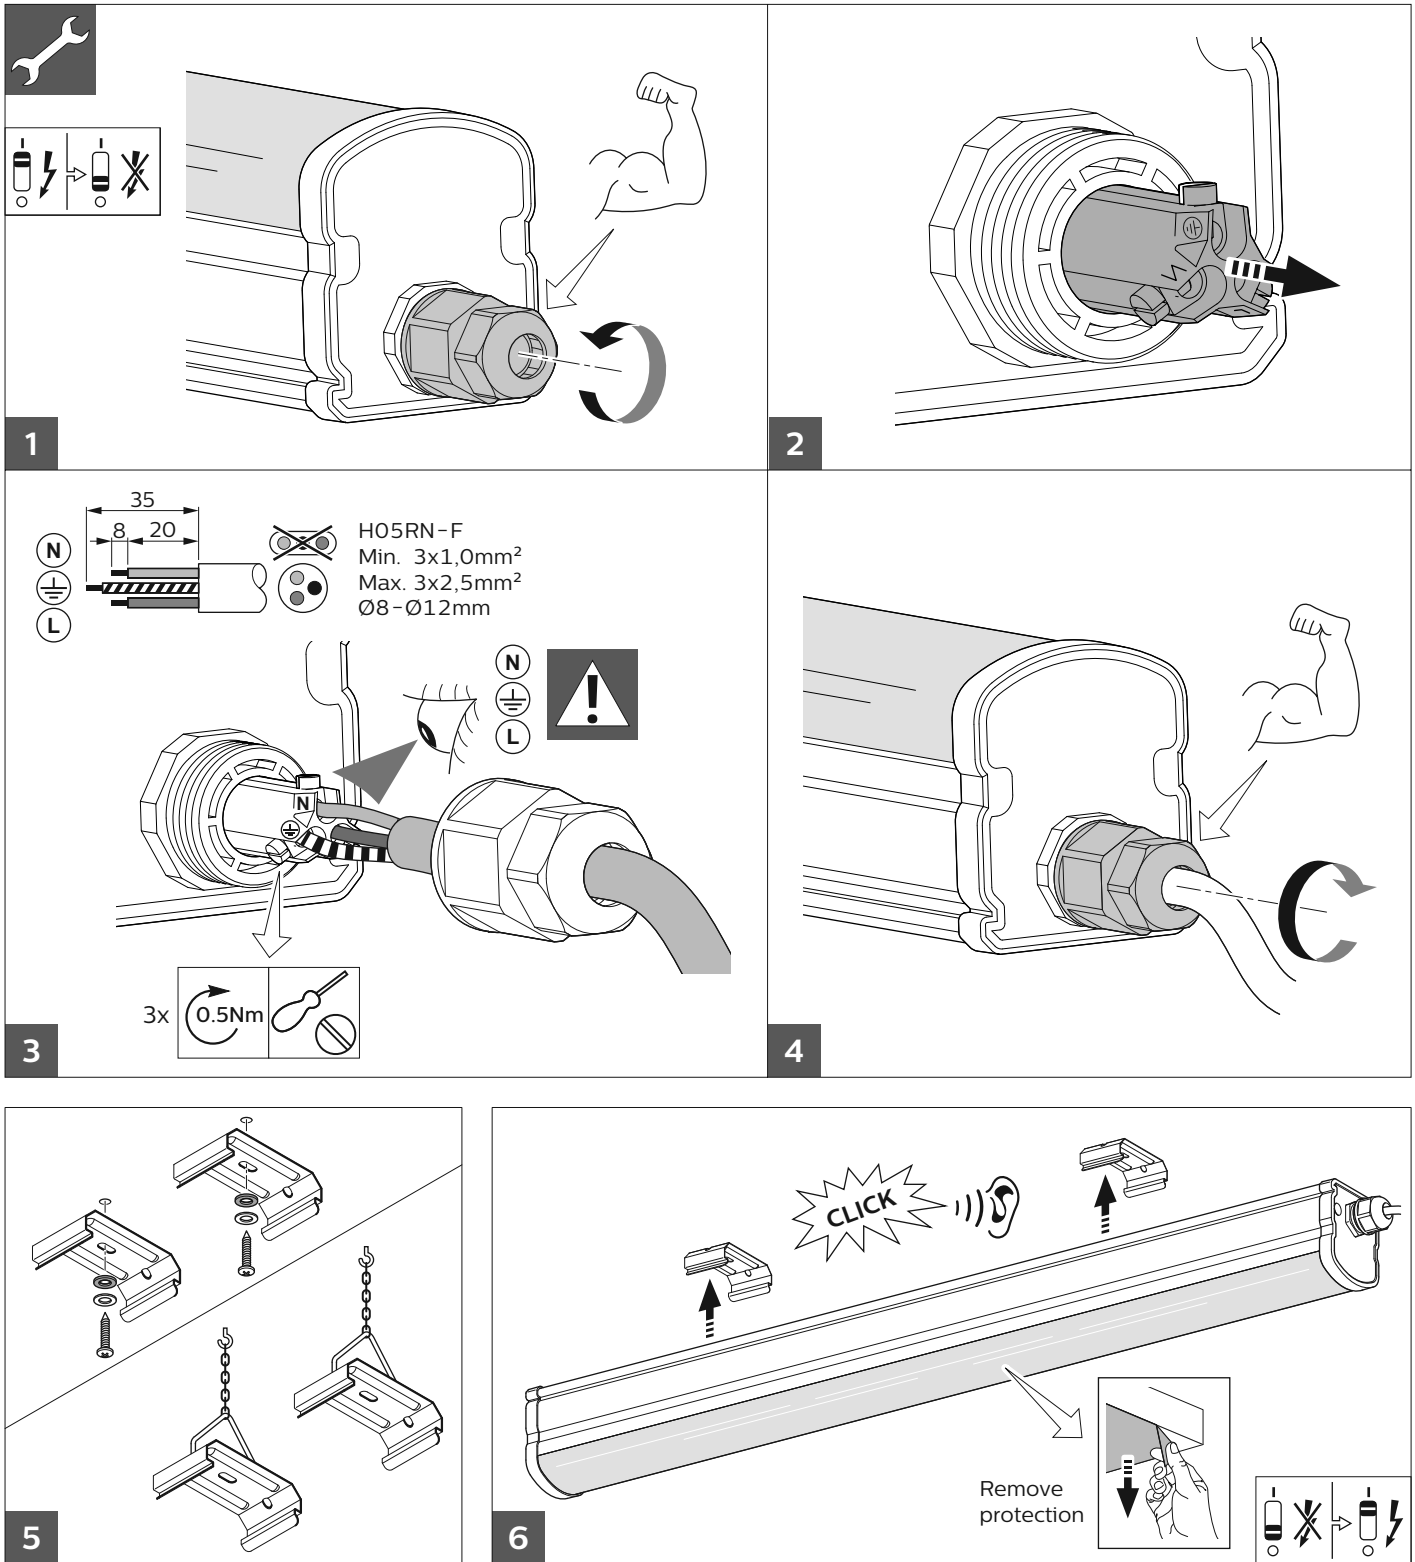

Inrush current

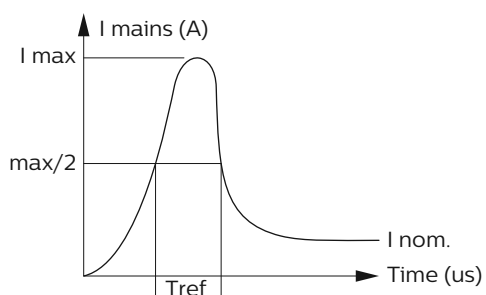

	LED18S	LED36S	LED56S
Electrical characteristics			
Inom (mA)	290	290	370
I max (A)	8	8	8
Tref (μs)	60	60	60
MCB	Luminaire Max.		
B-10 A	10	10	10
B-16 A	10	10	10
C-10 A	10	10	10
C-16 A	10	10	10