

by (Signify

## Exit/Emergency

Patron

Die-cast aluminum wall light/unit



Project:	
Location:	
Cat.No:	
Туре:	
Lamps:	Qty:
Notes:	

### **Example: PDNBZ**

PDNBZ         Nicad battery         6         Dark Bronze         6W halogen         WG4           PDRBZ         Remote unit         6         6         Dark Bronze         6W halogen         WG4	ories (order separately) Wire Guard
---	--

#### codes and standards

- ETL listed to standard UL924
- Wet/Damp location listed
- NFPA 101 (Life Safety Code)
- NFPA 70 (National Electric Code)
- Meets ADA specifications

#### construction

- Marine-grade die-cast aluminum housing with miro reflector to provide excellent photometrics.
- UV stable polycarbonate lens and neoprene gasket to protect from moisture and rain .
- Polyester powder coat for superior protection.
- · Available in dark bronze only.
- · Contact factory for custom colors.

#### installation

 Universal J-box pattern on back or rigid conduit entry on top of housing for mounting flexibility.

#### electronics

 The charger system includes low voltage disconnect to prevent deep discharge of battery. AC lockout to prevent battery drain prior to the energizing of utility power, and brownout protection which will automatically switch unit into emergency mode if the utility power sags below 80% of nominal. Solid-state, fully automatic charging circuit is protected with a moisture-resistant coating. All units are provided with self-diagnostics/self-test feature(Not available in remote units).

#### self-diagnostic/self-test

- This feature provides automatic testing and continuous monitoring of the unit and indicates any faults via a dual-color LED lamp. The low-profile test button with easily visible status indicator is located beneath the lens.
- This innovative circuitry monitors battery disconnection, charger failure, lamp failure and transformer fault every 5 seconds without discharging the battery or illuminating the lamps. It will automatically indicate lamp, battery, and charger status by dual-color LED lamp.
- The LED lamp indicator shows the following status :
  - Green ON: Unit is ready.
  - Blinking: Unit is self-testing.
  - · Red Service Alert (see fault indications)
- Fault Indications: (Red LED lamp indicator)
  One blink ON/pause 4 seconds: Battery not connected.

- Two blinks ON/pause 4 seconds : Battery is shorted or battery voltage drops below the accepted value .
- Three blinks ON/pause 4 seconds: Charger board circuit fault.
- $\bullet$  Four blinks ON/pause 4 seconds: Transformer fault .
- Five blinks ON/pause 4 seconds: Lamp fault.
- The unit will automatically initiate a self-test as follows:
- One minute self-test each month.
- $\cdot$  30 minute self-test on the 6th month following installation .
- $\cdot$  90 minute self-test on the 12th month following installation .
- Manual testing of the unit can be accomplished by pressing the test button as follows :
- Once 1 minute test
- Twice 2 minute test
- Three 30 minute test
- Four 90 minute test
- 120/277 VAC dual voltage input, selectable input.
- Power Consumption

• PDN	
120 Volts :	105.8 mA
277 Volts :	45.6 mA

#### lamps

• Nicad units have two 6V, 6W halogen bi-pin lamps.

#### battery

- 6V Maintenance free nickel cadmium battery.
- Battery has a service life of 7-9 years.
- Operating temperature range of 0 F (-18 C) to 131 F (55 C)\*
- Provides 90 minutes of emergency illumination .

#### warranty


· Five year warranty on units. (Lamps not included.)

#### remote unit

- Available with 2 6V 6W bi-pin halogen lamps.
- Available in dark bronze only.

\* Increases or decreases in temperature may affect battery performance. Optimum battery performance realized at 77°F (25°C).

## dimensions

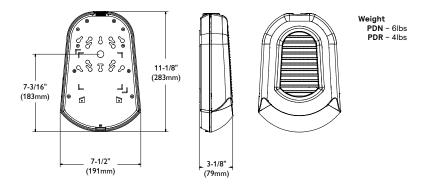

The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract.

# Signify

© 2019 Signify Holding. All rights reserved. This document contains information relating to the product portfolio of Signify which information may be subject to change. No representation or warranty as to the accuracy or completeness of the information included herein is given and any liability for any action in reliance thereon is disclaimed. All trademarks are owned by Signify Holding or their respective owners.

Signify North America Corporatio 200 Franklin Square Drive, Somerset, NJ 08873 Telephone 855-486-2216 Signify Canada Ltd. 281 Hillmount Road, Markham, ON, Canada L6C 2S: Telephone 800-668-9008