

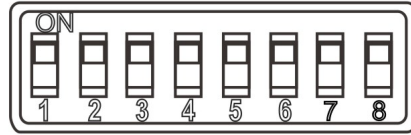



Configurable Parameters (Dip-switches)

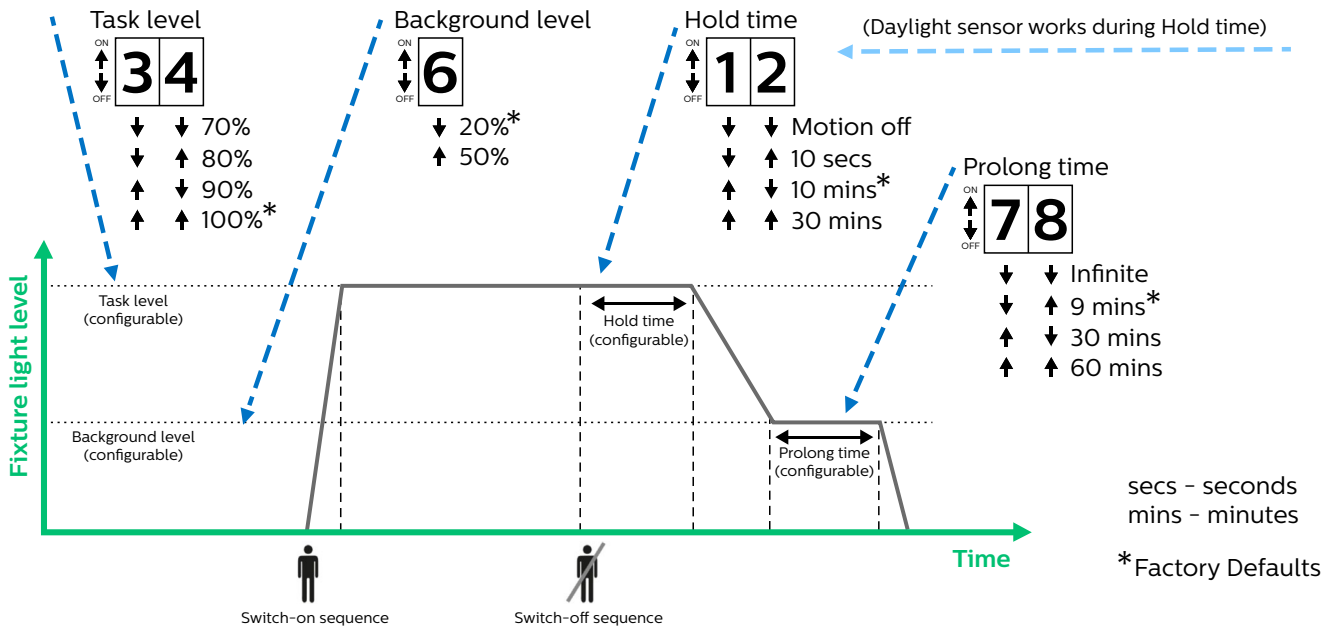


Daylight Harvesting



Daylight Calibration Routine

Step-by-step for the electrical mains on-off switching routine for daylight calibration in the field.
NOTE: The daylight calibration must be done when there is less or no sunlight in the area.

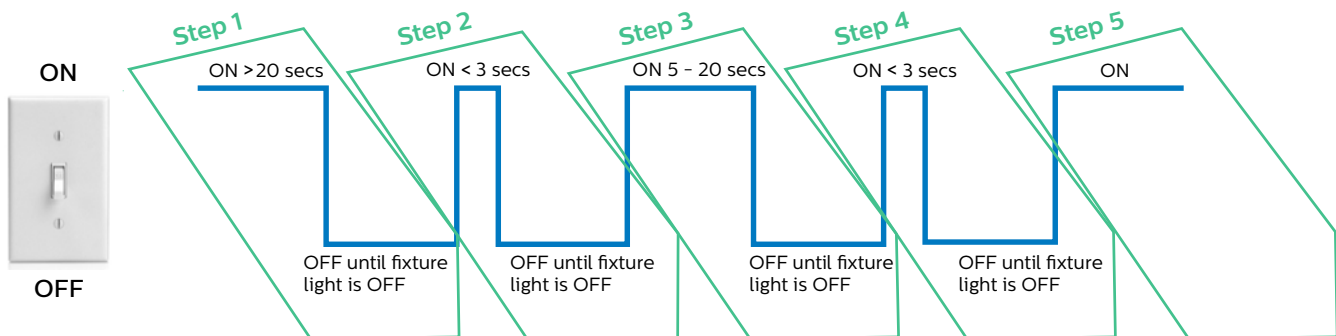

- Step 1 – Light ON for more than 20 seconds, Light OFF;
- Step 2 – Light ON for less than 3 seconds, Light OFF;
- Step 3 – Light ON for more than 5 seconds but less than 20 seconds, Light OFF;
- Step 4 – Light ON for less than 3 seconds, Light OFF;
- Step 5 – Light ON.

At the end (step 5) and after ~3 seconds, the fixture light will blink three times to confirm the successful calibration of daylight sensing.

NOTE: If this confirmation blinks are not received, please restart the calibration process starting from Step 1.