


Day-Brite CFI

by  Signify

Linear

SSR staggered strip

2', 3', 4', or 8', T8

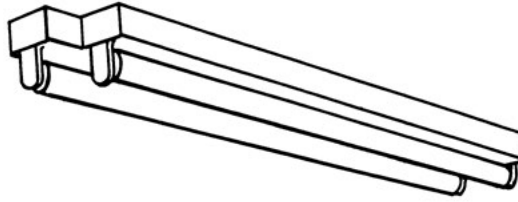

Project: _____
 Location: _____
 Cat.No: _____
 Type: _____
 Lamps: _____ Qty: _____
 Notes: _____

Day-Brite / CFI SSR staggered strip is designed for T8 lamps. It's industrial styling feature spring loaded turret-type lampholders.

Ordering guide

Example: SSR232UNV-1/2-EB

Family	No. of Lamps per Cross Section (not included)	Lamp Type	Voltage	Options
SSR	1	17 17WT8 (24")	UNV Universal voltage 120-277V 120 120V 277 277V 347 347V	1/1 One 1-lamp ballast
	2	25 25WT8 (36")		1/2 One 2-lamp ballast
TSSR		32 32WT8 (48")		1/4 One 4-lamp ballast
				EB Electronic ballast, <10% THD, std. ballast factor
				EB10R T8 electronic ballast, program rapid start, <10% THD
				EBHE T8 electronic ballast, high efficiency, std. ballast factor
				EBLHE T8 electronic ballast, high efficiency, low ballast factor
				EBHHE T8 electronic ballast, high efficiency, high ballast factor
				LT20 -20°F start option (use in conjunction with ballast option)
				E1 B100 emerg. ballast, 350-450 lumens, 120/277V
				E1CAN B100-CAN emerg. ballast, Canada market, 350-450 lumens, 120/347V
				E7 B60 emerg. ballast, 600-700 lumens, 120/277V
				E5 B50 emerg. ballast, U.S. or Canada market, 1100-1400 lumens, UNV
				E5CAN B50-CAN emerg. ballast, Canada market, 1100-1400 lumens, 120/347V
				E5ST B50ST emerg. ballast w/self test, U.S. or Canada market, 1100-1400 lumens, UNV
				GLR Fusing, fast blow

Accessories (order separately)

- CS-400 Rigid Canopy
- CS-500 42" Top Swivel Canopy
- CS-12 12" Stem
- CS-18 18" Stem
- CS-24 24" Stem
- CS-30 30" Stem
- CS-36 36" Stem
- CS-48 48" Stem
- SSR2AR-2 2 lamp steel asymmetric reflector, 2'
- SSR2AR-3 2 lamp steel asymmetric reflector, 3'
- SSR2AR-4 2 lamp steel asymmetric reflector, 4' (use 2 for 8')
- SSR2AS-2 2 lamp specular asymmetric reflector, 2'
- SSR2AS-3 2 lamp specular asymmetric reflector, 3'
- SSR2AS-4 2 lamp specular asymmetric reflector, 4' (use 2 for 8')
- SSR2DR-2 2 lamp steel directional reflector, 2'
- SSR2DR-3 2 lamp steel directional reflector, 3'
- SSR2DR-4 2 lamp steel directional reflector, 4' (use 2 for 8')
- SSR2DS-2 2 lamp specular directional reflector, 2'
- SSR2DS-3 2 lamp specular directional reflector, 3'
- SSR2DS-4 2 lamp specular directional reflector, 4' (use 2 for 8')

Power Connect modular wiring available, see sheet 1604-OA for details
 See Section 1600-OA for Option Information.
 See page 950-SS for Mounting Hardware.

Consult factory for 1-lamp reflector applications

SSR Staggered strip

2', 3', 4', or 8', T8


Construction/Finish

- Luminaires suitable for unit, row, surface, or suspension mounting.
- 3" lamp offset eliminates dark spots in row mounted applications.
- Multiple knockouts for convenient installation.
- Heavy duty channel of code gauge die formed steel.
- High reflectance white baked enamel finish.









Electrical

- cULus listed for damp locations.
- Self-contained fluorescent emergency power packs can be incorporated.
- Lampholders may be individually replaced or rewired.

Dimensions

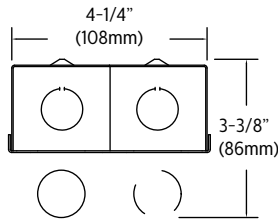

DIM	2-Lamp Cross-Section		1-Lamp Cross-Section	
		(mm)		(mm)
2' CHANNEL	27"	(686 mm)	24"	(610 mm)
3' CHANNEL	39"	(991 mm)	36"	(914 mm)
4' CHANNEL	51"	(1295 mm)	48"	(1219 mm)
8' CHANNEL/TANDEM	99"	(2515 mm)	93"	(2362 mm)

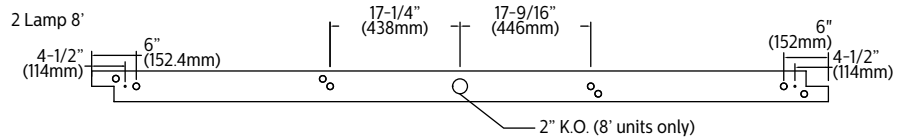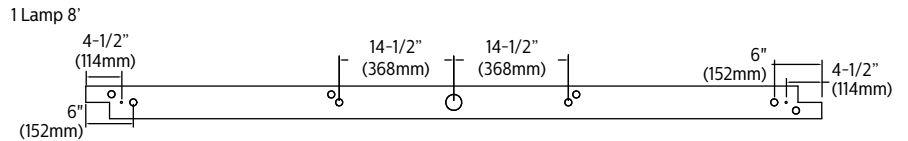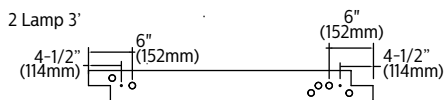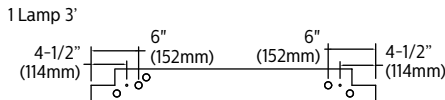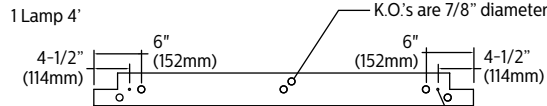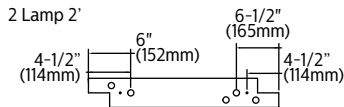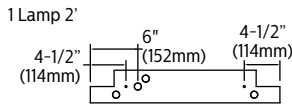


ROW CONFIGURATIONS

1 LAMP



2 LAMP




SSR Staggered strip


2', 3', 4', or 8', T8

Dimensions – reflectors



1 Lamp

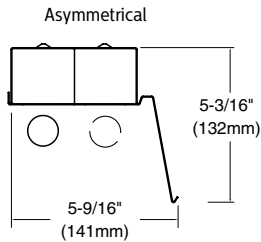

Lamp moves from side to side in continuous rows.

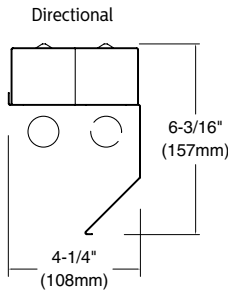

2 Lamp

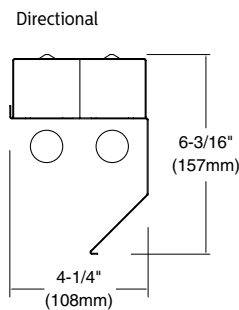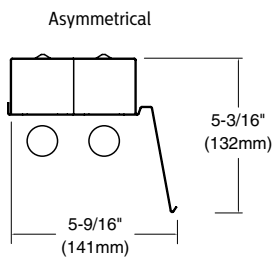

Catalog Numbers (Reflectors only)	
1 Lamp	
Asymmetrical	Directional
Steel	Steel
Application dependent, consult factory	
Silverado*	Silverado*
Application dependent, consult factory	
2 Lamp	
Asymmetrical	Directional
Steel	Steel
2' SSR2AR-2	2' SSR2DR-2
3' SSR2AR-3	3' SSR2DR-3
4' SSR2AR-4	4' SSR2DR-4
Silverado*	Silverado*
2' SSR2AS-2	2' SSR2DS-2
3' SSR2AS-3	3' SSR2DS-3
4' SSR2AS-4	4' SSR2DS-4

*Silverado reflectors are made from a high reflectance (95%) specular material. The specular finish provides more precise light control. Order strips separately.
Order two 4' reflectors for 8' strips.

Photometry

SSR Staggered Strip

Efficiency – 94.8%

LER – 80

Catalog No. SSR232-1/2-EB Test No. 28644 S/MH 1.5 Source F32T8 Lumens 4400 Input Watts 121 Comparative yearly lighting energy cost per 1000 lumens – \$3.00 based on 3000 hrs. and \$.08 pwr KWH. The photometric results were obtained in the Day-Brite laboratory which is NVLAP accredited by the National Institute of Standards and Technology. Photometric values based on test performed in compliance with LM-79.	Candlepower				Light Distribution																																																																																																																																										
	Angle	End	45	Cross	Degrees	Lumens	% Lamp	% Luminaire																																																																																																																																							
	0	1075	1075	1075	0-30	881	15.5	16.3																																																																																																																																							
	5	1078	1077	1070	0-40	1501	26.3	27.8																																																																																																																																							
	15	1045	1066	1077	0-60	2950	51.8	54.6																																																																																																																																							
	25	975	1038	1084	0-90	4619	81.0	85.5																																																																																																																																							
	35	872	994	1079	90-180	784	13.8	14.5																																																																																																																																							
	45	736	937	1055	0-180	5403	94.8	100.0																																																																																																																																							
	55	574	855	990	Coefficients of Utilization																																																																																																																																										
	65	396	737	904	EFFECTIVE FLOOR CAVITY REFLECTANCE 20 PER (pfc=0.20)																																																																																																																																										
75	217	603	737	<table border="1"> <thead> <tr> <th rowspan="2">pcc</th> <th colspan="3">80</th> <th colspan="3">70</th> <th colspan="3">50</th> </tr> <tr> <th>70</th> <th>50</th> <th>30</th> <th>70</th> <th>50</th> <th>30</th> <th>50</th> <th>30</th> </tr> </thead> <tbody> <tr> <td>pw</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>RCR</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>1</td> <td>96</td><td>91</td><td>85</td><td>93</td><td>88</td><td>82</td><td>81</td><td>77</td> </tr> <tr> <td>2</td> <td>86</td><td>77</td><td>69</td><td>82</td><td>73</td><td>67</td><td>68</td><td>63</td> </tr> <tr> <td>3</td> <td>78</td><td>67</td><td>57</td><td>73</td><td>64</td><td>56</td><td>58</td><td>53</td> </tr> <tr> <td>4</td> <td>70</td><td>57</td><td>48</td><td>68</td><td>56</td><td>47</td><td>52</td><td>45</td> </tr> <tr> <td>5</td> <td>65</td><td>52</td><td>41</td><td>61</td><td>50</td><td>40</td><td>46</td><td>39</td> </tr> <tr> <td>6</td> <td>59</td><td>46</td><td>36</td><td>56</td><td>44</td><td>35</td><td>40</td><td>34</td> </tr> <tr> <td>7</td> <td>55</td><td>41</td><td>33</td><td>53</td><td>40</td><td>32</td><td>36</td><td>29</td> </tr> <tr> <td>8</td> <td>51</td><td>38</td><td>28</td><td>48</td><td>35</td><td>28</td><td>34</td><td>27</td> </tr> <tr> <td>9</td> <td>47</td><td>34</td><td>26</td><td>46</td><td>33</td><td>26</td><td>30</td><td>23</td> </tr> <tr> <td>10</td> <td>45</td><td>32</td><td>23</td><td>42</td><td>30</td><td>23</td><td>28</td><td>22</td> </tr> </tbody> </table>								pcc	80			70			50			70	50	30	70	50	30	50	30	pw												RCR												1	96	91	85	93	88	82	81	77	2	86	77	69	82	73	67	68	63	3	78	67	57	73	64	56	58	53	4	70	57	48	68	56	47	52	45	5	65	52	41	61	50	40	46	39	6	59	46	36	56	44	35	40	34	7	55	41	33	53	40	32	36	29	8	51	38	28	48	35	28	34	27	9	47	34	26	46	33	26	30	23	10	45	32	23	42	30	23	28	22
pcc	80			70			50																																																																																																																																								
	70	50	30	70	50	30	50	30																																																																																																																																							
pw																																																																																																																																															
RCR																																																																																																																																															
1	96	91	85	93	88	82	81	77																																																																																																																																							
2	86	77	69	82	73	67	68	63																																																																																																																																							
3	78	67	57	73	64	56	58	53																																																																																																																																							
4	70	57	48	68	56	47	52	45																																																																																																																																							
5	65	52	41	61	50	40	46	39																																																																																																																																							
6	59	46	36	56	44	35	40	34																																																																																																																																							
7	55	41	33	53	40	32	36	29																																																																																																																																							
8	51	38	28	48	35	28	34	27																																																																																																																																							
9	47	34	26	46	33	26	30	23																																																																																																																																							
10	45	32	23	42	30	23	28	22																																																																																																																																							



Some luminaires use fluorescent or high intensity discharge (HID) lamps that contain small amounts of mercury. Such lamps are labeled, "Contain Mercury" and/or the symbol "HG". Lamps that contain mercury must be disposed of in accordance with local requirements. Information regarding lamp recycling and disposal can be found at www.lamprecycle.org

