

HADCO

by @signify

Urban

OB361

OB361 Bollard

Project:

Location:


Cat.No:

Type:

Lamps:

Qty:

Notes:

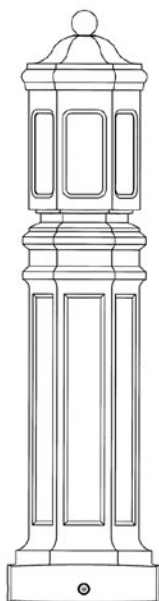

Ordering Guide

Example: OB361 A TL 100I E

Product Code	OB361	
Finish	A	Black
	B	White
	G	Verde
	H	Bronze
	J	Green
Optics	TL	Clear Louvers
	B5	Type V Refractive Panels
	L0	Opal Panels
Wattage	100I	100W INC
	26F	26W CFL
	32F	32W CFL
	42F	42W CFL
	50H	50W MH
	70H	70W MH
	100H	100W MH
	70S	70W HPS
	100S	100W HPS
Voltage	E	120V
	F	208V
	G	240V
	H	277V
	K	347V
	A	120-277 VAC

*1 Available in 120V (E) only.

*2 Available in Warm CCT (W) only.

*3 Available in Cone Optics (KF) only.

*4 Available in 120-270V (A) only.

Specifications

HOUSING:

356 HM high-strength, low-copper, proprietary cast aluminum alloy . Cast aluminum alloy base with 0.250" minimum wall thickness. Easy access to lamp. A weatherproof ballast assembly isolates the ballast from water and heat for longer life. All non-ferrous fasteners prevent corrosion and ensure longer life.

FINISH:

Thermoset polyester powdercoat is electrostatically applied after a five-stage conversion cleaning process and bonded by heat fusion thermosetting. Laboratory tested for superior weatherability and fade resistance in accordance with ASTM B117 specifications. For larger projects where a custom color is required, contact the factory for more information.

OPTICAL ASSEMBLY:

Type V Refractive Panels. Optically designed, U.V. stabilized, injection molded, acrylic refractive panels. Symmetric. U.V. stabilized opal acrylic panels. Optically designed, highly polished ALZAK® aluminum, internal louver assembly. U.V. stabilized, injection molded, clear acrylic panels.

LAMPING:

Incandescent Medium Base A19. 42W CFL (GX24Q-4). 26W CFL (GX24Q-3). 32W CFL (GX24Q-3). MH and HPS Medium base: E17.

ELECTRICAL ASSEMBLY:

4kv rated porcelain medium base. Nickel-plated screw shell with center contact. Key-slotted Ballast Assembly is mounted to an aluminum plate, which is mounted inside the base. Quick disconnects for easy installation and removal.

OB361 OB361

Bollard

Specifications

BALLAST:

All HID ballasts are core and coil and regulated with power factors better than 90% (HPF). Ballast provides +/- 5% lamp power regulation with +/- 10% input voltage regulation. Ballasts are factory pre-wired and tested. Metal halide ballasts are capable of starting at -20° F or -30° C and HPS at -40°F or -40°C. NOTE: All ballasts are EISA / Title 20 / Title 24 compliant where applicable.

INSTALLATION & MOUNTING:

Internal cast aluminum base plate is secured to anchor foundation by four (4) ½" x 15" galvanized steel bolts and nuts on a 6"-8", or 9 ¾" bolt circle. (Use factory supplied template.). Bollard housing is mounted directly to the plate with four (4) 5/16-18 stainless steel set screws. Base of bollard can be leveled with over and under nut.

CERTIFICATIONS:

ETL Listed to U.S. safety standards for wet locations. cETL listed to Canadian safety standards for wet locations. Manufactured to ISO 9001:2008 Standards.

WARRANTY:

Three-year limited warranty.

Height :

40 1/4" (102cm)

Width:

10 3/8" (26cm)

Bolt Circle:

6"-8" (15cm-20cm) or 9 3/4" (25cm)

Anchor Rods:

Internal. (4) 1/2" dia. x 15" long (1.3cm x 38 cm)

Base Dimensions:

8 3/4" x 10 3/8" (22.2cm x 26.4cm)

Max. Weight:

40 lbs

