


Project: _____
 Location: _____
 Cat.No: _____
 Type: _____
 Lamps: _____ Qty: _____
 Notes: _____

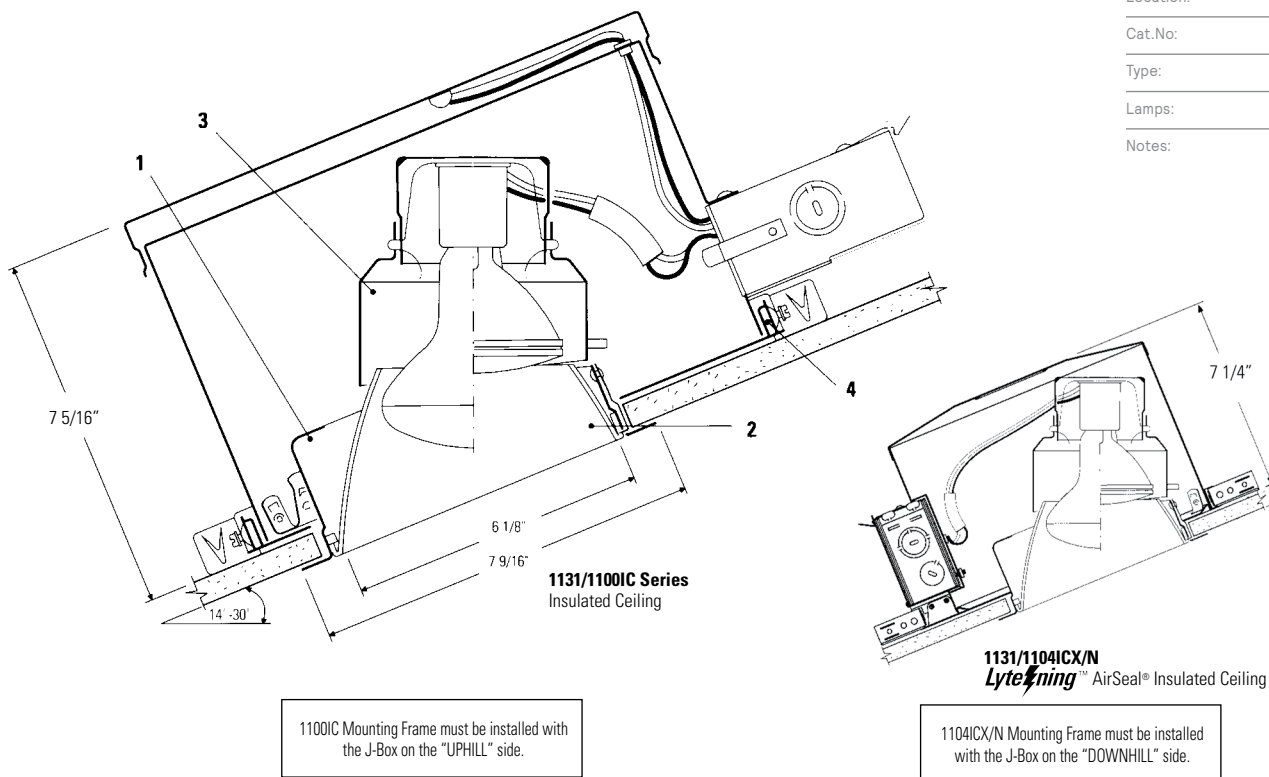

Complete Fixture consists of Reflector Trim & Frame-In Kit. Select each separately.

Reflector Trim	Frame-In Kit — See Individual Frame-In Kit Specification Sheets			
	Incandescent			
	Frame-In Kit	Installation Type	Lamping	Height
1131WH White Step Baffle	1100IC	IC	75W PAR30 (Short Neck)	7 5/16"
	1100AICM	AirSeal® IC	65W BR30	7 5/16"
	1104ICX/N	AirSeal® IC	75W PAR30 (Short Neck) 85W BR30	7 1/4"

Features

- Housing:** Hydroformed aluminum, .040" thick; white trim flange.
- Aperture:** Conical aluminum step baffle, matte black or gloss white finish; or hydroformed aluminum cone, specular finish. For ceiling slopes 14° - 30° angle, 3/12 - 7/12 pitch.
- Lamp Housing:** Hydroformed aluminum, .040" thick; permits ± 7° vertical adjustment for straight downlighting.
- Frame-In Kit:** See Frame-In Kit specification sheets for more details.

Options & Accessories

Extra Wide Flange Trim Ring: 1954 - 8 5/8" O.D.

Labels

UL (Suitable for Damp Locations), I.B.E.W.

1131 Lytecaster Reflector 6 3/4"

Shallow Slope Ceiling Trim



Footcandles 2 1/2' Above the Floor

Fixture mounted on 5' x 5' centers (horizontally) in 15' x 30' room with sloped ceiling.

Room reflectances: 80% ceiling, 50% walls, 20% floor.


A = 75W PAR30 FL (Flood)

B = 75W PAR30 NFL (Narrow Flood)

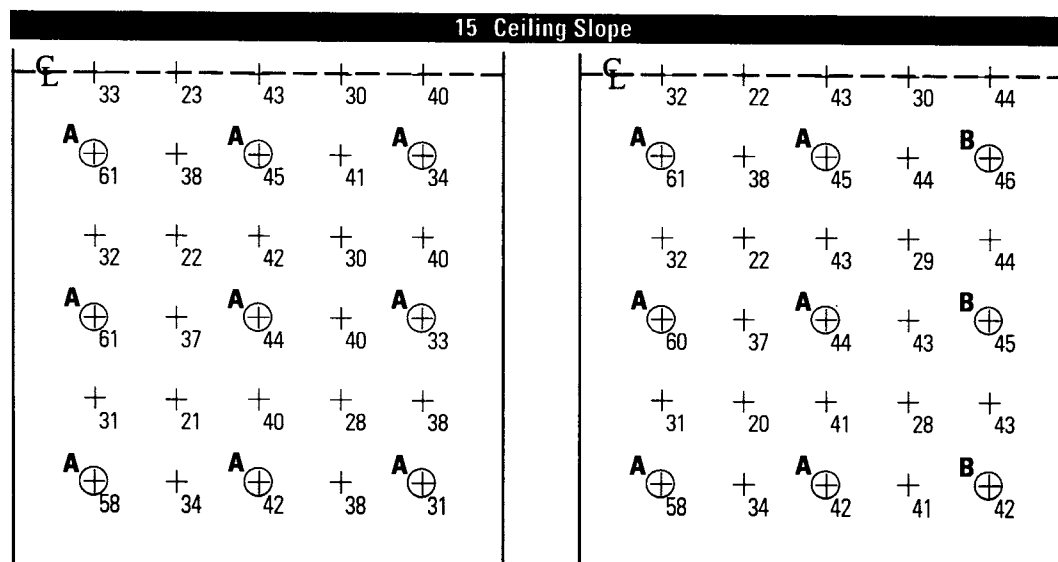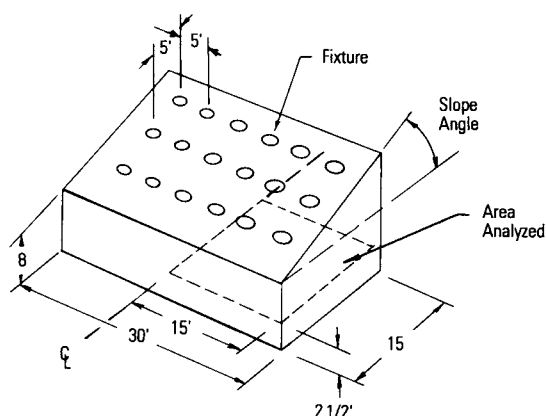

1131 Lytecaster Reflector 6 3/4"

Shallow Slope Ceiling Trim

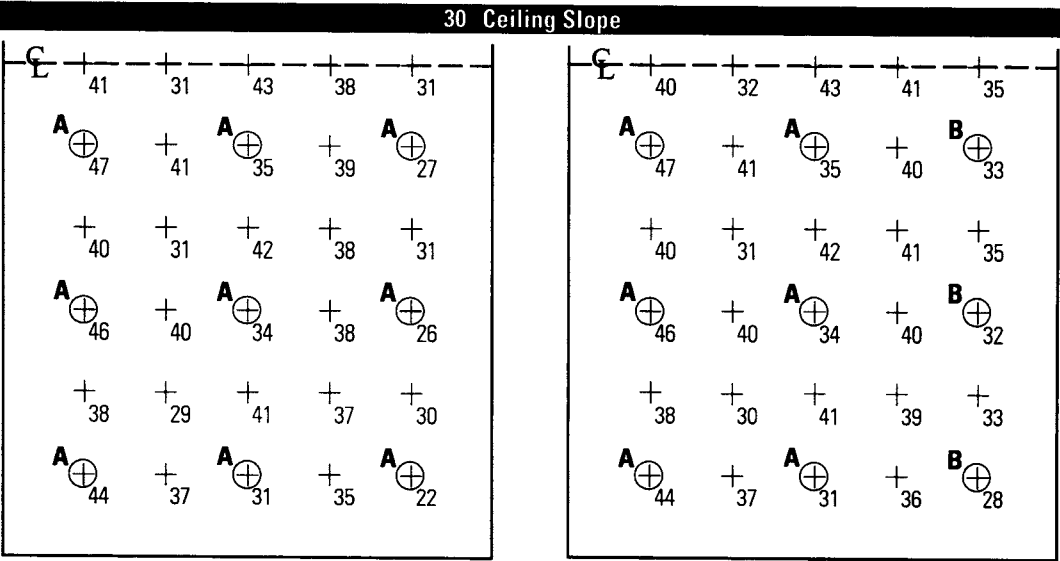

Data calculated with GENESYS using bare lamp photometrics. Fixture spacing exceeding 5' may cause uneven lighting under lowest ceiling areas.
To convert lighting data for a lower wattage incandescent lamp of the **same type**, multiply the footcandle (or candlepower) values by the ratio of the lumens of the two lamps. The coefficients of utilization remain the same.

