


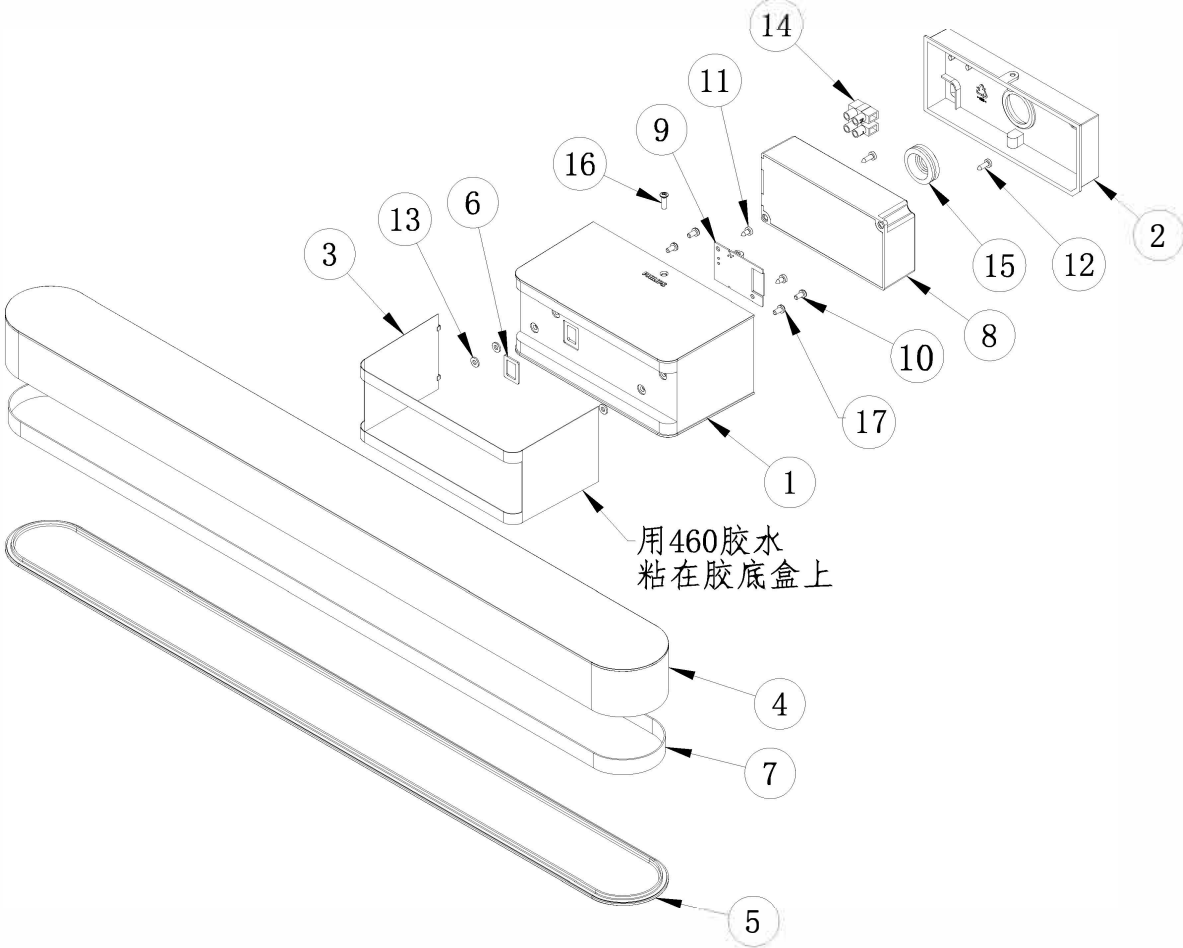

Warnings
Always make sure the luminaire is detached from the mains socket
Always make sure the DC cable is detached from the power supply
Staring at the operating light source may cause eye injury

#	COMPONENT	QTY
1	Base	1
2	Plastic sealed housing	1
3	Deco plate	1
4	Deco ring	1
5	Reflector	2
6	Washer	1
7	LED strip	1
8	Driver	1
9	Hue Connect	1
10	Screw	2
11	Screw	2
12	Screw	2
13	φ3.2 washer	4
14	Terminal block	1
15	Water proof plug	1
16	Screw	2
17	Screw	2

#	Disassemble/dismantle steps	Tools needed
a	Unscrew 2 screws[16] and remove Plastic sealed housing[2] from base[1]	screwdriver
b	Unplug terminal block[14] and Water proof plug[15] from Plastic sealed housing[2]	
c	Unscrew 2 screws[12] from base[1]	screwdriver
d	Unscrew 2 screws[11] from base[1]	screwdriver
e	Unplug cable from hue connect[9]	
f	Unplug driver[8] cable from hue connect[9]	
g	Remove driver[8] and hue connect[9] from base[1]	
h	Breaking Reflector[5] and remove LED strip[7] from Deco ring[4].The electrical components are not allowed to be damaged.	

* FOR LIGHT SOURCE-LED STRIP REMOVAL PLEASE SEE DOCUMENT
442295215544_L2 Removal and Test Instuction Flex LED Strip

STATUS	DESCRIPTION 929003056001 Adore Hue wall lamp chrome 1x33.5W 24V	DESIGN ID	2021-09-02
		DOC 12NC	
NAME Li Ba	LOCAL PART ID		A3-L
CHECKED	DATE 2021-09-02		