

# PHILIPS

CoreLine

All-in



New: Philips CoreLine All-in


# All you need for maximum installation flexibility

Our latest addition to the Philips CoreLine family, the CoreLine All-in luminaires, integrate up to 9 codes in a single luminaire by combining 3 color temperatures and 3 lumen outputs. Enjoy unparalleled flexibility on-site at the flip of a switch and the ease-of-use you know you can expect from Philips CoreLine.

All this makes them the perfect solution for any job – from new installations to maintenance work.

## Here's how it works

- The lumen output and/or color temperature can be adjusted via an integrated switch.\*
- Multi ColorTemperature: 3000K/3500K/4000K\*
- Multi Lumen: 2,300 – 10,000 lm\*

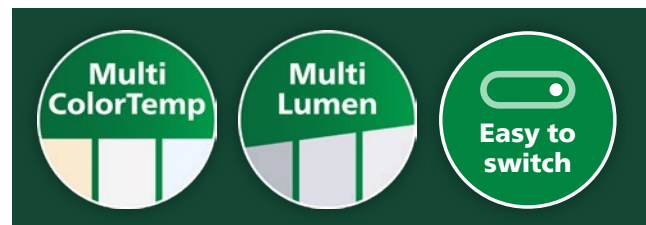

## Your benefits



### No more tough decisions

Reduced risk to pick the wrong luminaire. Just change the setting on location to fit the requirements.



### Perfect for maintenance

Pick the right setting on-site while changing luminaires or adjust after installation to the clients' preferences.



### Easy to install

Enjoy the same quick and easy installation you know and appreciate from the CoreLine range.



### Trusted Philips quality

All-in luminaires fulfill our highest standards to give you peace of mind. And happy customers.



Local subsidies can further enhance the appeal of energy efficient lighting for your customers. [Learn how to use this benefit for your business on philips.com/ledconversion](https://philips.com/ledconversion)

\* Depending on product.

a lighting brand by  Signify

# Easy installation included

- Less maintenance thanks to high-quality products with lifetimes of up to 100,000 hours (L80)
- Easy to install luminaires designed to make your life easier
- 5 years warranty\*
- Up to 145 lm/W efficacy for maximum energy cost savings




## CoreLine batten All-in. 3-in-1 product codes.



Product type	Lumen output	Color temp.	EOC code	12NC
	lm	K		
BN126C LED25-41-64S/840 PSU L1200	2500/4100/6400	4000	50051899	911401816685
BN126C LED35-52-80S/840 PSU L1500	3500/5200/8000	4000	50053299	911401816685

## CoreLine panel All-in. Up to 9-in-1 product codes.

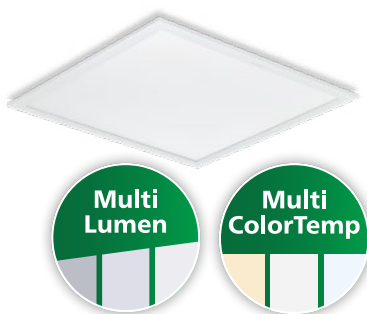

Product type	Lumen output	Color temp.	EOC code	12NC
	lm	K		
RC132V G5 29_36_43S/830_40 PSU W60L60 OC	2900/3100/3400/3600/4000/4300	3000/3500/4000	176800000	911401822185
RC133V G5 29_43S/830_35_40 PSU W62L62 OC	2900/3100/3400/3600/4000/4300	3000/3500/4000	180500000	911401822585
RC133V G5 29_43S/830_35_40 PSD W62L62 OC	2900/3100/3400/3600/4000/4300	3000/3500/4000	181200000	911401822685
RC132V 31_36_43S/840 PSU W60L60 OC UKI	3100/3600/4300	4000	183699000	911401822885
RC132V G5 29_34_40S/830 PSU W60L60 OC	2900/3400/4000	3000	95030600	911401843684
RC132V G5 31_36_43S/840 PSU W60L60 OC	3100/3600/4300	4000	95031300	911401843784
RC133V G5 29_34_40S/830 PSU W62L62 OC	2900/3400/4000	3000	95032000	911401843884
RC133V G5 31_36_43S/840 PSU W62L62 OC	3100/3600/4300	4000	95033700	911401843984
RC133V G5 31_36_43S/865 PSU W62L62 OC	3100/3600/4300	6500	95034400	911401844084
RC132V G5 31_36_43S/840 PSU W60L60 NOC	3100/3600/4300	4000	95035100	911401844184
RC132V G5 29_34_40S/830 PSD W60L60 OC	2900/3400/4000	3000	95036800	911401844284
RC132V G5 31_36_43S/840 PSD W60L60 OC	3100/3600/4300	4000	95037500	911401844384
RC133V G5 29_34_40S/830 PSD W62L62 OC	2900/3400/4000	3000	95038200	911401844484
RC133V G5 31_36_43S/840 PSD W62L62 OC	3100/3600/4300	4000	95039900	911401844584
RC132V G5 31_36_43S/940 PSD W30L120 OC	3100/3600/4300	4000	95040500	911401844684

\*For warranty conditions, visit [www.lighting.philips.com/main/support/support/warranty](http://www.lighting.philips.com/main/support/support/warranty)

## CoreLine recessed All-in. 3-in-1 product codes.



Product type	Lumen output	Color temp.	EOC code	12NC
	lm	K		
RC136B 28S_34S_40S/830 PSU W60L60 NOC	2800/3400/4000	3000	51216000	911401880281
RC136B 31S_37S_43S/840 PSU W60L60 NOC	3100/3700/4300	4000	51217700	911401880381
RC136B 31S_37S_43S/840 PSU W60L60 OC	3100/3700/4300	4000	51218400	911401880481
RC136B 31S_37S_43S/840 PSD W60L60 NOC	3100/3700/4300	4000	51219100	911401880581
RC136B 28S_34S_40S/830 PSD W60L60 OC	2800/3400/4000	3000	51220700	911401880681
RC136B 31S_37S_43S/840 PSD W60L60 OC	3100/3700/4300	4000	51221400	911401880781
RC136B 28S_34S_40S/830 PSD W30L120 OC	2800/3400/4000	3000	51222100	911401880881
RC136B 31S_37S_43S/840 PSD W30L120 OC	3100/3700/4300	4000	51223800	911401880981
RC136B 28S_34S_40S/830 PSU W60L60 NOC W3	2800/3400/4000	3000	51224500	911401881081
RC136B 31S_37S_43S/840 PSU W60L60 NOC W3	3100/3700/4300	4000	51225200	911401881181
RC136B 31S_37S_43S/840 PSU W60L60 OC W3	3100/3700/4300	4000	51226900	911401881281
RC136B 31S_37S_43S/840 PSD W60L60 NOC W5	3100/3700/4300	4000	51227600	911401881381
RC136B 28S_34S_40S/830 PSD W60L60 OC W5	2800/3400/4000	3000	51228300	911401881481
RC136B 31S_37S_43S/840 PSD W60L60 OC W5	3100/3700/4300	4000	51229000	911401881581

## CoreLine surface-mounted All-in. 3-in-1 product codes.



Product type	Lumen output	Color temp.	EOC code	12NC
	lm	K		
SM136V 28S_34S_40S/830 PSU W20L120 NOC	2800/3400/4000	3000	51230600	911401881681
SM136V 31S_37S_43S/840 PSU W20L120 NOC	3100/3700/4300	4000	51231300	911401881781
SM136V 31S_37S_43S/840 PSU W20L120 OC	3100/3700/4300	4000	51232000	911401881881
SM136V 31S_37S_43S/840 PSD W20L120 NOC	3100/3700/4300	4000	51233700	911401881981
SM136V 28S_34S_40S/830 PSD W20L120 OC	2800/3400/4000	3000	51234400	911401882081
SM136V 31S_37S_43S/840 PSD W20L120 OC	3100/3700/4300	4000	51235100	911401882181
SM136V 28S_34S_40S/830 PSU W20L150 NOC	2800/3400/4000	3000	51236800	911401882281
SM136V 31S_37S_43S/840 PSU W20L150 NOC	3100/3700/4300	4000	51237500	911401882381
SM136V 31S_37S_43S/840 PSU W20L150 OC	3100/3700/4300	4000	51238200	911401882481
SM136V 28S_34S_40S/830 PSD W20L150 OC	2800/3400/4000	3000	51239900	911401882581
SM136V 31S_37S_43S/840 PSD W20L150 OC	3100/3700/4300	4000	51240500	911401882681

## CoreLine wall-mounted All-in. 6-in-1 product codes.



Product type	Lumen output	Color temp.	EOC code	12NC
	lm	K		
WL140V LED12_20S/827_830_840 PSU WH	1200/2000	2700/3000/4000	52879699	911401848182
WL140V LED20_34S/827_830_840 PSU WH	2000/3300	2700/3000/4000	52880299	911401848282

## CoreLine waterproof All-in. 2-in-1 product codes.



Product type	Lumen output	Color temp.	EOC code	12NC
	lm	K		
WT120C G2 LED27_45S/840 PSU L1200	2700/4500	4000	50019899	911401814985
WT120C G2 LED37_60S/840 PSU L1500	3700/6000	4000	50020499	911401815085



Innovative



Easy-to-install



High quality

© 2023 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.



Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. All other trademarks are owned by Signify Holding or their respective owners.

All technical information can be found at [www.philips.com](http://www.philips.com)