



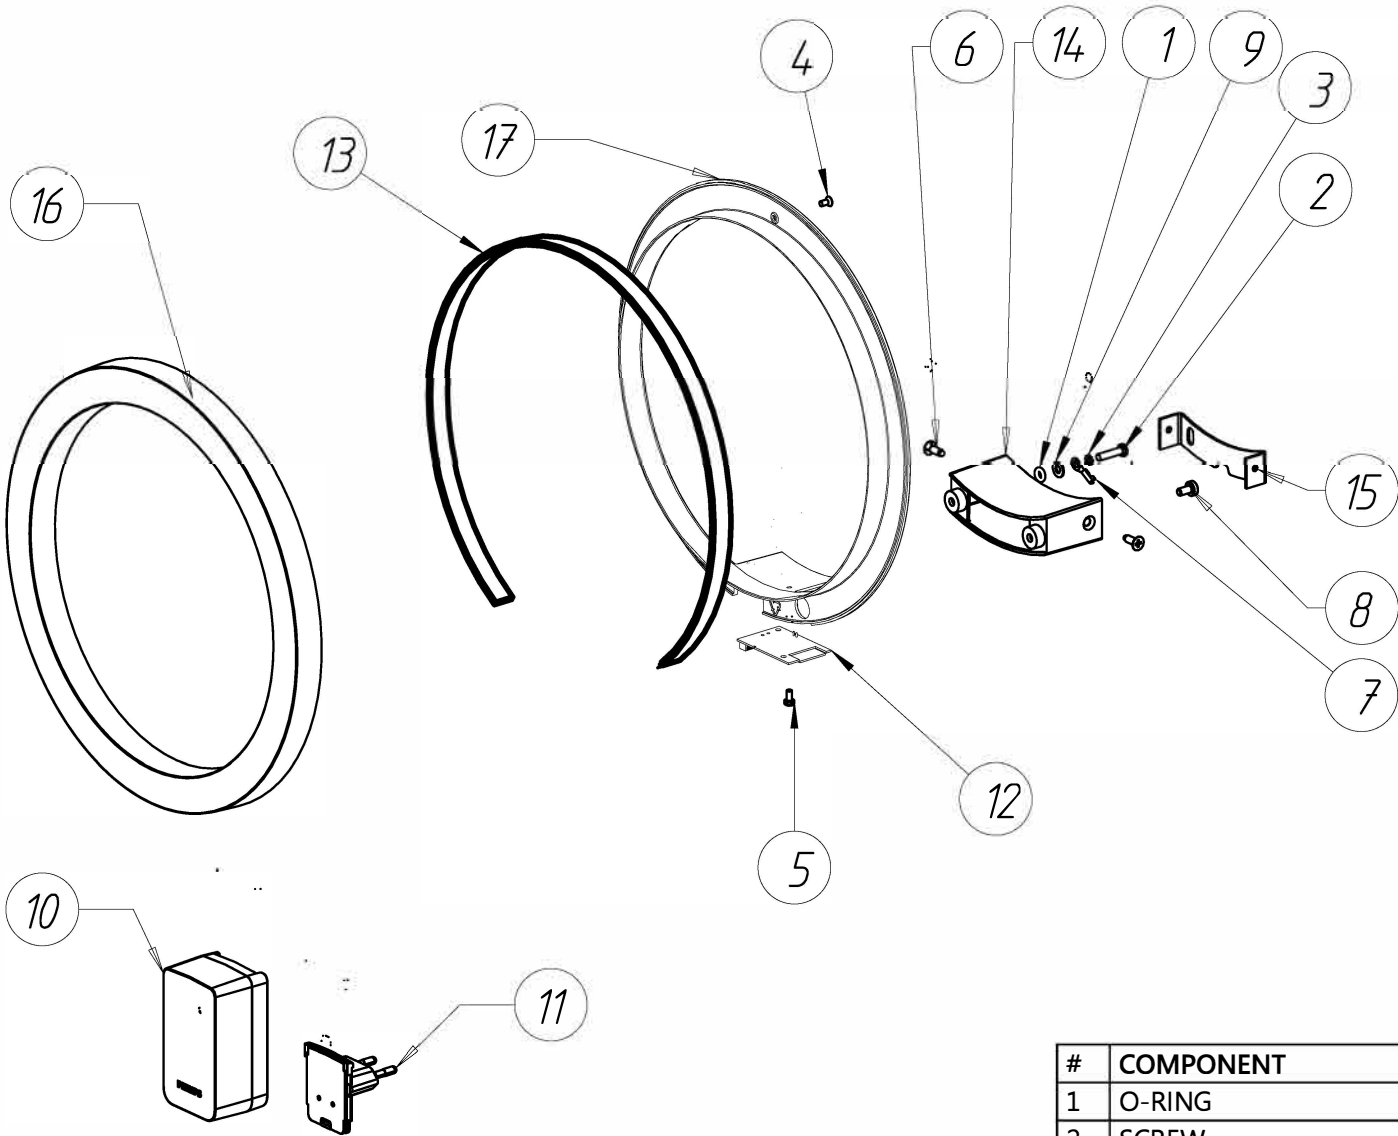

**Warnings**  
Always make sure the luminaire is detached from the mains socket  
Always make sure the DC cable is detached from the power supply  
Staring at the operating light source may cause eye injury

| # | Disassemble/dismantle steps                                    | Tools needed                                                   |
|---|----------------------------------------------------------------|----------------------------------------------------------------|
| a | Remove braket (15) by removing screws (6)                      | CROSSHEAD SCREWDRIVER PZ                                       |
| b | Remove base (14) by unscrewing screws (2) and (8)              | TORXHEAD SCREW DRIVER T10 and CROSSHEAD SCREWDRIVER PZ         |
| c | Remove screw (5)                                               | TORXHEAD SCREW DRIVER T10                                      |
| d | Remove low voltage wires of the LIGHT SOURCE - LED STRIP (13)  | -                                                              |
| e | Remove low voltage wires from LIGHT SOURCE - HUE CONNECT (12). | FLATHEAD SCREWDRIVER OR WAGO TOOL #2065                        |
| f | Remove the diffuser by unscrewing screw (4)                    | CROSSHEAD SCREWDRIVER PZ                                       |
| g | Remove LIGHT SOURCE - LED STRIP                                | See document: 200604 - Instruction LED Strip Removal Procedure |

- A specific Wago tool #2065 can be ordered separately for wire insertion and release tool:

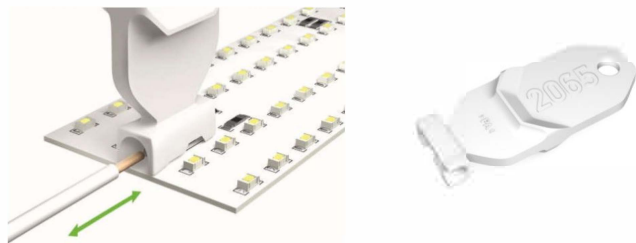

| #  | COMPONENT                  | QTY |
|----|----------------------------|-----|
| 1  | O-RING                     | 1   |
| 2  | SCREW                      | 1   |
| 3  | TOOTHED WASHER             | 1   |
| 4  | SCREW                      | 1   |
| 5  | SCREW                      | 1   |
| 6  | SCREW                      | 2   |
| 7  | RING TERMINAL              | 1   |
| 8  | SCREW                      | 1   |
| 9  | WASHER                     | 1   |
| 10 | CONTROL GEAR - PSU         | 1   |
| 11 | PLUG                       | 1   |
| 12 | LIGHT SOURCE - HUE CONNECT | 1   |
| 13 | LIGHT SOURCE - LED STRIP   | 1   |
| 14 | BASE                       | 1   |
| 15 | BRACKET                    | 1   |
| 16 | COVER                      | 1   |
| 17 | DIFFUSER                   | 1   |

| SKU          | Color | Country |
|--------------|-------|---------|
| 929003053001 | White | EU      |
| 929003053101 | Black | EU      |

|        |         |                                               |  |            |           |  |    |            |
|--------|---------|-----------------------------------------------|--|------------|-----------|--|----|------------|
| STATUS |         | DESCRIPTION                                   |  |            | DESIGN ID |  | 01 | 2021-06-25 |
|        |         |                                               |  |            | DOC 12NC  |  |    |            |
|        |         | SANA Hue wall 20W 24V Disassembly instruction |  |            |           |  |    |            |
| NAME   | He Go   | LOCAL PART ID                                 |  | SH.        | 3         |  |    | A3-L       |
|        | CHECKED | DATE                                          |  | 2021-06-25 |           |  |    |            |

