

PHILIPS
hue

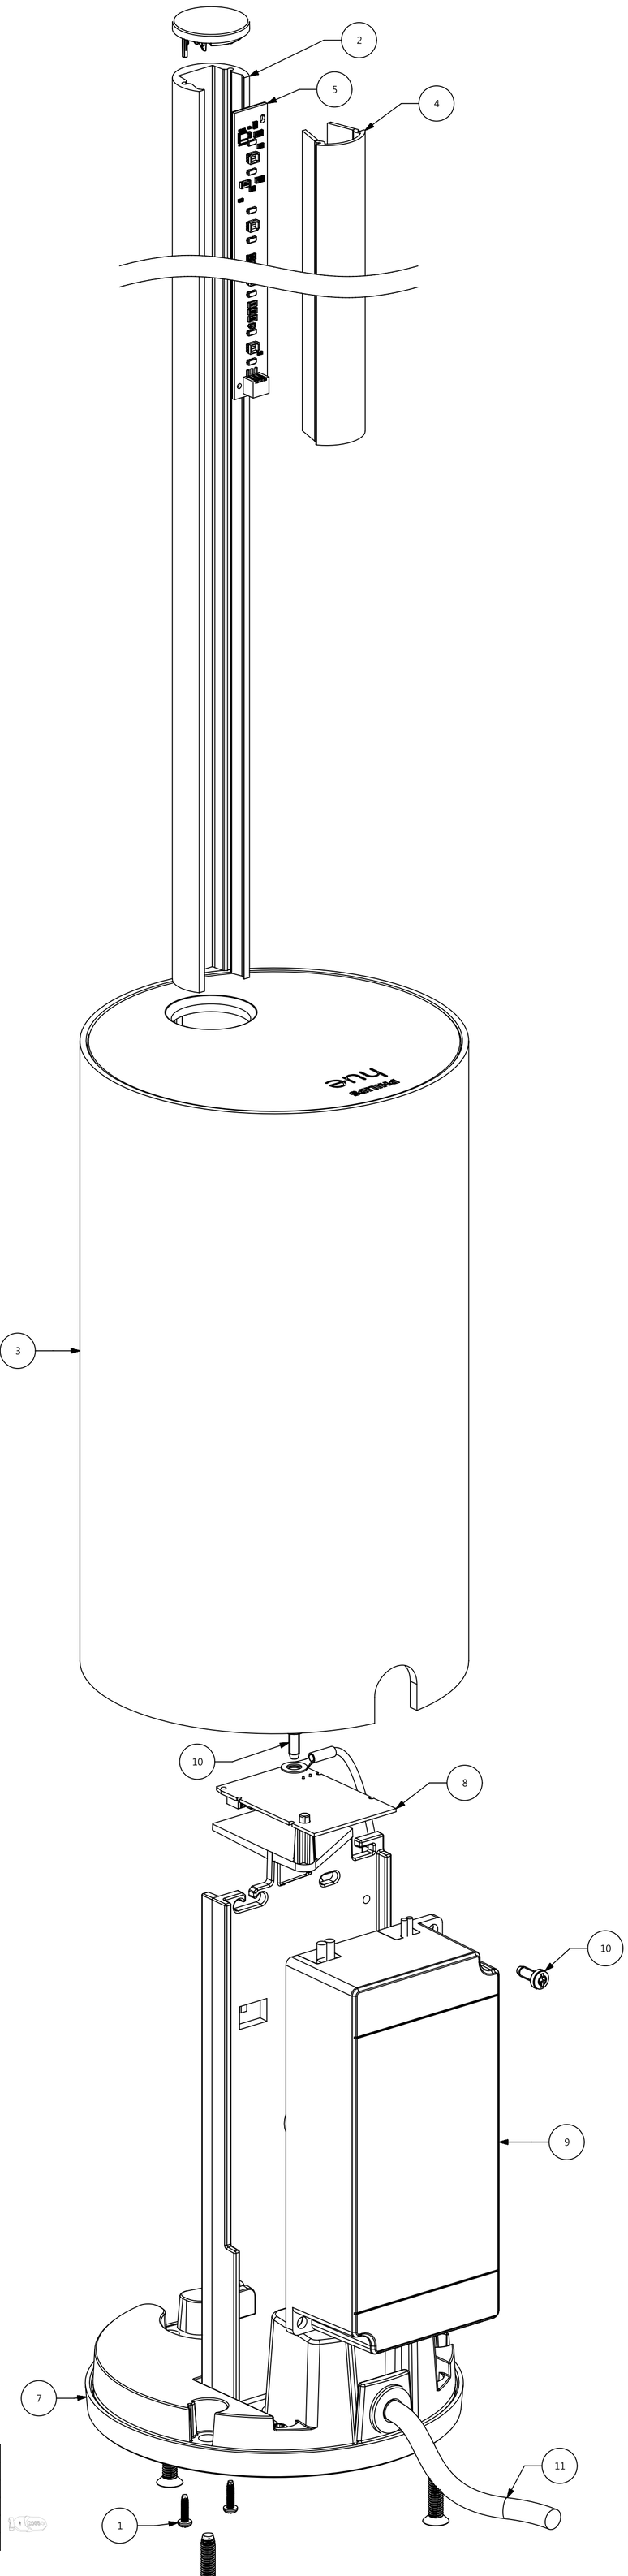

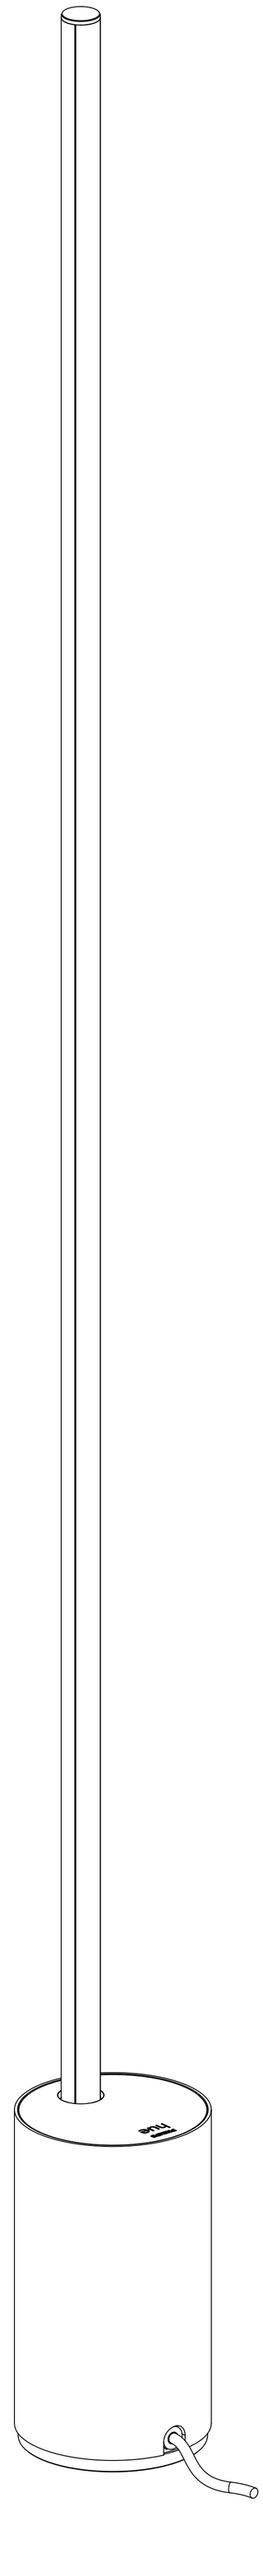

Warnings
Always make sure the luminaire is detached from the mains socket
Always make sure the DC cable is detached from the power supply
Staring at the operating light source may cause eye injury

#	Disassembly Instruction	Tools needed
a	Unscrew the Screws [1]. Pull the tube [2] out of the base [3] and unplug the flat wire from the light source.	Screwdriver T6
b	Pull the diffuser [4] out of the tube [2] and remove the light source* [5]	-
c	Unscrew the 3 screws [6] and remove the foot [7] from the base [3]	Screwdriver T20
d	Unscrew [10] the Hue Connect [8] and Control gear [9]. Loosen the wires from the Hue Connect	Screwdriver T10 / Wago Tool #2065
e	Loosen the wires from the cordset [11] and the Control gear [9]. Pull the cordset out of the frame [12] and foot [7]	-

#	COMPONENT	QTY
1	Screws	2
2	Tube	1
3	Base	1
4	Diffuser	1
5	Light Source	1
6	Screws	3
7	Foot	1
8	Hue Connect	1
9	Control gear	1
10	Screws	2
11	Cordset	1
12	Frame	1

SKU	Color	Country
915005987101	White	EU
915005987201	Black	EU
915005987501	White	NAM
915005987601	Black	NAM
915005987701	White	UK
915005987801	Black	UK
929003103601	Black	AUNZ
929003479701	Oak	EU
929003516101	Oak	UK
929003479901	Oak	NAM

*

FOR LIGHT SOURCE-LED STRIP REMOVAL PLEASE SEE DOCUMENT
"200604 - Instruction LED Strip Removal Procedure"

Ra in µm | ISO1302 ISO12085 | TOLERANCES UNLESS OTHERWISE STATED DIMENSION ± mm ANGLE ± ° | ISO 1101/5459 | DIMENSIONS CRITICAL TO PART QUALITY ARE INDICATED BY AN OBLONG AROUND A DIMENSION AND A PREFIX THAT IS INDICATING THE DEGREE OF CRITICALITY 'SC' xxx OR 'CC' xxx

GENERAL ROUGHNESS	UNIT: MM	MATERIAL	TOLERANCE ACCORDING TO NORM	
SCALE: 1:1	PROJ: EUROP	TREATMENT	ORDER NO.	QUANT
STATUS	DESCRIPTION: Gradient Floor	DESIGN ID: 02	2022-04-19	
		DOC 12NC: 442295217682		
NAME: Ma Vr	LOCAL PART ID 442295215218	SH. 1	SH. 511	A1-P
CHECKED	DATE 2020-03-19		PROPERTY OF: © 2020 Signify Holding	

signify