
PHILIPS hue

| # | COMPONENT | QTY |
|---|---|---|
| 1 | FRAME | 1 |
| 2 | LED STRIP | 2 |
| 3 | DIFFUSER | 1 |
| 4 | LIGHT GUIDE PLATE | 1 |
| 5 | REFLECTIVE PAPER | 1 |
| 6 | EPE FOAM | 1 |
| 7 | BACK PLATE | 1 |
| 8 | INSTALLATION PLATE B | 2 |
| 9 | WAVY SHEETMETAL STOPER B | 2 |
| 10 | DECORATIVE BAR | 4 |
| 11 | SUSPENDED ROPE | 2 |
| 12 | NUT M4 | 2 |
| 13 | M4X12 SCREW | 4 |
| 14 | INSTALLATION BOX | 1 |
| 15 | HUE CONTROL BOX BOTTOM HOUSING | 1 |
| 16 | INSTALLATION PLATE A | 2 |
| 17 | DRIVER | 1 |
| 18 | WAVY SHEETMETAL STOPER A | 2 |
| 19 | SELF TAPPING SCREW M3X6 | 20 |
| 20 | HUE CONTROL PCBA | 1 |
| 21 | HUE CONTROL BOX TOP HOUSING | 1 |
| 22 | SCREW M3X4 | 4 |
| 23 | CORNER PROTECTOR | 4 |
| 24 | L TYPE SHEET METAL PART | 2 |
| 25 | RIVET | 10 |
| 26 | SELF TAPPING SCREW M3X4 | 2 |
| 27 | WIRE CONNECTION BOX | 1 |

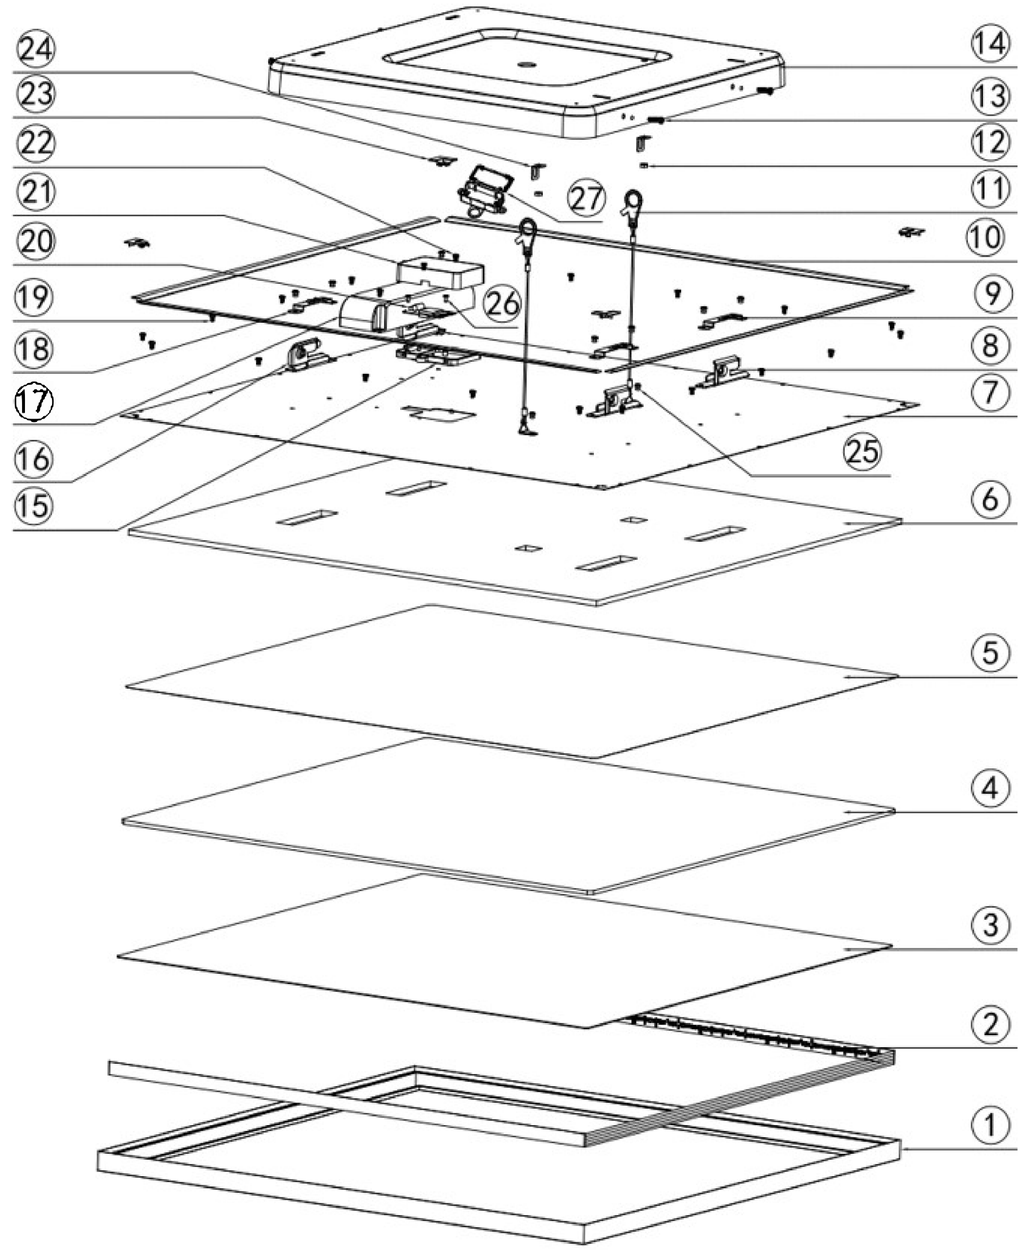


| # | SLR Description | Tools needed |
|---|---|---|
| a | REMOVE INSTALLATION BOX **14** BY UNSCREWING SCRWE 13 | CROSS HEAD SCREW DRIVER |
| b | REMOVE CONNER PROTECTOR 23 | FLAT HEAD SCREW DRIVER |
| c | REMOVE DECORATIVE BAR 10 | |
| d | REMOVE SELF TAPPING SCREW M3X6 19 | CROSS HEAD SCREW DRIVER |
| e | UNSCREW SCREW M3X4 22 | CROSS HEAD SCREW DRIVER |
| f | REMOVE HUE CONTROL BOX TOP HOUSING **21** | **FLAT HEAD SCREW DRIVER** |
| g | UNPLUG FLAT CABLE FROM HUE CONTROL PCBA 20 | |
| h | UNSCREW SELF TAPPING SCREW M3X4 26 | CROSS HEAD SCREW DRIVER |
| i | UNPLUG 24V POWER INPUT WIRE FROM HUE CONTROL PCBA 20 | |
| j | REMOVE BACK PLATE 7 | |
| k | REMOVE EPE FOAM 6 | |
| l | REMOVE REFLECTIVE PAPER 5 | |
| m | REMOVE LIGHT GUIDE PLATE **4** | |
| n | REMOVE DIFFUSER 3 | |
| o | REMOVE LED STRIP 2 FROM FRAME 1 | |

| SKU | Color | Country |
|---|---|---|
| 929003597602 | Black | EU |
| 929003597702 | Black | EU |

**Warnings**

Always make sure the luminaire is detached from the mains socket
Always make sure the DC cable is detached from the power supply
Staring at the operating light source may cause eye injury

FOR LIGHT SOURCE-LED STRIP REMOVAL PLEASE REFER TO DOCUMENT
442295215544_L2 **Removal and Test** Instruction Flex LED strip

| STATUS | DESCRIPTION | DESIGN ID | 2021-08-24 |
|---|---|---|---|
| 2026-07-06 | Aurelle Hue Panel SQ Black 39W,panel extension 600X600mm<br>Aurelle Hue Panel REC Black 39W,panel extension 1200X300mm | DOC 12NC | |
| NAME Mg Lv | LOCAL PART ID | SH 1 | SH A2 |
| CHECKED | DATE 2026-07-06 | | |

Signify