



## LM-79-08 Test Report

for

### Signify North America Corporation

200 Franklin Square Drive, Somerset, NJ 08873, USA

### TYPEB LED TUBE

Model: 9290020142

### Laboratory: Leading Testing Laboratories

NVLAP CODE: 200960-0

3rd Floor, Bld. 2, NO. 96 Longchuanwu Rd Qianjiang Economy Dev. Zone, Yuhang Dist,  
Hangzhou, Zhejiang Province, China 311100

Tel: +86 571 86376106

www.ledtestlab.com

Report No.: HZ18120015b

The laboratory that conducted the testing detailed in this report has been accredited for SSL by NVLAP.

Review by:

Engineer: April Zou  
Dec. 27, 2018

Approved by:



Manager: Jim Zhang  
Dec. 27, 2018

Note: This report does not imply product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

## Test Summary

<b>Model</b>	<b>9290020142</b>
<b>Luminous Efficacy (Lumens /Watt)</b>	124.6
<b>Total Luminous Flux (Lumens)</b>	5406.0
<b>Power (Watts)</b>	43.37
<b>Power Factor</b>	0.9828
<b>CCT (K)</b>	4084
<b>CRI</b>	82.5
<b>Stabilization Time (Light &amp; Power)</b>	60 mins
<b>Note</b>	4000K

Table 1: Executive Data Summary


### Test specifications:

<b>Date of Receipt</b>	: Dec. 12, 2018
<b>Date of Test</b>	: Dec. 21, 2018
<b>Test item</b>	: Total Luminous Flux, Luminous Efficacy, Correlated Color Temperature, Color Rendering Index, Chromaticity Coordinate, Electrical parameters
<b>Reference Standard</b>	: IESNA LM-79-2008 Approved Method for the Electrical and Photometric Measurements of Solid-State Lighting Products

## TABLE OF CONTENT

LM-79-08 Test Report.....	1
Test Summary.....	2
Sample Photo.....	4
TEST RESULTS .....	5
Spectral Power Distribution - Sphere Spectroradiometer Method .....	6
Chromaticity Diagram - Sphere Spectroradiometer Method.....	7
Nominal CCT Quadrangles – Sphere Spectroradiometer Method .....	8
EQUIPMENT LIST .....	9
TEST METHODS .....	9
Seasoning of SSL Product.....	9
Sphere-Spectroradiometer Method- Photometric and Electrical Measurements.....	9

## Sample Photo

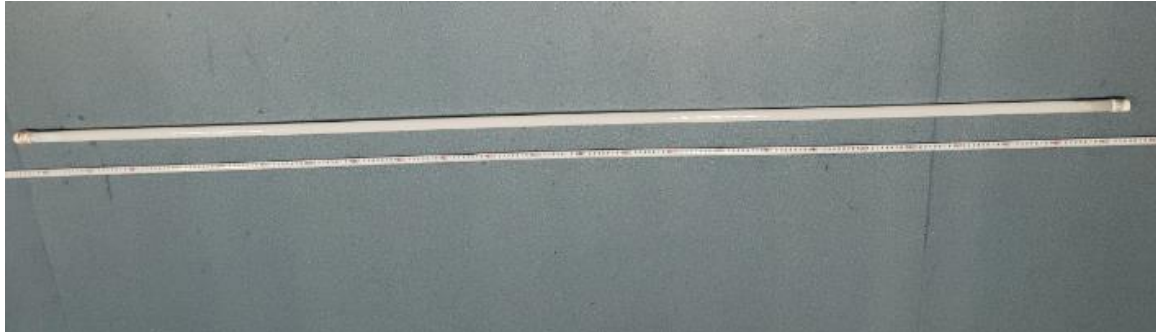

Sample view

### Equipment Under Test (EUT)

<b>Name</b>	: TYPEB LED TUBE
<b>Model</b>	: 9290020142
<b>Electrical Ratings</b>	: 120-277V, 50/60Hz, 44W
<b>Product Description</b>	: 44T8HO/COR/96-840/MF54/G/R17d 10/1
<b>Manufacturer</b>	: Signify North America Corporation
<b>Address</b>	: 200 Franklin Square Drive, Somerset, NJ 08873, USA

## TEST RESULTS

Test ambient temperature was 26.0°C.

Test orientation was Horizontal. Test was conducted without a dimmer in the circuit.

The stabilization time of the sample was 60 minutes, and the total operating time including stabilization was 65 minutes.

### Sphere-Spectroradiometer Method

Parameter	Result	
Test Voltage (V)	120.0	277.0
Voltage frequency (Hz)	60	60
Test Current (A)	0.368	0.165
Power Factor	0.9828	0.9497
Test Power (W)	43.37	43.27
THD A%	18.14	15.91
Luminous Efficacy (lm/W)	124.6	127.0
Total Luminous Flux (lm)	5406.0	5495.0
Color Rendering Index (CRI)	82.5	
R9	7.2	
Correlated Color Temperature (CCT)(K)	4084	
Chromaticity Chroma x	0.3771	
Chromaticity Chroma y	0.3759	
Chromaticity Chroma u	0.2232	
Chromaticity Chroma v	0.3338	
Duv	0	
Chromaticity Chroma u'	0.2232	
Chromaticity Chroma v'	0.5007	

Special Color Rendering Indices	
R1	80.6
R2	88.9
R3	94.6
R4	80.8
R5	80.5
R6	84.3
R7	86
R8	64.3
R9	7.2
R10	73.3
R11	79.1
R12	61.1
R13	82.6
R14	97.2
Rf	82
Rg	95

Table 2: Test data per Sphere-Spectroradiometer Method

Note: According to CIE 1976 ( $u', v'$ ) diagram,  $u' = u = 4x/(-2x+12y+3)$ ,  $v' = 3v/2 = 9y/(-2x+12y+3)$ .

## Spectral Power Distribution - Sphere Spectroradiometer Method


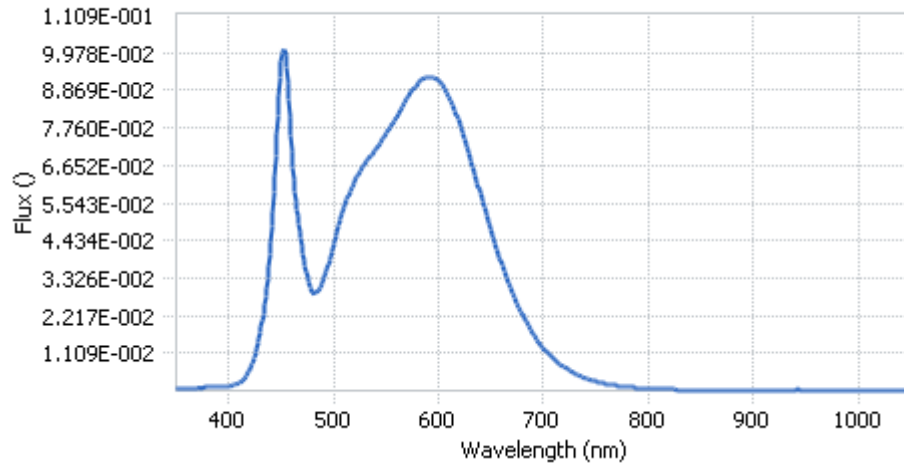


Chart 1: Spectral Power Distribution

Spectral Distribution over Visible Wavelength							
WL(nm)	Radiant(Watts)	WL(nm)	Radiant(Watts)	WL(nm)	Radiant(Watts)	WL(nm)	Radiant(Watts)
380	1.01E-03	485	2.95E-02	590	9.27E-02	695	1.45E-02
385	1.06E-03	490	3.24E-02	595	9.25E-02	700	1.25E-02
390	1.13E-03	495	3.74E-02	600	9.15E-02	705	1.08E-02
395	1.23E-03	500	4.34E-02	605	8.96E-02	710	9.32E-03
400	1.42E-03	505	4.93E-02	610	8.68E-02	715	8.00E-03
405	1.72E-03	510	5.41E-02	615	8.32E-02	720	6.89E-03
410	2.52E-03	515	5.88E-02	620	7.89E-02	725	5.91E-03
415	3.81E-03	520	6.20E-02	625	7.41E-02	730	5.09E-03
420	6.27E-03	525	6.48E-02	630	6.89E-02	735	4.34E-03
425	1.04E-02	530	6.71E-02	635	6.34E-02	740	3.74E-03
430	1.72E-02	535	6.91E-02	640	5.80E-02	745	3.21E-03
435	2.77E-02	540	7.14E-02	645	5.26E-02	750	2.78E-03
440	4.41E-02	545	7.36E-02	650	4.73E-02	755	2.37E-03
445	6.96E-02	550	7.60E-02	655	4.23E-02	760	2.07E-03
450	9.72E-02	555	7.85E-02	660	3.75E-02	765	1.76E-03
455	9.52E-02	560	8.10E-02	665	3.32E-02	770	1.53E-03
460	7.04E-02	565	8.38E-02	670	2.91E-02	775	1.31E-03
465	5.34E-02	570	8.65E-02	675	2.55E-02	780	1.15E-03
470	4.28E-02	575	8.87E-02	680	2.23E-02		
475	3.34E-02	580	9.08E-02	685	1.94E-02		
480	2.90E-02	585	9.21E-02	690	1.68E-02		

Table 3: Spectral Power Distribution Numerical Data per Sphere - Spectroradiometer Method

## Chromaticity Diagram - Sphere Spectroradiometer Method

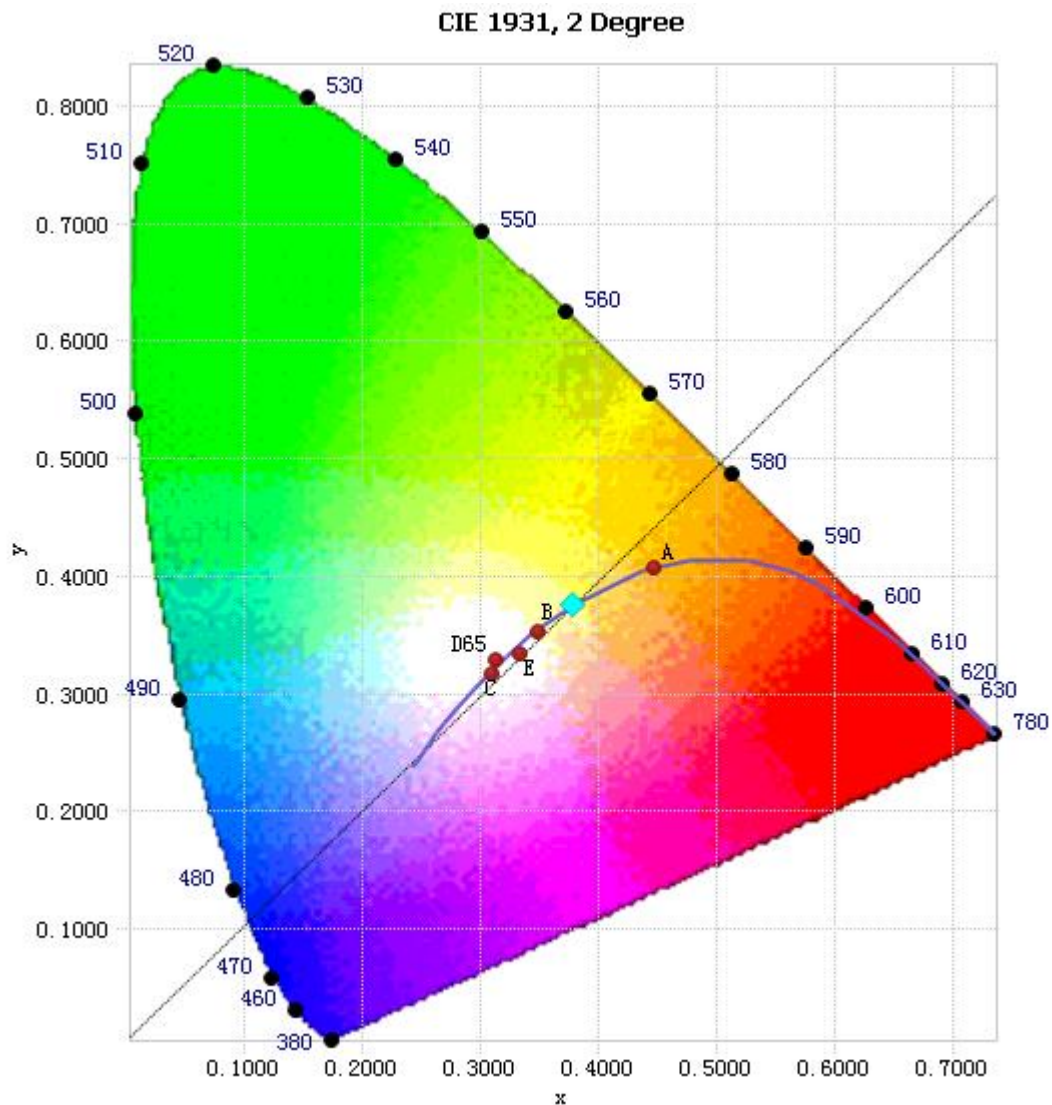

Tristimulus values(x, y) : (0.3771, 0.3759)

Chart 2: Chromaticity Diagram per Sphere - Spectroradiometer Method

Note: The location on the diagram of the tristimulus coordinates are indicated by the blue diamond.

### Nominal CCT Quadrangles – Sphere Spectroradiometer Method

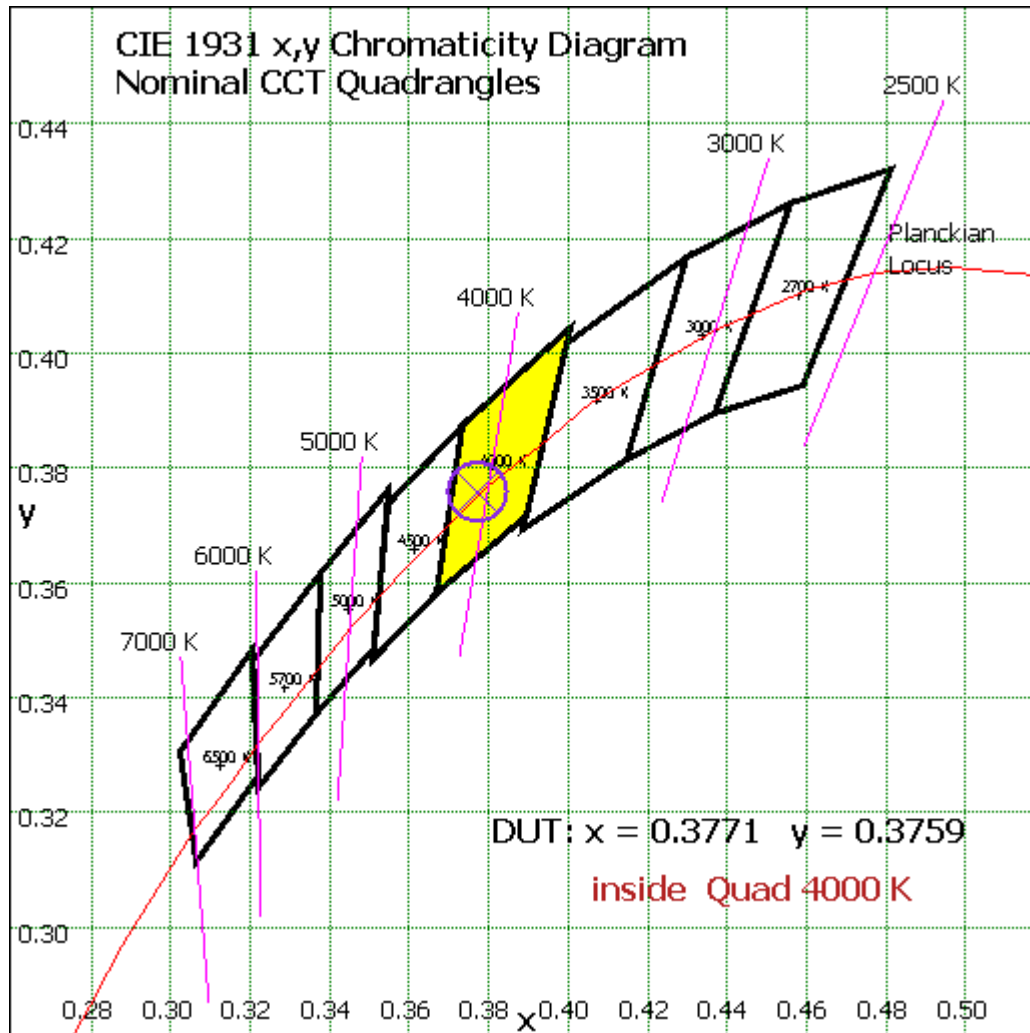


Chart 3: Plot of Lamp x/y coordinates on CIE 1931 Chromaticity Diagram



## EQUIPMENT LIST

Test Equipment	Model	Equipment No.	Calibration Date	Calibration Due date
Integrate Sphere system	3M	HZTE015-04	Aug. 16, 2018	Aug. 15, 2019
Digital Power Meter	WT210	HZTE008-01	Aug. 02, 2018	Aug. 01, 2019
AC Power Supply	PCR 500L	HZTE001-07	Aug. 09, 2018	Aug. 08, 2019
DC Power Supply	IT6154	HZTE004-04	Aug. 09, 2018	Aug. 08, 2019
Temperature and humidity recorder	SCL-1400	HZTE012-02	Aug. 16, 2018	Aug. 15, 2019
Standard source	JR900	HZTE018-02	Aug. 09, 2018	Aug. 08, 2019
Temperature Meter	TES1310	HZTE017-01	Aug. 09, 2018	Aug. 08, 2019

Table 4: Test Equipment List

## TEST METHODS

### Seasoning of SSL Product

For the purpose of rating new SSL products, SSL products shall be tested with no seasoning. Therefore, no seasoning was performed.

### Sphere-Spectroradiometer Method- Photometric and Electrical Measurements

A Labsphere Model CDS 2100 Spectroradiometer and Two Meter Sphere was used to measure correlated color temperature, chromaticity coordinates, and the color rendering index for each SSL unit. The coating reflectance of each sphere is 98%. The measure geometry is  $4\pi$ . Self-absorption correction is conducted in testing. Bandwidth of spectroradiometer is 350nm-1050nm.

Ambient temperature was measured at a position inside the sphere. Each SSL unit was operated on the client provided driver at the rated input voltage in its designated orientation.

The stabilization time typically ranges from 30 min (small integrated LED lamps) to 2 or more hours for large SSL luminaires). It can be judged that stability is reached when the variation (maximum – minimum) of at least 3 readings of the light output and electrical power over a period of 30 min, taken 15 minutes apart, is less than 0.5 %.

Electrical measurements including voltage, current, and power were measured using the Yokogawa Power Analyzer.

The standard reference of the integrated sphere system is halogen incandescent lamp, the intensity distribution type is omni-directional, and is traceable to the National Institute of Standards and Technology.

The uncertainty of integrating sphere system reported in this document is expanded uncertainty is 2.1% with a coverage factor  $k=2$ .

\*\*\* End of Report \*\*\*

This report is considered invalidated without the Special Seal for Inspection of the LTL. This report shall not be altered, increased or deleted. The results shown in this test report refer only to the sample(s) tested. Without written approval of LTL, this test report shall not be copied except in full and published as advertisement.