

产品名称
SM DL
3INCH EMEA
借(通)用件登记
描图


描校
旧底图总号

底图总号
签名

日期
26. 1. 16

No.	COMPONENT	QTY
1	Front Cover	1
2	Foam	1
3	Diffuser	1
4	Reflector Ring	1
5	Light Guide Plate	1
6	Reflector Paper	1
7	Screw ST2.9x8	4
8	LED Strip	1
9	Glue	1
10	Housing	1
11	Mounting Spring	2
12	Screw M2.5x3	2
13	Rear Cover	1
14	PSU	1

No.	SLR Description	Tools needed
a	Remove Mounting Spring 11	
b	Unscrew Screw M2.5x3 12	Cross Head Screw Driver
c	Rotate then remove Front Cover 1	
d	Remove Glue 9	Flat Head Screw Driver
e	Remove Diffuser 3	Flat Head Screw Driver
f	Remove Reflector Ring 4	
g	Remove Light Guide Plate 5	
h	Remove Reflector Paper 6	
i	Unscrew Screw ST2.9x8 7 then remove Rear Cover 13	Cross Head Screw Driver
j	Unplug LED Strip 8 from PSU 14	
H	Remove LED Strip 8 from Housing 9	

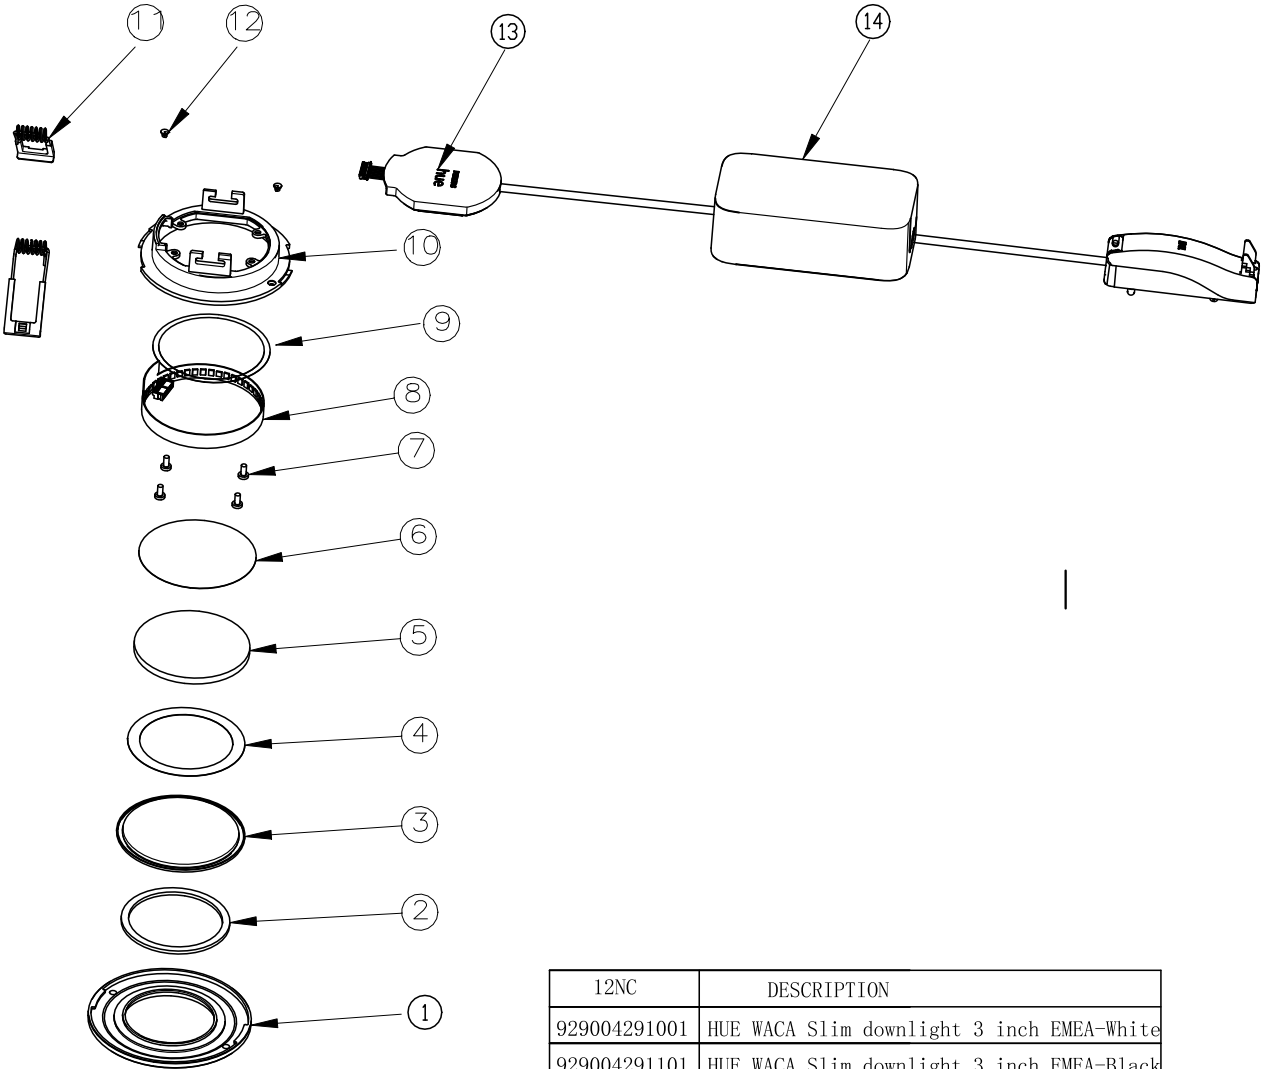

12NC	DESCRIPTION
929004291001	HUE WACA Slim downlight 3 inch EMEA-White
929004291101	HUE WACA Slim downlight 3 inch EMEA-Black
929004291002	HUE WACA Slim DL 3inch EMEA-White Multi
929004291102	HUE WACA Slim DL 3inch EMEA-Black Multi

Warnings

Always make sure the luminaire is detached from the mains socket
Always make sure the DC cable is detached from the power supply
Staring at the operating light source may cause eye injury