
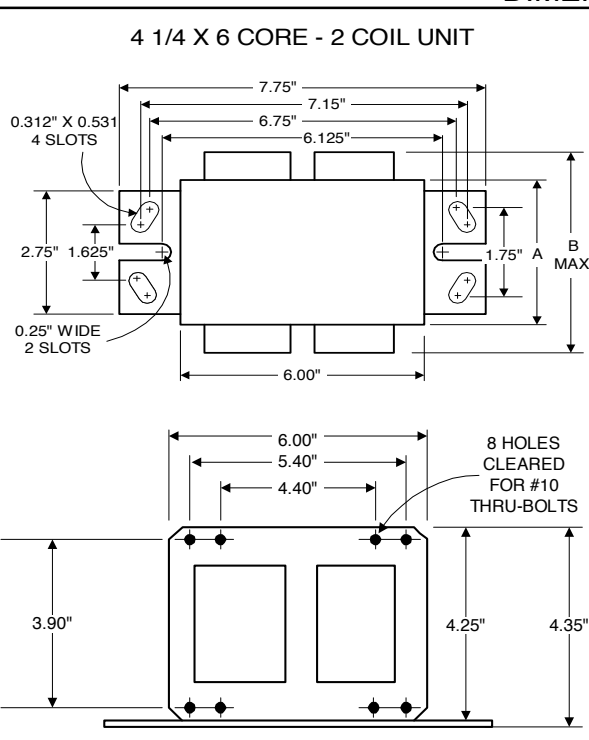
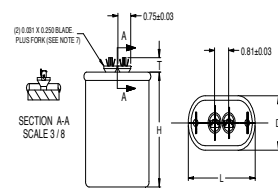


### Electrical Specifications at 120-277-347V

DIMENSIONS AND DATA		120	277	347																																																																																																																																																																																																																																																							
<p><b>4 1/4 X 6 CORE - 2 COIL UNIT</b></p> 		<table border="1"> <tr> <td>INPUT VOLTS</td> <td></td> <td>120</td> <td>277</td> <td>347</td> <td></td> <td></td> </tr> <tr> <td>CIRCUIT TYPE</td> <td>CWA</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>POWER FACTOR (min)</td> <td>90%</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>REGULATION</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>    Line Volts</td> <td>±10%</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>    Lamp Watts</td> <td>±10%</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>LINE CURRENT (Amps)</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>    Operating.....</td> <td></td> <td>9.00</td> <td>3.90</td> <td>3.20</td> <td></td> <td></td> </tr> <tr> <td>    Open Circuit.....</td> <td></td> <td>4.50</td> <td>2.20</td> <td>1.70</td> <td></td> <td></td> </tr> <tr> <td>    Starting.....</td> <td></td> <td>7.80</td> <td>3.20</td> <td>2.50</td> <td></td> <td></td> </tr> <tr> <td>UL TEMPERATURE RATINGS</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>    Insulation Class</td> <td>H(180°C)</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>    Coil Temperature Code</td> <td>1029</td> <td>D</td> <td>C</td> <td>C</td> <td></td> <td></td> </tr> <tr> <td>MIN. AMBIENT STARTING TEMP.</td> <td>-20°F or -30°C</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>NOM. OPEN CIRCUIT VOLTAGE</td> <td>430</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>INPUT VOLTAGE AT LAMP DROPOUT.....</td> <td></td> <td>84</td> <td>194</td> <td>243</td> <td></td> <td></td> </tr> <tr> <td>INPUT WATTS</td> <td>1080</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>RECOMMENDED FUSE (Amps).....</td> <td></td> <td>20</td> <td>10</td> <td>8</td> <td></td> <td></td> </tr> <tr> <td>CORE and COIL</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>    Dimension (A)</td> <td>2.80</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>    Dimension (B)</td> <td>4.50</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>    Weight (lbs.)</td> <td>21</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>    Lead Lengths</td> <td>12"</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>CAPACITOR REQUIREMENT</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>    Microfarads</td> <td>24.0</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>    Volts (min.)</td> <td>480</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>    Fault Current Withstand (amps)</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>60 Hz TEST PROCEDURES (Refer to Advance Test Procedure for HID Ballasts - Form 1270)</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>High Potential Test (Volts)</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>    1 minute</td> <td>2000</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>    2 seconds</td> <td>2500</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>Open Circuit Voltage Test (Volts)</td> <td>385-475</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>Short-Circuit Current Test (Amps)</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>    Secondary Current</td> <td>5.20-6.40</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>    Input Current.....</td> <td></td> <td>4.80-7.30</td> <td>2.00-3.10</td> <td>1.60-2.60</td> <td>-</td> <td>-</td> </tr> </table>					INPUT VOLTS		120	277	347			CIRCUIT TYPE	CWA						POWER FACTOR (min)	90%						REGULATION							Line Volts	±10%						Lamp Watts	±10%						LINE CURRENT (Amps)							Operating.....		9.00	3.90	3.20			Open Circuit.....		4.50	2.20	1.70			Starting.....		7.80	3.20	2.50			UL TEMPERATURE RATINGS							Insulation Class	H(180°C)						Coil Temperature Code	1029	D	C	C			MIN. AMBIENT STARTING TEMP.	-20°F or -30°C						NOM. OPEN CIRCUIT VOLTAGE	430						INPUT VOLTAGE AT LAMP DROPOUT.....		84	194	243			INPUT WATTS	1080						RECOMMENDED FUSE (Amps).....		20	10	8			CORE and COIL							Dimension (A)	2.80						Dimension (B)	4.50						Weight (lbs.)	21						Lead Lengths	12"						CAPACITOR REQUIREMENT							Microfarads	24.0						Volts (min.)	480						Fault Current Withstand (amps)							60 Hz TEST PROCEDURES (Refer to Advance Test Procedure for HID Ballasts - Form 1270)							High Potential Test (Volts)							1 minute	2000						2 seconds	2500						Open Circuit Voltage Test (Volts)	385-475						Short-Circuit Current Test (Amps)							Secondary Current	5.20-6.40						Input Current.....		4.80-7.30	2.00-3.10	1.60-2.60	-	-
INPUT VOLTS		120	277	347																																																																																																																																																																																																																																																							
CIRCUIT TYPE	CWA																																																																																																																																																																																																																																																										
POWER FACTOR (min)	90%																																																																																																																																																																																																																																																										
REGULATION																																																																																																																																																																																																																																																											
Line Volts	±10%																																																																																																																																																																																																																																																										
Lamp Watts	±10%																																																																																																																																																																																																																																																										
LINE CURRENT (Amps)																																																																																																																																																																																																																																																											
Operating.....		9.00	3.90	3.20																																																																																																																																																																																																																																																							
Open Circuit.....		4.50	2.20	1.70																																																																																																																																																																																																																																																							
Starting.....		7.80	3.20	2.50																																																																																																																																																																																																																																																							
UL TEMPERATURE RATINGS																																																																																																																																																																																																																																																											
Insulation Class	H(180°C)																																																																																																																																																																																																																																																										
Coil Temperature Code	1029	D	C	C																																																																																																																																																																																																																																																							
MIN. AMBIENT STARTING TEMP.	-20°F or -30°C																																																																																																																																																																																																																																																										
NOM. OPEN CIRCUIT VOLTAGE	430																																																																																																																																																																																																																																																										
INPUT VOLTAGE AT LAMP DROPOUT.....		84	194	243																																																																																																																																																																																																																																																							
INPUT WATTS	1080																																																																																																																																																																																																																																																										
RECOMMENDED FUSE (Amps).....		20	10	8																																																																																																																																																																																																																																																							
CORE and COIL																																																																																																																																																																																																																																																											
Dimension (A)	2.80																																																																																																																																																																																																																																																										
Dimension (B)	4.50																																																																																																																																																																																																																																																										
Weight (lbs.)	21																																																																																																																																																																																																																																																										
Lead Lengths	12"																																																																																																																																																																																																																																																										
CAPACITOR REQUIREMENT																																																																																																																																																																																																																																																											
Microfarads	24.0																																																																																																																																																																																																																																																										
Volts (min.)	480																																																																																																																																																																																																																																																										
Fault Current Withstand (amps)																																																																																																																																																																																																																																																											
60 Hz TEST PROCEDURES (Refer to Advance Test Procedure for HID Ballasts - Form 1270)																																																																																																																																																																																																																																																											
High Potential Test (Volts)																																																																																																																																																																																																																																																											
1 minute	2000																																																																																																																																																																																																																																																										
2 seconds	2500																																																																																																																																																																																																																																																										
Open Circuit Voltage Test (Volts)	385-475																																																																																																																																																																																																																																																										
Short-Circuit Current Test (Amps)																																																																																																																																																																																																																																																											
Secondary Current	5.20-6.40																																																																																																																																																																																																																																																										
Input Current.....		4.80-7.30	2.00-3.10	1.60-2.60	-	-																																																																																																																																																																																																																																																					
<p>Capacitor: MD2409-100</p>  <p>Capacitance: 24          Dia/Oval Dim: 1.75          Height: 3.9          Temp Rating: 90°C</p>		<p>Wiring Diagram:</p>  <p>Fig. A</p>																																																																																																																																																																																																																																																									
<p>Ignitor: NA</p> <p>This ballast does not require the use of an ignitor.</p>		<p>Ordering Information</p> <table border="1"> <thead> <tr> <th>Order Suffix</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td> </td> <td> </td> </tr> </tbody> </table>					Order Suffix	Description																																																																																																																																																																																																																																																			
Order Suffix	Description																																																																																																																																																																																																																																																										
<p>Data is based upon tests performed by Advance Transformer in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.</p>																																																																																																																																																																																																																																																											

# Metal Halide 71A65A2

The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract.

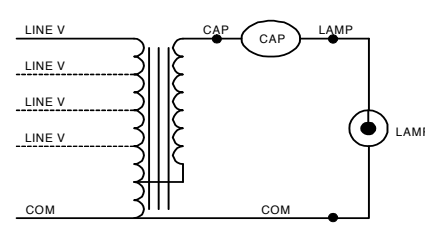

© 2019 Signify Holding. All rights reserved. This document contains information relating to the product portfolio of Signify which information may be subject to change. No representation or warranty as to the accuracy or completeness of the information included herein is given and any liability for any action in reliance thereon is disclaimed. All trademarks are owned by Signify Holding or their respective owners.

Signify North America Corporation  
200 Franklin Square Drive,  
Somerset, NJ 08873  
Telephone 855-486-2216

Signify Canada Ltd.  
281 Hillmount Road,  
Markham, ON, Canada L6C 2S3  
Telephone 800-668-9008