






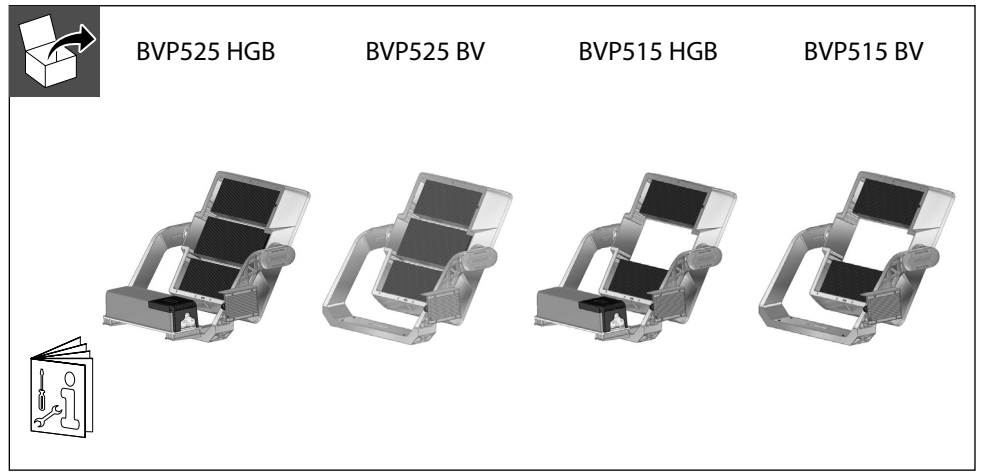

PHILIPS

OptiVision LED gen2
Floodlight

BVP525/BVP515





Type	LIFE L80B10 Ta=25°C	led color	Flux (lm) +/- 7%	W +/- 10%	outdoor	indoor	outdoor	HGB	BV
BVP525	100000h	757	202000	1471	15° C	-	-40° C	35,5	28
BVP525	100000h	757	193000	1392	20° C	-	-40° C	35,5	28
BVP525	100000h	757	186000	1314	25° C	-	-40° C	35,5	28
BVP525	100000h	757	178000	1236	30° C	-	-40° C	35,5	28
BVP525	100000h	757	170000	1160	35° C	-	-40° C	35,5	28
BVP525	100000h	757	161000	1082	40° C	-	-40° C	35,5	28
BVP525	100000h	757	148000	964	45° C	-	-40° C	35,5	28
BVP525	100000h	757	148000	964	-	35° C	-40° C	35,5	28
BVP525	100000h	757	134000	845	-	45° C	-40° C	35,5	28
BVP525	100000h	740	194000	1471	15° C	-	-40° C	35,5	28
BVP525	100000h	740	187000	1392	20° C	-	-40° C	35,5	28
BVP525	100000h	740	180000	1314	25° C	-	-40° C	35,5	28
BVP525	100000h	740	172000	1236	30° C	-	-40° C	35,5	28
BVP525	100000h	740	164000	1160	35° C	-	-40° C	35,5	28
BVP525	100000h	740	155000	1082	40° C	-	-40° C	35,5	28
BVP525	100000h	740	143000	964	45° C	-	-40° C	35,5	28
BVP525	100000h	740	143000	964	-	35° C	-40° C	35,5	28
BVP525	100000h	740	130000	845	-	45° C	-40° C	35,5	28
BVP525	50000h	757	202000	1471	15° C	-	-40° C	35,5	28
BVP525	50000h	757	202000	1471	20° C	-	-40° C	35,5	28
BVP525	50000h	757	202000	1471	25° C	-	-40° C	35,5	28
BVP525	50000h	757	193000	1392	30° C	-	-40° C	35,5	28
BVP525	50000h	757	186000	1314	35° C	-	-40° C	35,5	28
BVP525	50000h	757	178000	1236	40° C	-	-40° C	35,5	28
BVP525	50000h	757	170000	1160	45° C	-	-40° C	35,5	28
BVP525	50000h	757	170000	1160	-	35° C	-40° C	35,5	28
BVP525	50000h	757	148000	964	-	45° C	-40° C	35,5	28
BVP525	50000h	740	194000	1471	15° C	-	-40° C	35,5	28
BVP525	50000h	740	194000	1471	20° C	-	-40° C	35,5	28
BVP525	50000h	740	194000	1471	25° C	-	-40° C	35,5	28
BVP525	50000h	740	187000	1392	30° C	-	-40° C	35,5	28
BVP525	50000h	740	180000	1314	35° C	-	-40° C	35,5	28
BVP525	50000h	740	172000	1236	40° C	-	-40° C	35,5	28
BVP525	50000h	740	164000	1160	45° C	-	-40° C	35,5	28

Type	LIFE L80B10 Ta=25°C	 led color	Flux (lm) +/- 7%	W +/- 10%				 HGB	 BV
BVP525	50000h	740	164000	1160	-	35° C	-40° C	35,5	28
BVP525	50000h	740	143000	964	-	45° C	-40° C	35,5	28
BVP515	100000h	757	134000	981	15° C	-	-40° C	29,5	22
BVP515	100000h	757	129000	928	20° C	-	-40° C	29,5	22
BVP515	100000h	757	124000	876	25° C	-	-40° C	29,5	22
BVP515	100000h	757	119000	824	30° C	-	-40° C	29,5	22
BVP515	100000h	757	113000	773	35° C	-	-40° C	29,5	22
BVP515	100000h	757	107000	722	40° C	-	-40° C	29,5	22
BVP515	100000h	757	99000	643	45° C	-	-40° C	29,5	22
BVP515	100000h	757	99000	643	-	35° C	-40° C	29,5	22
BVP515	100000h	757	89000	564	-	45° C	-40° C	29,5	22
BVP515	100000h	740	129000	981	15° C	-	-40° C	29,5	22
BVP515	100000h	740	125000	928	20° C	-	-40° C	29,5	22
BVP515	100000h	740	120000	876	25° C	-	-40° C	29,5	22
BVP515	100000h	740	114000	824	30° C	-	-40° C	29,5	22
BVP515	100000h	740	109000	773	35° C	-	-40° C	29,5	22
BVP515	100000h	740	104000	722	40° C	-	-40° C	29,5	22
BVP515	100000h	740	96000	643	45° C	-	-40° C	29,5	22
BVP515	100000h	740	96000	643	-	35° C	-40° C	29,5	22
BVP515	100000h	740	86000	564	-	45° C	-40° C	29,5	22
BVP515	50000h	757	134000	981	15° C	-	-40° C	29,5	22
BVP515	50000h	757	134000	981	20° C	-	-40° C	29,5	22
BVP515	50000h	757	134000	981	25° C	-	-40° C	29,5	22
BVP515	50000h	757	129000	928	30° C	-	-40° C	29,5	22
BVP515	50000h	757	124000	876	35° C	-	-40° C	29,5	22
BVP515	50000h	757	119000	824	40° C	-	-40° C	29,5	22
BVP515	50000h	757	113000	773	45° C	-	-40° C	29,5	22
BVP515	50000h	757	113000	773	-	35° C	-40° C	29,5	22
BVP515	50000h	757	99000	643	-	45° C	-40° C	29,5	22
BVP515	50000h	740	129000	981	15° C	-	-40° C	29,5	22
BVP515	50000h	740	129000	981	20° C	-	-40° C	29,5	22
BVP515	50000h	740	129000	981	25° C	-	-40° C	29,5	22
BVP515	50000h	740	125000	928	30° C	-	-40° C	29,5	22
BVP515	50000h	740	120000	876	35° C	-	-40° C	29,5	22
BVP515	50000h	740	114000	824	40° C	-	-40° C	29,5	22
BVP515	50000h	740	109000	773	45° C	-	-40° C	29,5	22
BVP515	50000h	740	109000	773	-	35° C	-40° C	29,5	22
BVP515	50000h	740	96000	643	-	45° C	-40° C	29,5	22

SCx Values

Configuration	SCx(m ²)				
	0°	15°	40°	65°	90°
BVP415/515 HGB	0,32	0,36	0,39	0,37	0,37
BVP415/515 HGB + ZVP500 L-A90	0,33	0,36	0,38	0,38	0,38
BVP415/515 BV	0,14	0,20	0,27	0,25	0,29
BVP415/515 BV + ZVP500 L-A90	0,25	0,3	0,37	0,36	0,38
BVP425/525 HGB	0,20	0,30	0,30	0,30	0,55
BVP425/525 HGB + louver ZVP520 L-A90	0,32	0,39	0,43	0,48	0,57
BVP425/525 BV	0,15	0,23	0,31	0,35	0,39
BVP425/525 BV+ louver ZVP520 L-A90	0,24	0,33	0,43	0,5	0,56


Any modification on the luminaire will cancel the warranty

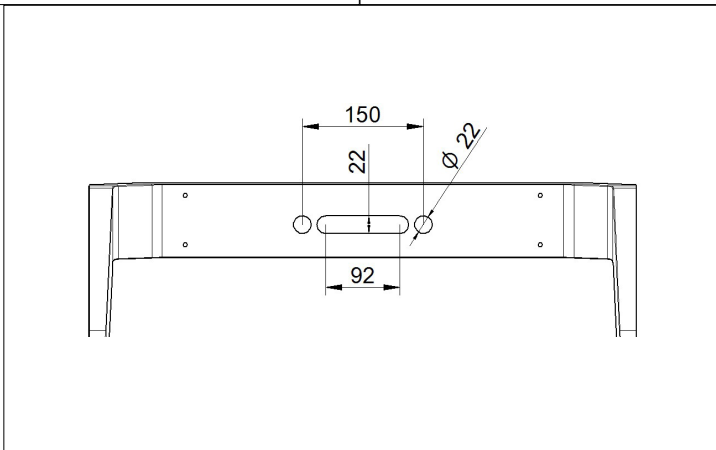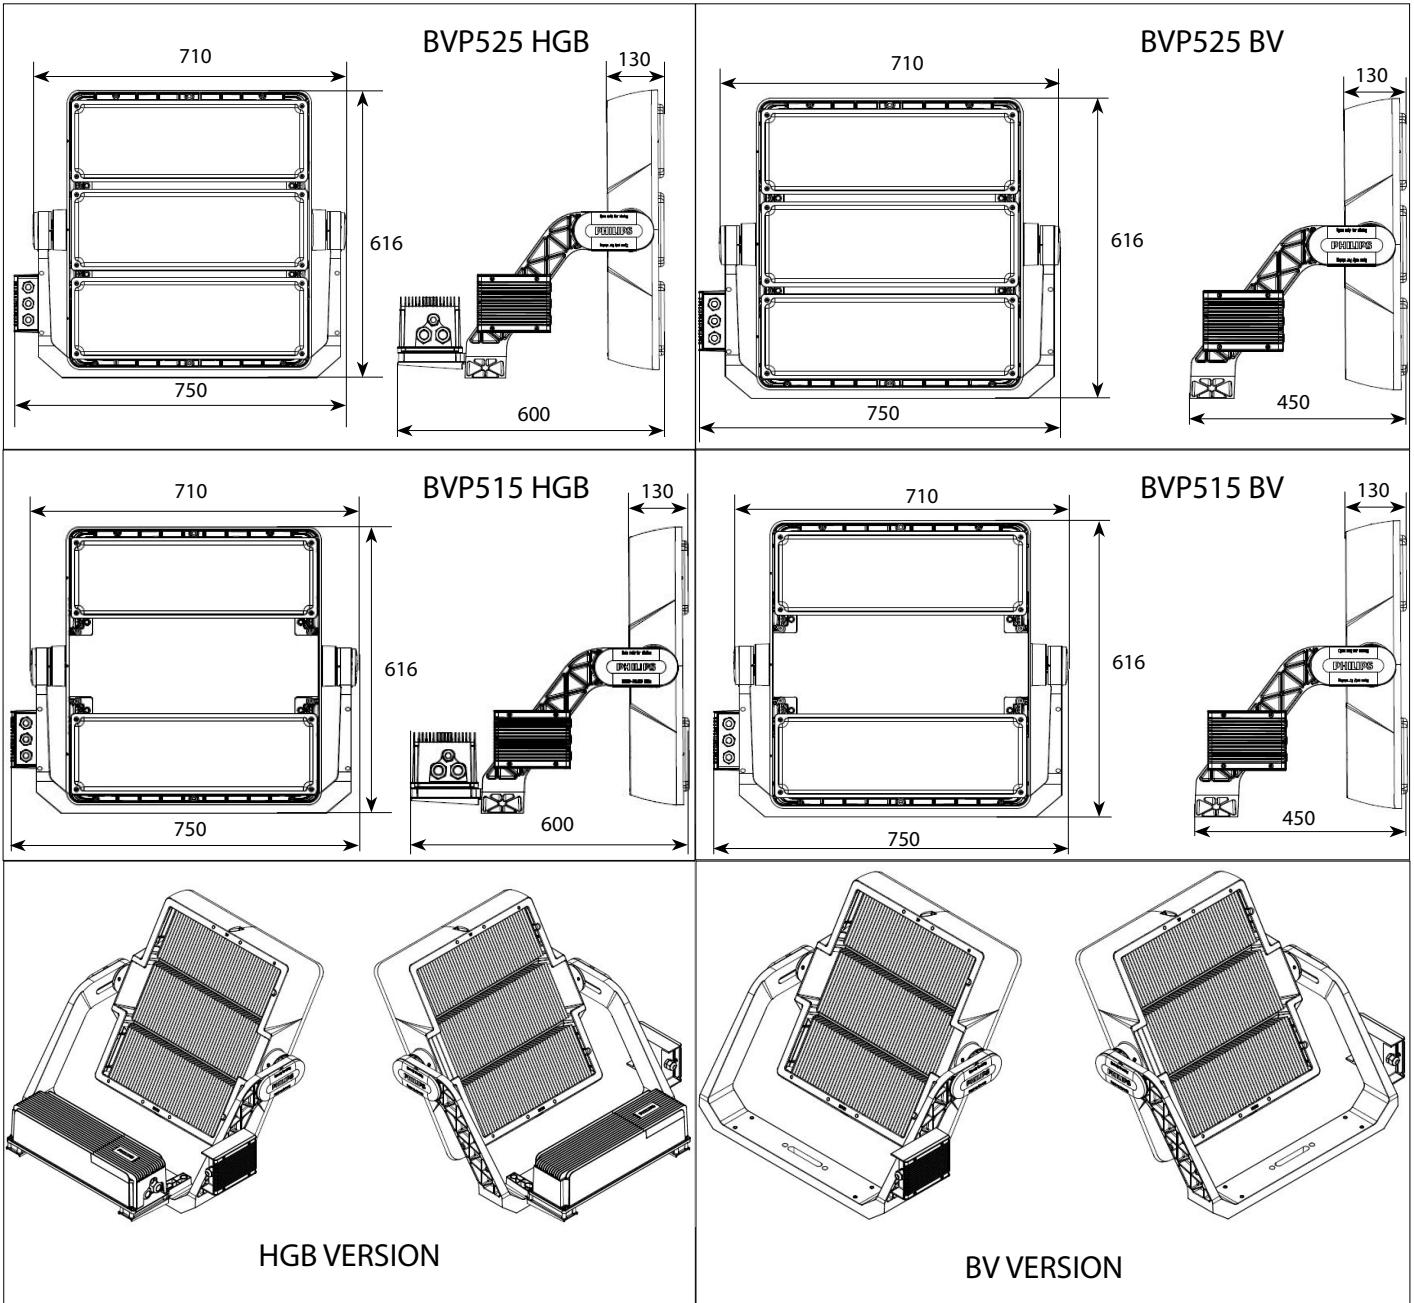




BRACKET FIXATION DETAIL



In luminaire version for swimming pool applications (SWP):
 Fixture mounting system (including fasteners) needs to be compliant with EN 13451-1 or MIS 1203
 Mounting system and product shall be a subject of periodical inspection at least every year.
 Any rusted element needs to be replaced.

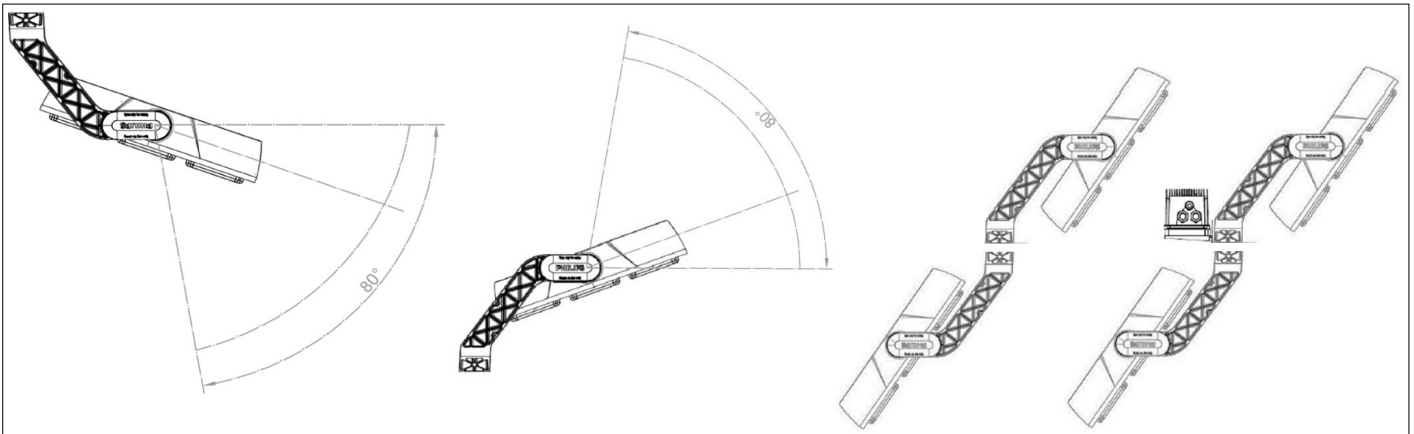

POSITIONS NOT ALLOWED

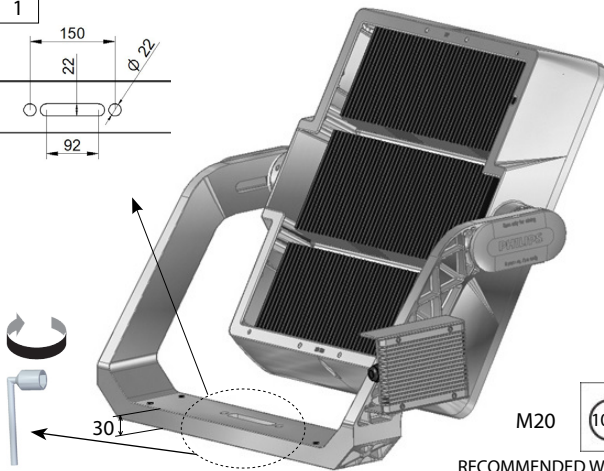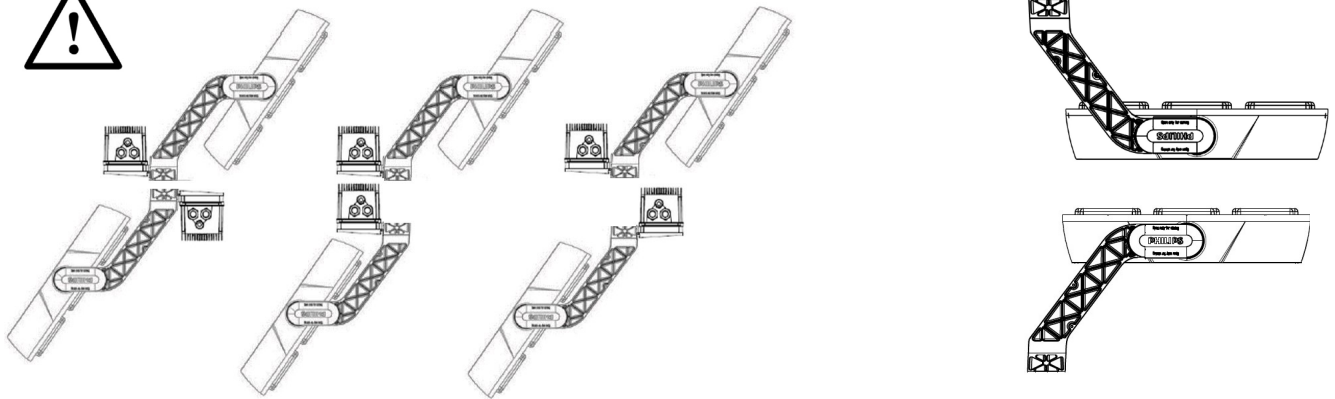

M20




RECOMMENDED WASHER
ACCORDING TO DIN9021







The fasteners have to resist environment corrosion.
Stainless steel screws not recommended and protective
coating might be applied.

In case of using only one fixation point
and if the luminaire is higher >3m, the use
of a 2nd fixing security system is needed

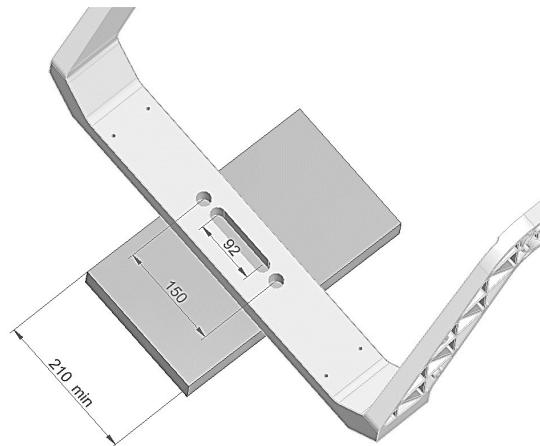


2




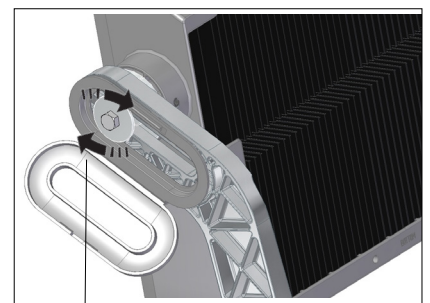
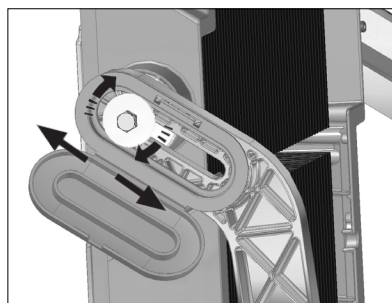
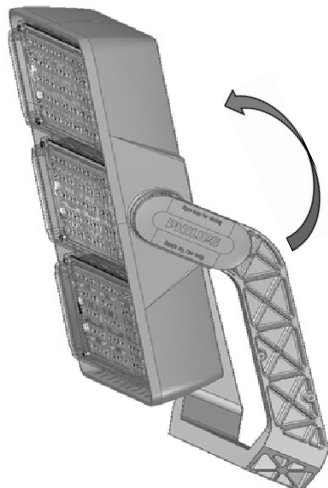



50Nm x2

17

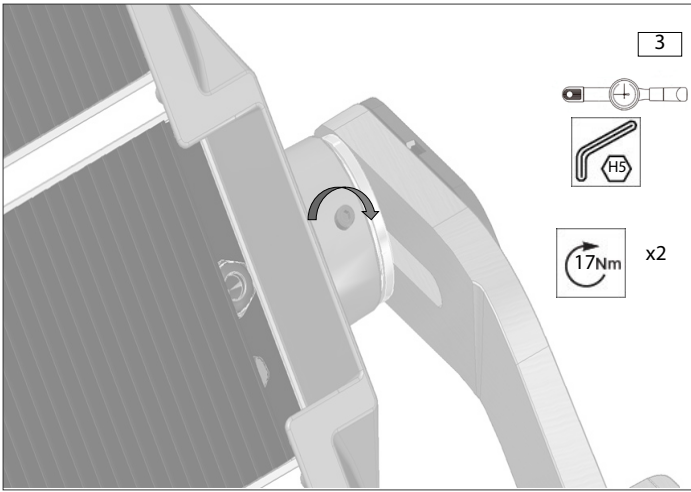


MAINTENANCE

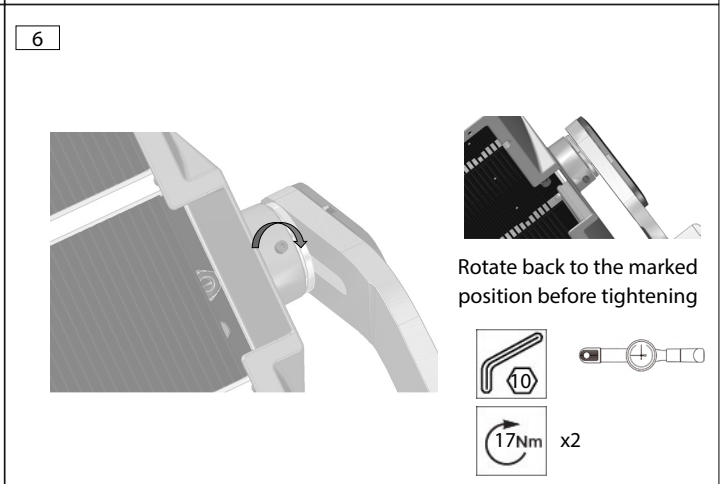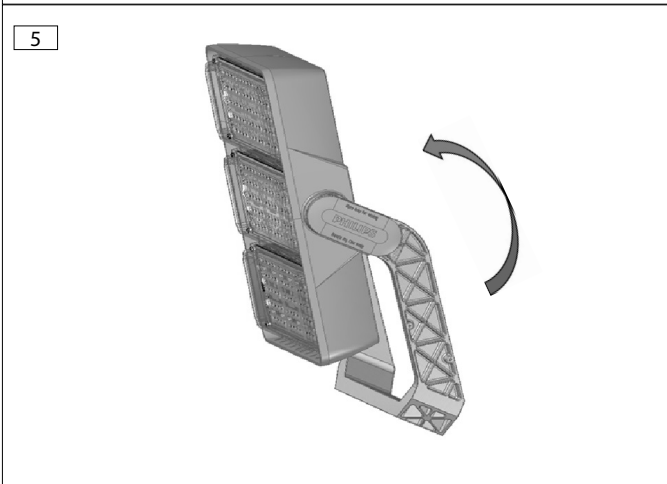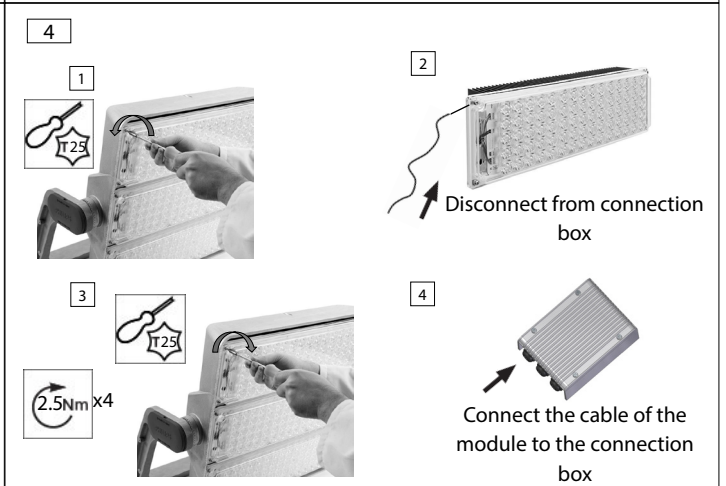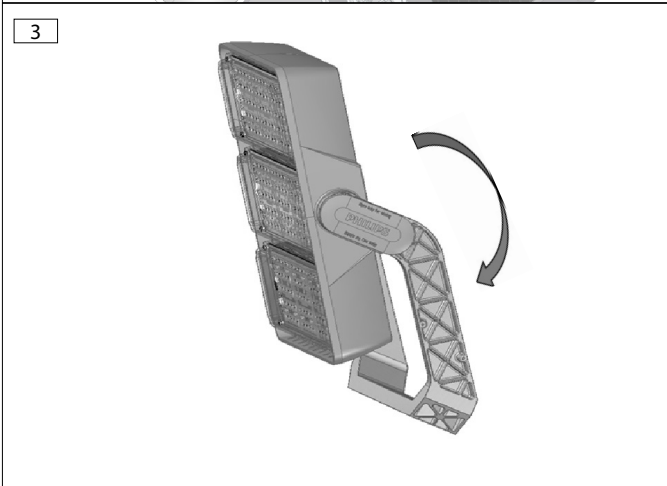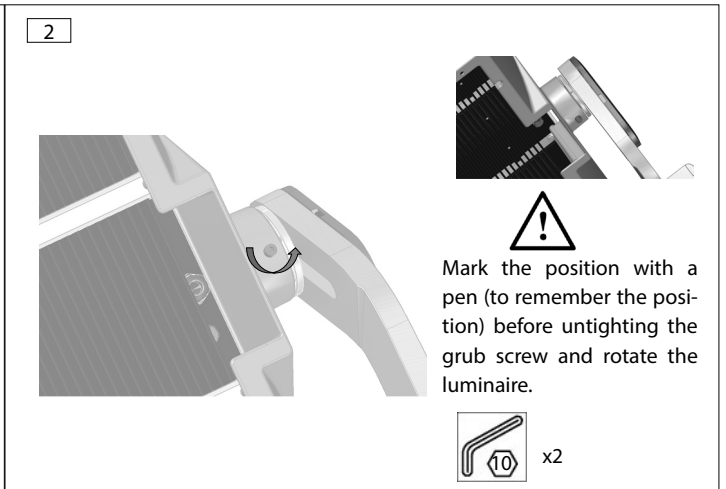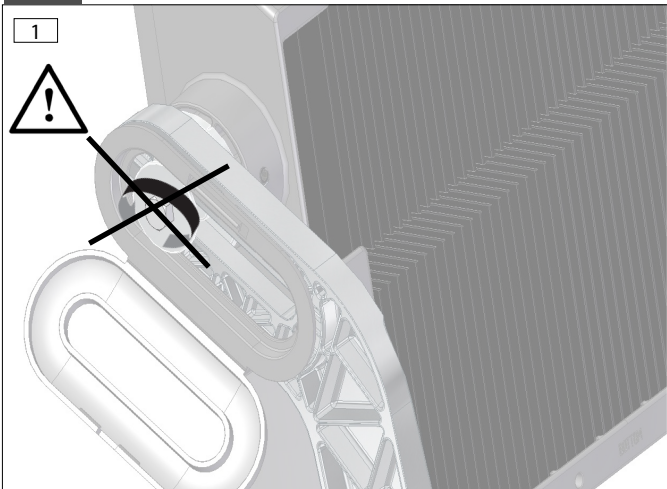


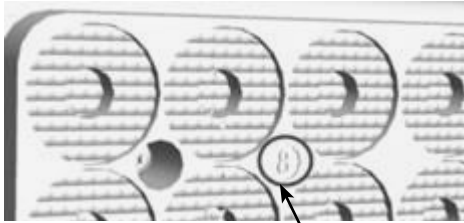

OPTIC TYPE




OPTIC TYPE
NB/MB/WB/VBW

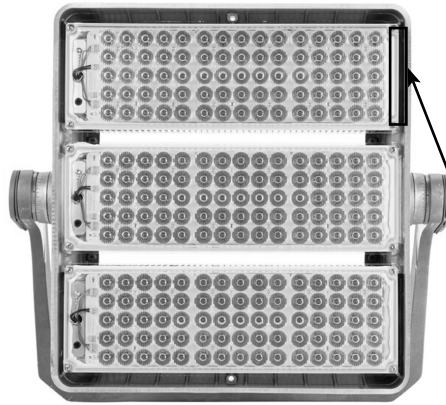

LIGHT MODULE LABEL
12 NC: 9123XXXXXXXX
I: 0,8-2,0 A
Tc: 90°C



CLEANING

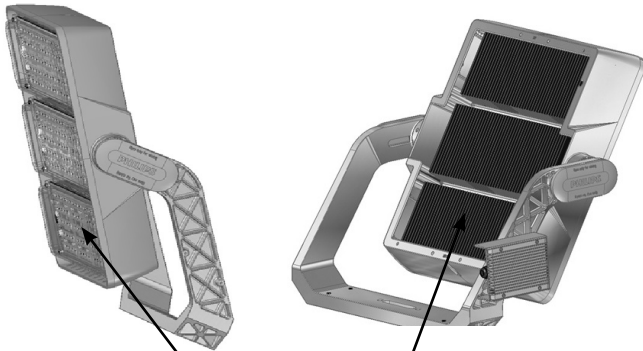


CLEANING PARTS

1. Remove physical elements that can block and modify the aircooling (heatsink fins)
2. Cleaning Frequency (depending on installation place and environment)

Cleaning Interval (months)	Pollution Category		
	High	Medium	Low
6	0,91	0,92	0,96
12	0,86	0,88	0,94
18	0,83	0,85	0,92
24	0,81	0,83	0,91
36	0,79	0,82	0,9

OPTICAL COVER

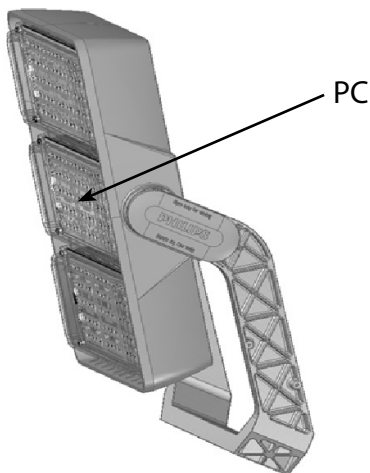

CLEANING TECHNIQUES

1. Always test the sample with the cleaner and according to the chosen technique before
2. Do not leave cleaners on plastic parts for a long period
3. Do not apply cleaners in direct sunlight or at elevated temperatures



RECOMMENDED
Mild Soap
Lukewarm Water
Soft/Grid free Cloth
Sponge
Water Cleaning


FORBIDDEN
Abrasive Cleaners
Highly Alkaline Cleaners
Aromatic Solvents
Halogenated Solvents
Brushes
Steel Wood
Squeegess, razorblades




The list is not exhaustive

ACCESORIES

LOUVRE

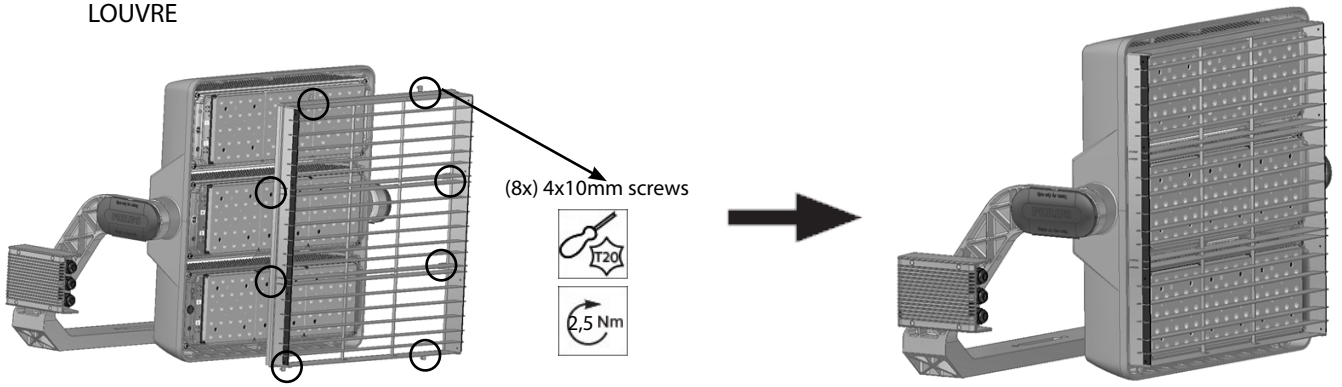




12NC: 912300022867 (ZVP520 L-A90): External zero candela louvre
 12NC: 912300022588 (ZVP420 L): External spill-light control louvre

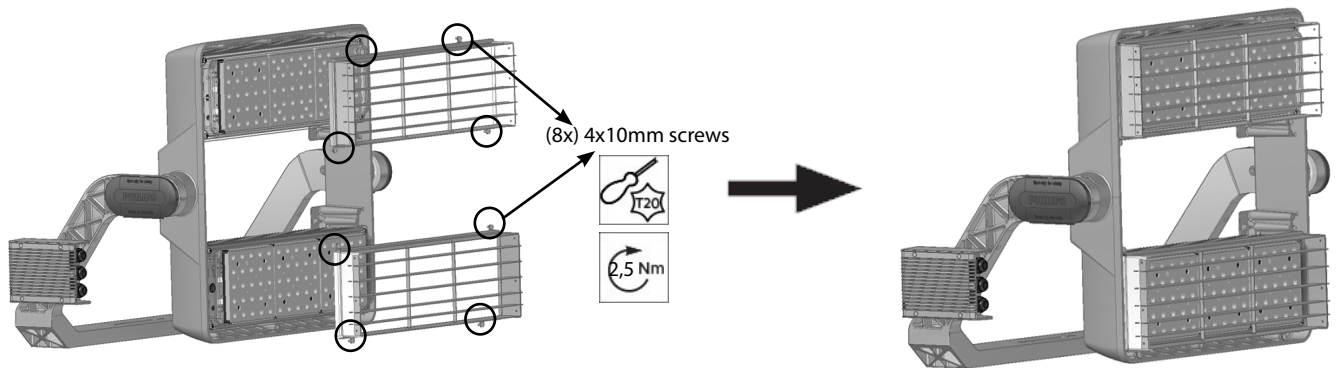


12NC: 912300022990: ZVP500 L-A90 (2 PCs) Ext. zero candela louvre
 12NC: 912300022989: ZVP500 L (2 PCs) External spill-light control louvre

PRECISION AIMING DEVICE

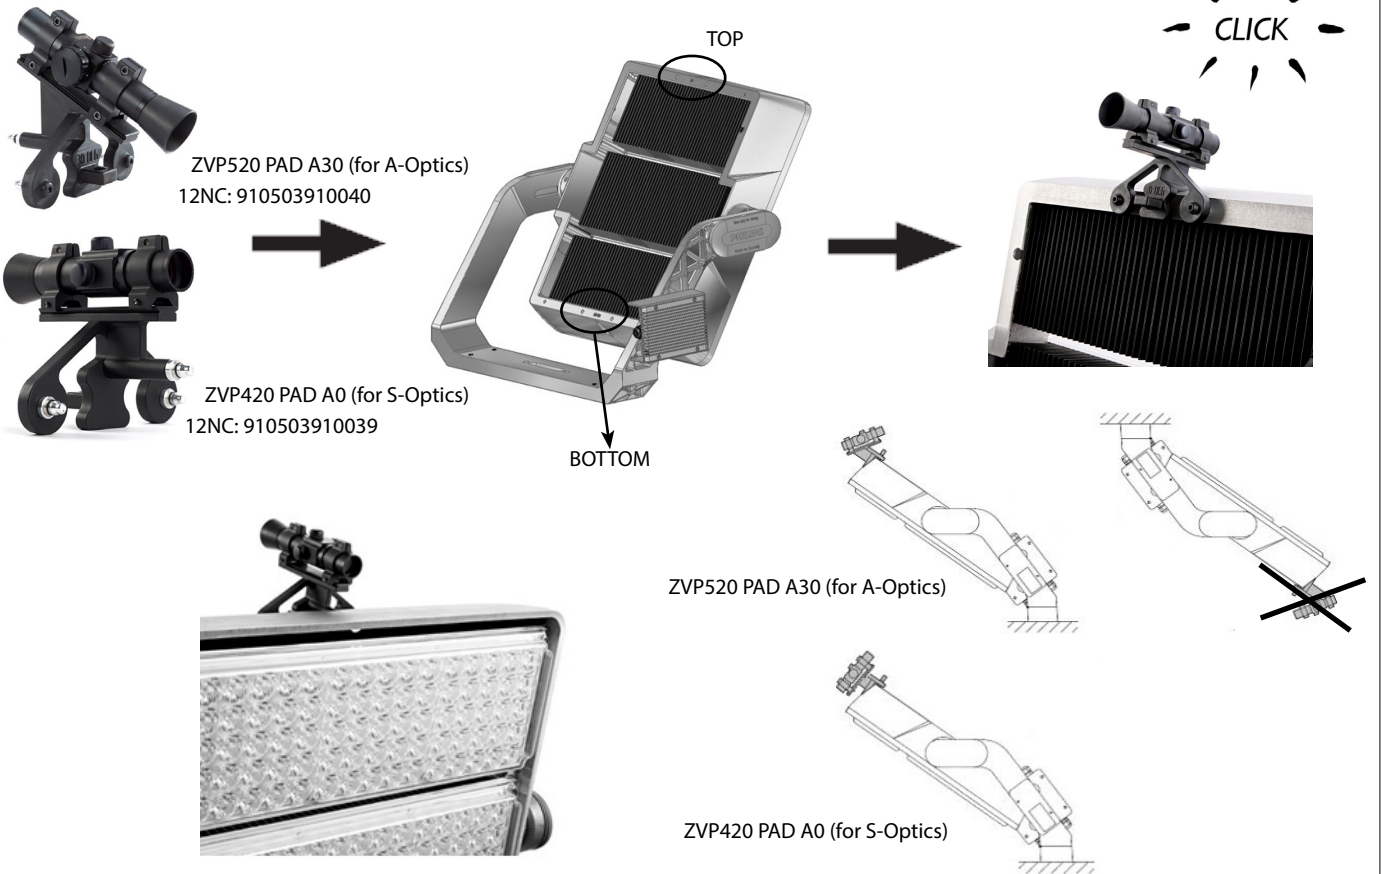

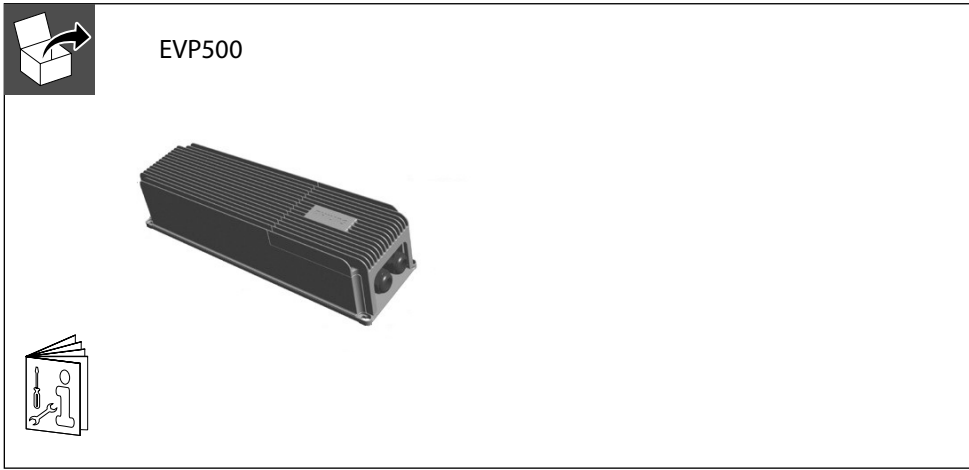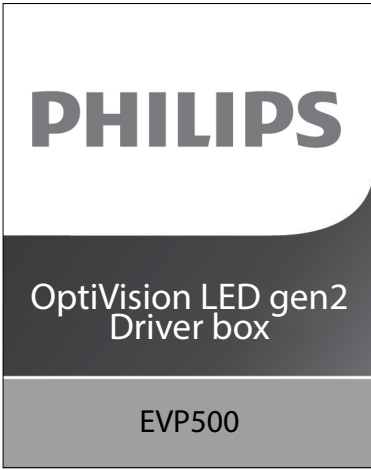

6

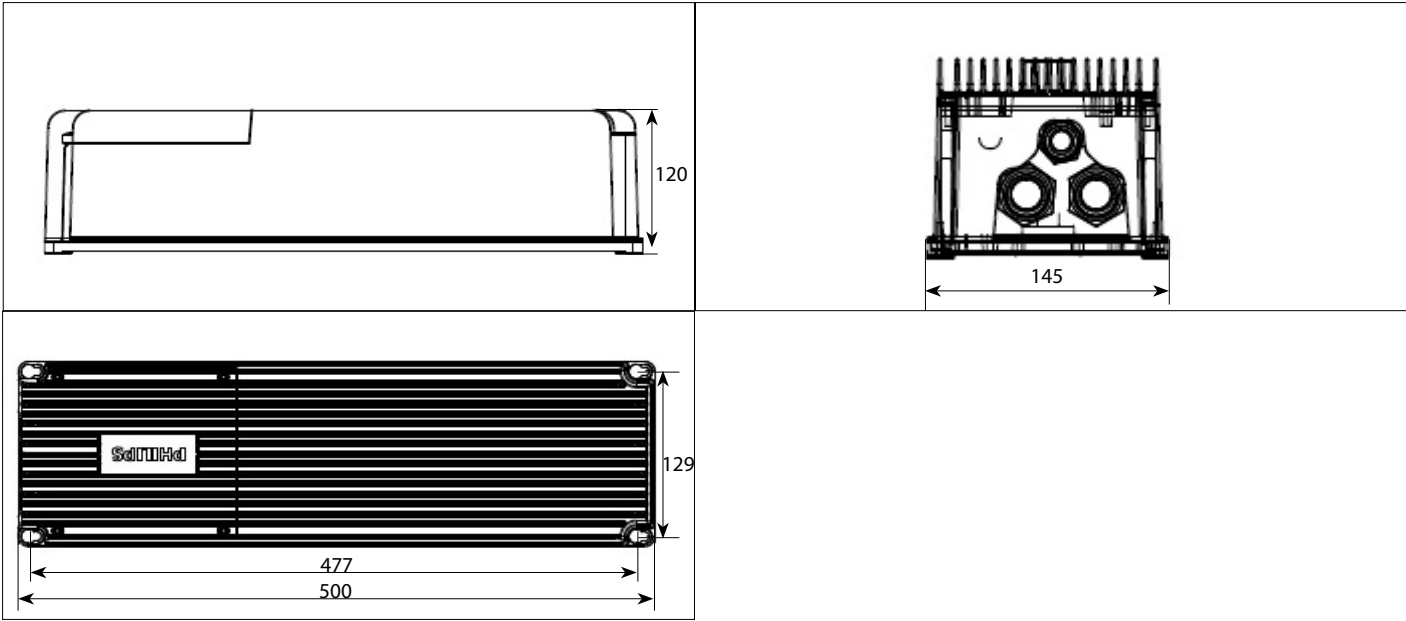

Driver box Features


Iin (Mains 220V-240V)	8A
Iin (Mains 380V-400V)	4.6A
Inrush (220V-240V)	20 A during 160 µs
Inrush (380V-400V)	30 A during 160 µs
Power Factor	> 0.95 at full power
Surge Protection	10kV Com. Mode 6kV Dif. Mode
Maximum Heat Disipation*	75W

* According to the maximum heat disipation, a thermal study should be done for a cabinet installation







Distances between driver and luminaire

L<50	page 9
50<L<200	page 11

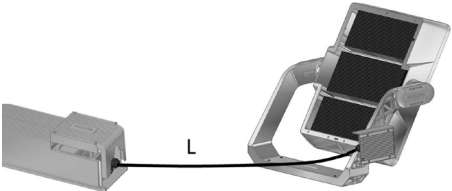




ELECTRICAL CONNECTION L<50m

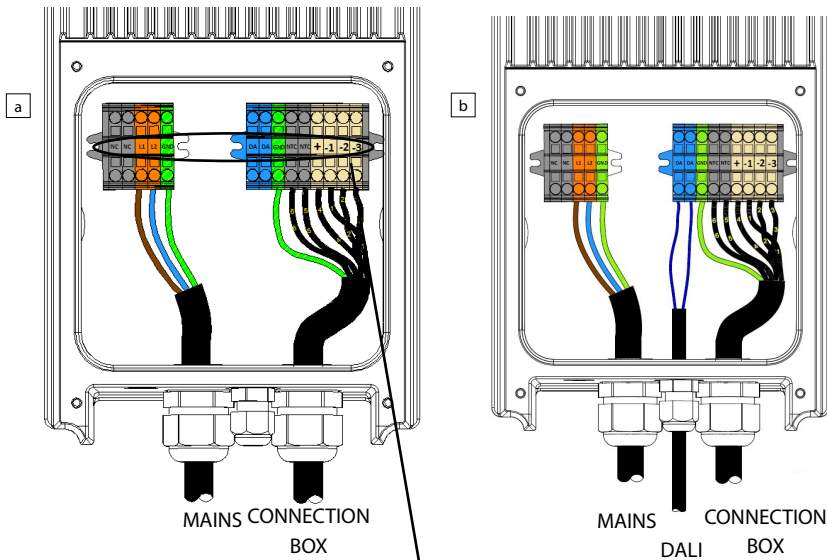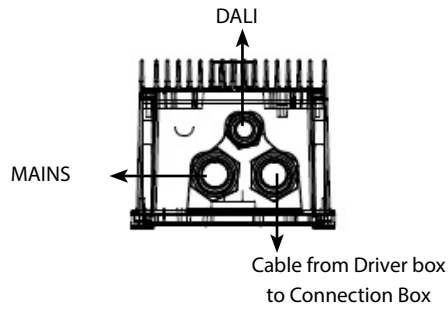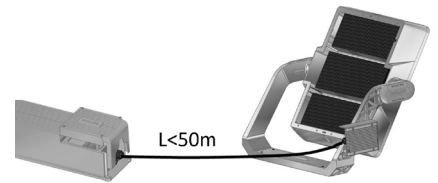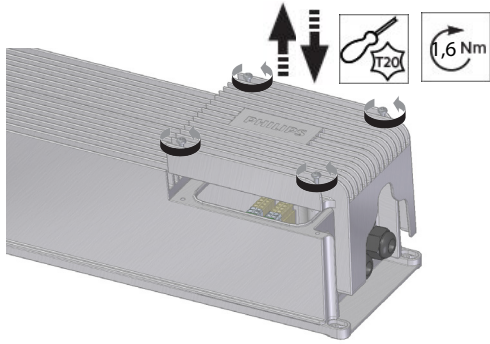

220-240V	380-400V
NC=No connect	NC=No connect
L1=L	L1
L2=N	L2
GND=Ground	GND=Ground



From monophasic to multiphasic (bi/tri) no need to change anything in the driver

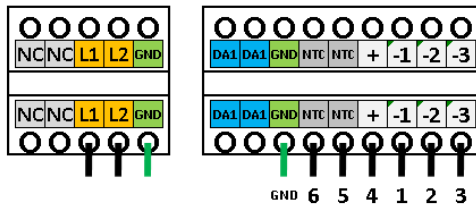


		Ø min (mm)	Ø max (mm)	TORQUE	MAX VOLTAGE SUPPORTED	RECOMMENDED CABLE TYPE	CONNECTOR SECTION MAX
DALI Cable	M20	Ø6	Ø12	3 Nm	1000 V	H05VV-F (3182-Y) 2 core x 1.5mm or H05VV-F (3182-Y) 2 core x 2.5mm	2.5 mm ²
MAINS Cable	M25	Ø13	Ø18	5 Nm	1000 V	H07RN-F 450V/750V	4 mm ²
Connection Box	M25	Ø13	Ø18	8 Nm	1000 V	H07RN-F 450V/750 or A11VV U-600/1000V	2.5 mm ²





WIRING CONNECTION BOX L<50m

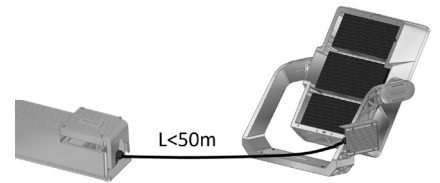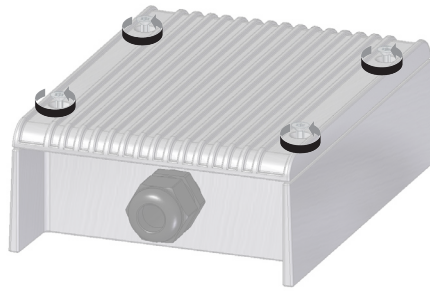

BVP515

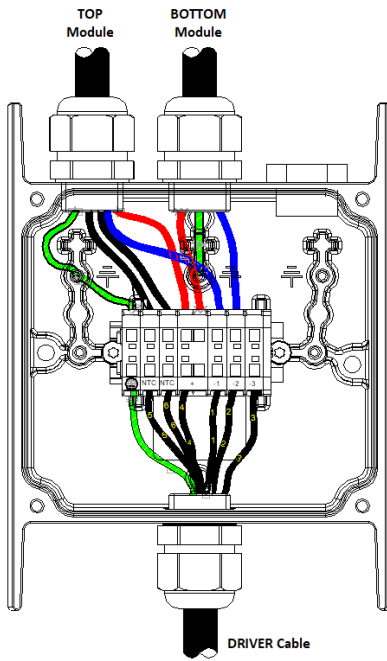

BVP525

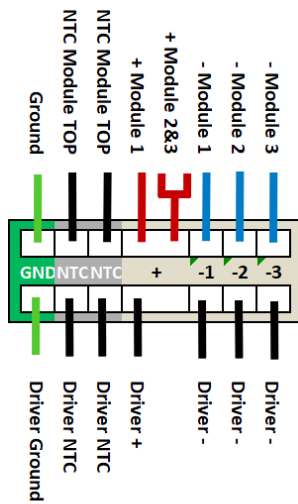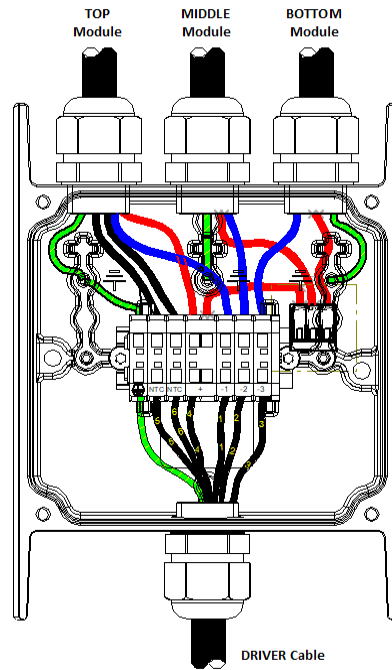

		CABLE DIAMETER RANGE	MAX VOLTAGE SUPPORTED	RECOMMENDED CABLE TYPE
L<25m	7G1.5	Ø13-Ø18	1000 V	H07RN-F 450V/750 or A11VV U-600/1000V
L<50m	7G2.5	Ø13-Ø18	1000 V	H07RN-F 450V/750 or A11VV U-600/1000V
50m<L<200m	8G2.5	Ø13-Ø18	1000 V	H07RN-F 450V/750 or A11VV U-600/1000V



CABLE NOT SUPPLIED BY PHILIPS IN VERSION BV


DRIVER

		Ø min	Ø max	TORQUE
Cables to Modules	M20	Ø10	Ø14	3 Nm
Cable to Driver box	M25	Ø13	Ø18	5 Nm








ELECTRICAL CONNECTION 50m<L<200m

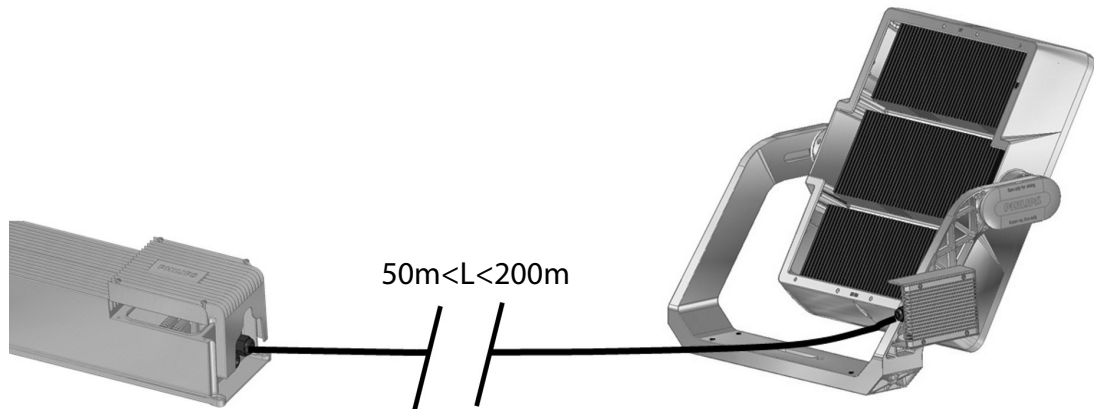

CABLE NOT SUPPLIED BY PHILIPS IN VERSION BV
8G2,5 mm² cable

DRIVER

LUMINAIRE

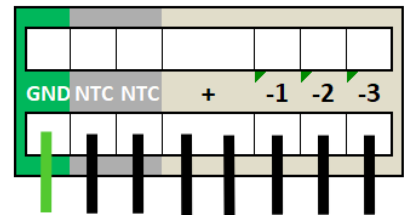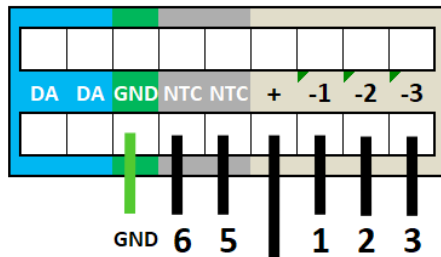

220-240V	380-400V
NC=No connect	NC=No connect
L1=L	L1
L2=N	L2
GND=Ground	GND=Ground
<i>From monophasic to multiphasic (bi/tri) no need to change anything in the driver</i>	



50m < L < 200m
Cable 8 x 2,5mm²



3-POLE TERMINAL BLOCK NOT SUPPLIED BY PHILIPS






Installation of drivers boxes on cabinet

ORIENTATION


Each driver box in the cabinet has to be in vertical position

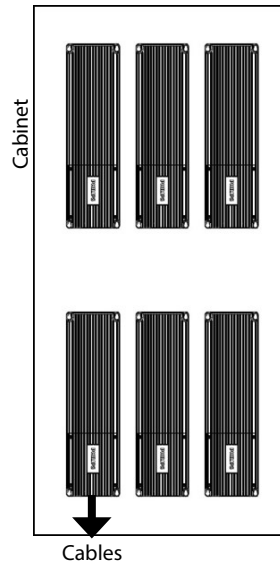

DISTANCES

The distances between driver boxes or wall have to be higher than:

Item	Distance
1, 3	Min 50mm
2	Min 80mm
4	Min 150mm
5	Min 200mm

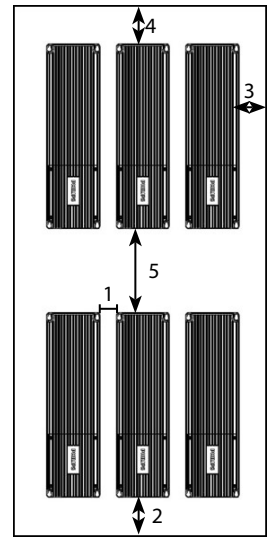


TEMPERATURES

MAXIMUM Relative Humidity:
95% -> Storage & Transport
90% -> Operating (no condensation allowed)


A temperature sensor must be installed inside the cabinet between two driver boxes.
The temperature measured by the sensor has to be lower than 45°C.
We recommend a cabinet protected against solar action.

An active cooling can be added in the cabinet to guarantee a maximum temperature of 45°C all along the year

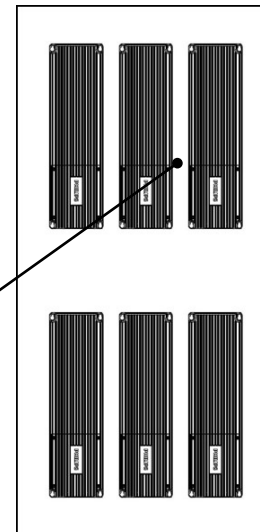




Installation of driver boxes in the mast

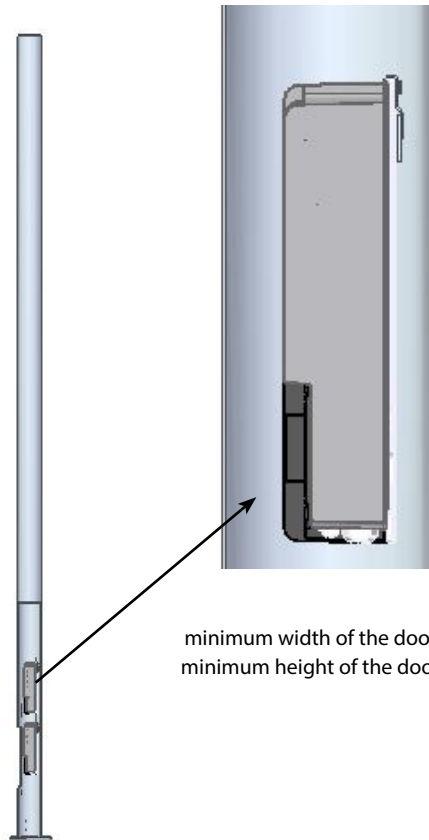


minimum width of the door: 125mm
minimum height of the door: 600mm

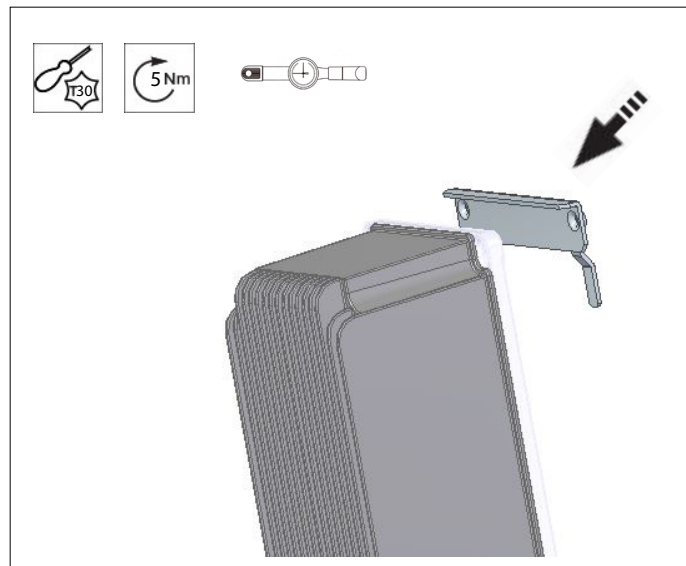


Depending of the driver fixation in the mast, please select the most suitable hook.



Installation of driver boxes on the bracket or in horizontal position

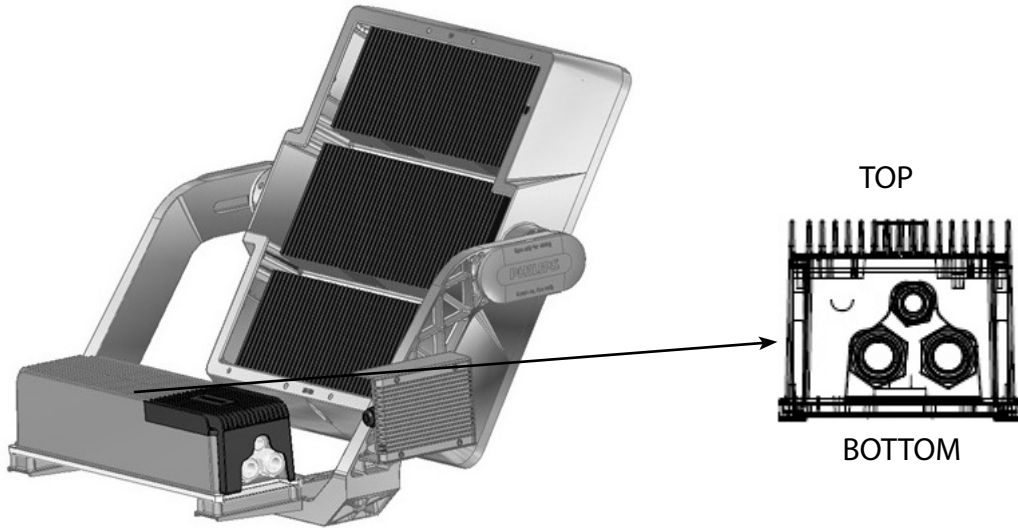

Breathers cannot be exposed directly to water

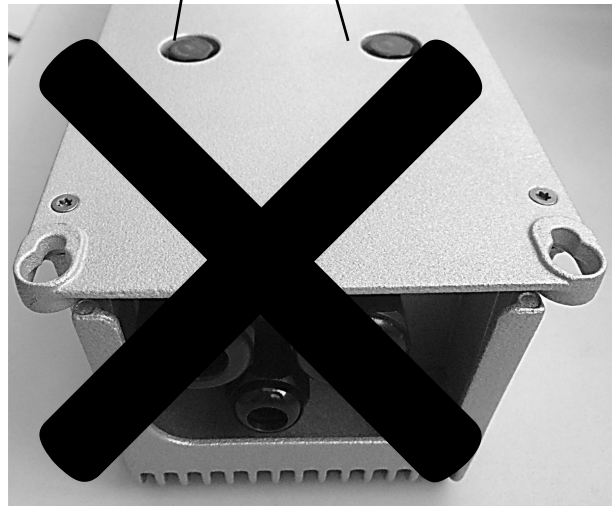



Maximum number of luminaires to be connected to standard circuit breakers (fuse)

BVP515	Mains voltage	Max Nr luminaires connected
MCB 16A A type	220V-240V	2
MCB 16A B type	220V-240V	2
MCB 32A A type	220V-240V	5
MCB 32A B type	220V-240V	5
MCB 16A A type	380V-400V	5
MCB 16A B type	380V-400V	5

BVP525	Mains voltage	Max Nr luminaires connected
MCB 16A A type	220V-240V	1
MCB 16A B type	220V-240V	1
MCB 32A A type	220V-240V	3
MCB 32A B type	220V-240V	3
MCB 16A A type	380V-400V	3
MCB 16A B type	380V-400V	3



© 2016 Philips Lighting Holding B.V.

All rights reserved. Reproduction in whole or in part is prohibited without consent of the copyright owner.

The information presented in this document does not form part of any quotation or contract and is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent or other industrial or intellectual property rights.

Philips Lighting Holding B.V.
The Netherlands