




PHILIPS

Ledinaire Waterproof


WT065C G3

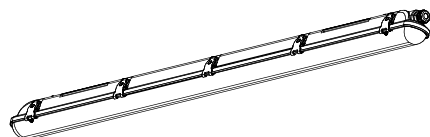

Product Description	CCT(K)	System light output(Lm)	P(W)	Energy Efficiency Class of Light source	Dimensions (mm)		
					L	A	kg
WT065C G3 LED24S/840 PSU L1200 ELR BN	4000	2400	22	D	1207	660-880	1.1
WT065C G3 LED48S/840 PSU L1200 ELR BN		4800	44	D	1207	660-880	1.12
WT065C G3 LED35S/840 PSU L1500 ELR BN		3500	31	D	1507	960-1160	1.28
WT065C G3 LED68S/840 PSU L1500 ELR BN		6800	53	C	1507	960-1160	1.32
WT065C G3 LED74S/840 PSU L1500 ELR BN		7400	54	C	1507	960-1160	1.35

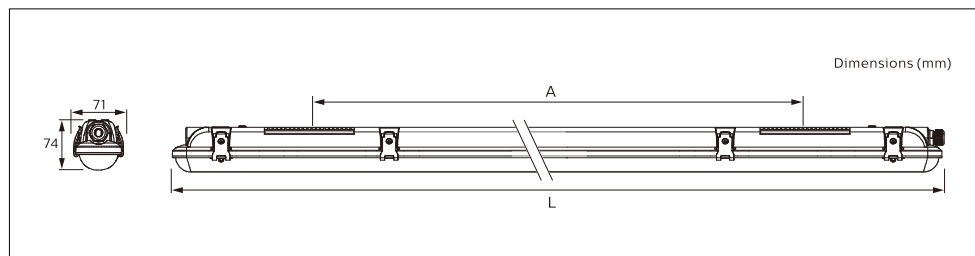

Inrush current

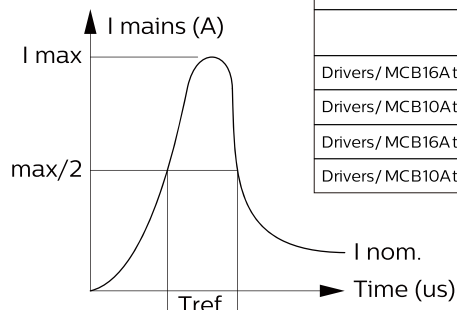

	LED24S	LED48S	LED35S	LED68S	LED74S
I _{max}	15.8	18.6	15.8	17.2	17.2
T _{ref} [μs]	175	153	175	172	172
Max. Nr of products					
Drivers/ MCB16A type B [max.]	50	36	50	31	31
Drivers/ MCB10A type B [max.]	32	23	32	20	20
Drivers/ MCB16A type C [max.]	85	61	85	53	53
Drivers/ MCB10A type C [max.]	52	37	52	32	32


-The luminaire shall be installed by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

-Do not store/install/use the luminaire in corrosive environment with hazardous substances, e.g., sulphur, chlorine, phthalates etc., or on the location where it is exposed to conductive dust, heavily grease (esp. mineral oil or distillates, e.g., petroleum), heavily naphthenic treated with hydrogen.

-This product is not suitable for cold & humid storage areas, especially where obvious temperature gradients are present, such as ventilation opening, door, etc.


-Do not install the luminaire on the location where it is exposed to direct sunlight. UV radiation will damage the material over time, resulting in loss of waterproof sealing and IP65 rating.

-Do not stare into LED light beam.



ATTENTION
OBSERVE PRECAUTIONS
FOR HANDLING
ELECTROSTATIC
SENSITIVE
DEVICES


Non emergency wiring 1-1: Surface Mounted

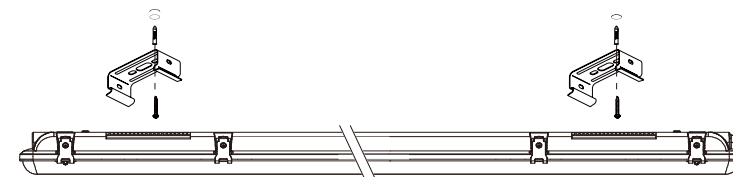

Ø6mm





1-2: Luminaire opening

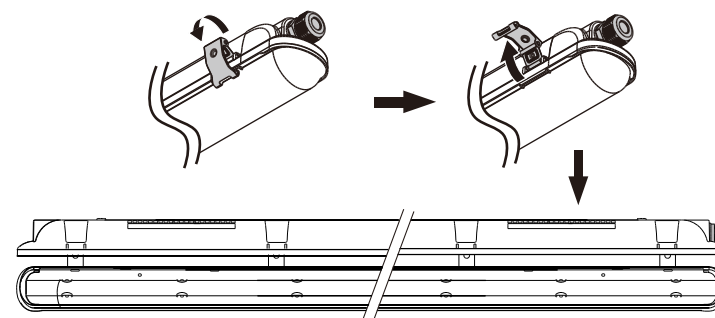


1-3: Wiring from the side

Min. 3×1,0mm²
Max. 3×2,5mm²
Ø7-Ø10mm

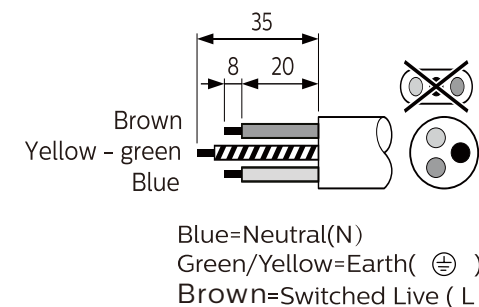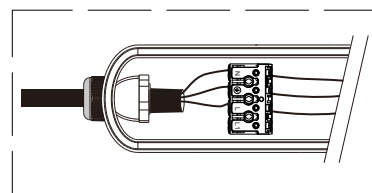


2-1: Emergency wiring


A Luminaire opening



C Emergency LED installation



B Emergency installation

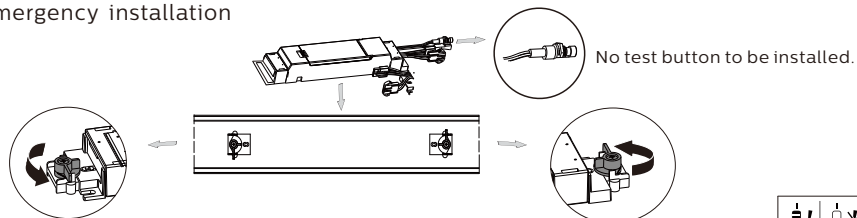

2-2: (option with additional emergency module EM300V)

Emergency Module:
Follow manual instruction of EM300V
Order Code: 912401483460
EM300V ELP3 kit HV 6.4V 2000mAh LFP
The emergency pack is not provided.







3 Log book




No tie wrap

2

1 Date of

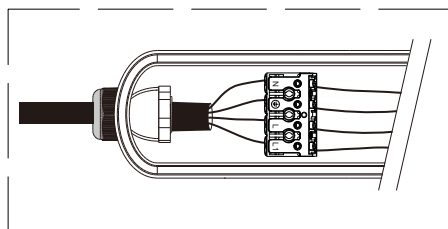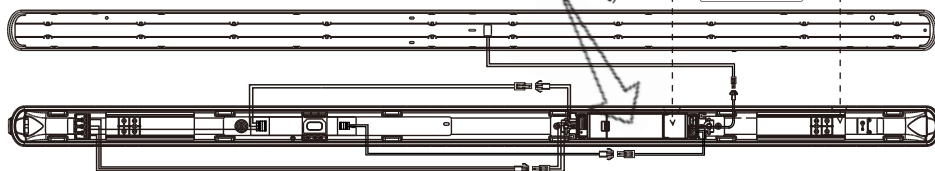


2-3:

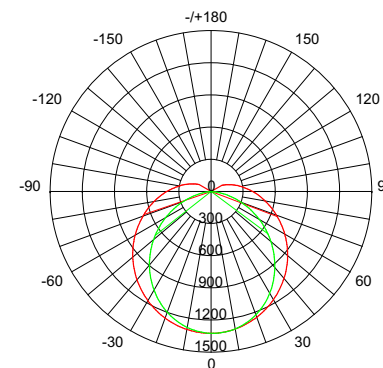

Rated lumen output in emergency mode: min 280lm

3: TW Optional

Warning/note! emergency wiring
Through wiring cannot be combined
with EM pack installation.

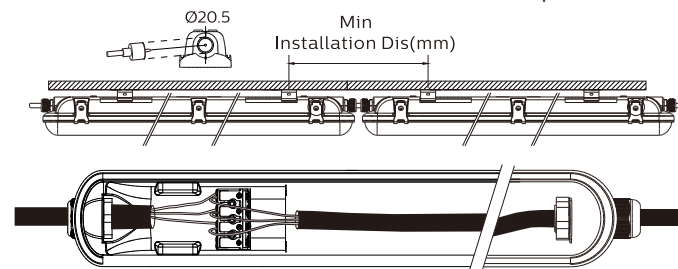

Type	Min installation distance(mm)
L1200	330
L1500	360



4: Close the luminaire

