

Fail-Safe

DESCRIPTION

The Fail-Safe Harmony VR Linear provides exceptional aesthetics with remarkable strength. A wide variety of lamp options and connection configurations offer unmatched versatility for a wide range of applications. Die-Cast end caps, heavy extruded aluminum body provides strength and rigidity for complex environments while an extruded linear ribbed polycarbonate lens obscures the lamp image and spreads light evenly. The Harmony VR Linear is ideal for areas where the need for aesthetics and protection from vandalism are critical. Perfect for schools, hospitals, corridors, dormitories, public restrooms, common areas, and transit stations.

Catalog #		Type
Project		
Comments		Date
Prepared by		

SPECIFICATION FEATURES

Housing

Heavy duty extruded aluminum rails and die-cast end caps provide rigid construction. Smooth end caps provided with internal 7/8" knockouts. Finished in white standard. Optional architectural colors available.

Fasteners

Stainless steel TORX® with center reject pin and allen head set screws provided. Screw heads are side mounted and concealed under lens.

Lens

One-piece, extruded UV stabilized polycarbonate. Unique linear ribbed design provides even light distribution while obscuring lamp image and direct glare. Internal ribs reduce dirt build-up and make cleaning easier.

Reflector

20 ga. CRS with white high reflectance polyester powder coat finish. Reflector serves as ballast and wireway cover.

Lamps

By others.

Ballast

Ballasts are CBM/ETL Class "P" and positively secured to housing.

Socket

Pressure lock lampholders.

Labels

UL/cUL listed for wet locations under covered ceiling, surface mount. Damp location standard for all other mountings. IP64 optional.



HVL8

8" Continuous

Harmony

T5

T8

Fluorescent

Vandal Resistant

Linear


Polycarbonate

Clear Linear Ribbed or Smooth

Opal

HARMONY™
Vandal Resistant

END DIMENSIONS

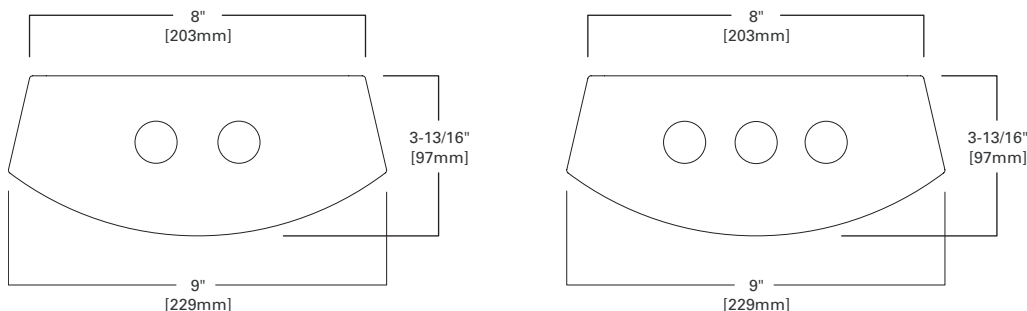

TORX® is a registered trademark of Camcar Division of Textron Inc.

ENERGY DATA

For Energy Management related technical data to support the performance of this fixture series, refer to the ordering information for input wattage.

ORDERING INFORMATION

SAMPLE NUMBER: HVL8BR-332-120V-O-EB82-D


Product Family	Row/Node Configuration	Lamp Type	Voltage	Lens Type	Ballast	End Caps	Options	Finish	Accessories (Order Separately)
HVL8 =Harmony VR Linear 8" Width 2' & 4' Length 8THVL8 =Harmony VR Linear 8" Width 8' Length BR =Beginning of run MR =Middle of run ER =End of run		Lamp Type 2' Length 114 =(1) 14W T5 Lamp 214 =(2) 14W T5 Lamps 314 =(3) 14W T5 Lamps 124 =(1) 24W T5HO Lamp 224 =(2) 24W T5HO Lamps 117 =(1) 17W T8 Lamp 217 =(2) 17W T8 Lamps 317 =(3) 17W T8 Lamps 4' Length 128 =(1) 28W T5 Lamp 228 =(2) 28W T5 Lamps 328 =(3) 28W T5 Lamps 154 =(1) 54W T5HO Lamp 254 =(2) 54W T5HO Lamps 132 =(1) 32W T8 Lamp 232 =(2) 32W T8 Lamps 332 =(3) 32W T8 Lamps 8' Length 128 =(1) 28W T5 Lamp 228 =(2) 28W T5 Lamps 328 =(3) 28W T5 Lamps 154 =(1) 54W T5HO Lamp 254 =(2) 54W T5HO Lamps 132 =(1) 32W T8 Lamp 232 =(2) 32W T8 Lamps 332 =(3) 32W T8 Lamps	Voltage 120 =120V 277 =277V 347 =347V UNV =120-277V UNC =347-480V	Lens Type C =Clear Linear Ribbed (smooth on outside) O Opal Smooth (no ribs)	Electronic Ballast EB81 =(1) Ballast for use with T8 lamp EB82 =(2) Ballasts for use with T8 lamp EB83 =(3) Ballast for use with T8 lamp EB84 =(4) Ballasts for use with T8 lamp EB51 =(1) Ballast for use with T5 lamp EB52 =(2) Ballasts for use with T5 lamp EB53 =(3) Ballasts for use with T5 lamp EB54 =(4) Ballasts for use with T5 lamp	Blank =No End Caps (Middle of run Units) D =Decorative End Caps, Sculpted S =Smooth End Caps, Flat	Blank =Architectural White BK =Architectural Black DP =Dark Platinum	VRSD =T20 Center Pin Tamperproof TORX®-head bit	
Notes: 1 Must specify voltage. 2 Stems must be ordered separately. 4 Standard EBP is low-profile (1.18" height). For larger profile EBP, wireway cover size is increased to fit over the EBP which causes a noticeable shadow/dark spot when fixture is illuminated. Lamps are off-center to accommodate the larger size EBP. Consult factory for details. 5 FNL not available with 3-lamp cross-section. 6 Not available in 3-lamp cross-section. 7 Consult factory for additional configurations. 8 Black conductor connected to outboard lamp - default at factory with inboard/outboard wiring. 9 Connected to all ballasts on fixture. Consult factory for other OS/lamp configurations. 10 2-lamp cross-section maximum. 11 IP64 not available with PM option. 12 Only available with PM option.									
ORDERING INFORMATION EXAMPLE: (3) 8' FIXTURES, 24' RUN (1) 8THVL8BR-232-UNV-C-EB82-S (1) 8THVL8MR-232-UNV-C-EB82-S (1) 8THVL8ER-232-UNV-C-EB82-S									

SIDE DIMENSIONS


Consult factory for 8' dimensions.

SMOOTH END CAPS

2' BEGINNING AND END UNITS




4' & 8' BEGINNING AND END UNITS




DECORATIVE END CAPS

2' BEGINNING AND END UNITS




4' & 8' BEGINNING AND END UNITS




JOINER BANDS

2' MIDDLE UNITS



4' & 8' MIDDLE UNITS



CONNECTORS AND ACCESSORIES

8" CORNER MOUNT BRACKET ¹**HVL8-2T5CM** = 8", 2Ft. T5 Corner Mount**HVL8-2T8CM** = 8", 2Ft. T8 Corner Mount**HVL8-2LEDCM** = 8", 2Ft. LED Corner Mount**HVL8-4T5CM** = 8", 4Ft. T5 Corner Mount**HVL8-4T8CM** = 8", 4Ft. T8 Corner Mount**HVL8-4LEDCM** = 8", 4Ft. LED Corner Mount**Note:** ¹ Requires 90-degree offset 1/4" driver and VRSB bit for installation.**12" CORNER MOUNT BRACKET ¹****HVL12-2T5CM** = 12", 2Ft. T5 Corner Mount**HVL12-2T8CM** = 12", 2Ft. T8 Corner Mount**HVL12-2LEDCM** = 12", 2Ft. LED Corner Mount**HVL12-4T5CM** = 12", 4Ft. T5 Corner Mount**HVL12-4T8CM** = 12", 4Ft. T8 Corner Mount**HVL12-4LEDCM** = 12", 4Ft. LED Corner Mount**Note:** ¹ Requires 90-degree offset 1/4" driver and VRSB bit for installation.**PENDANT MOUNT: Suspension Sets - Stem Sets****XX** = Length (6, 8, 12, 24, 36, 48, 60, 72)**SCF-XX-B** = Fixed Stem Set

Used with all surface fixtures as stem sets. One set consists of one stem assembly. Minimum of two sets required per fixture. Not rated WL under covered ceiling.

NOTE: Coupler, 3/8" IPS Pipe Coupler to join lengths. Coupler is standard baked white enamel or special order of black. Must specify pendant mount (PM) option on luminaire.**Lifetime Warranty**

Fail-Safe will repair or provide a replacement fixture for any VR architectural luminaire found to be inoperative due to physical abuse for the duration of the installation. ** This includes all VR polycarbonate lens luminaires. This warranty is only valid to proper installation of the luminaire, using the four-point mounting method for all luminaires. Furthermore, Fail-Safe cannot warranty product against some forms of anti-social human behavior involving corrosive chemicals, fire, paint or gunfire.

** To make a claim, contact your Cooper Lighting Solutions Agent to arrange an RMA (Return Material Authorization) for the claimed product. Upon receipt and verification of the defect, Cooper Lighting Solutions will return to you a repaired or, at Cooper Lighting Solutions' sole option, replacement fixture.