




# LIGHTOLIER

by @signify

## Downlighting

Lytecaster CFL 5"

1076 Basic Baffle Trim

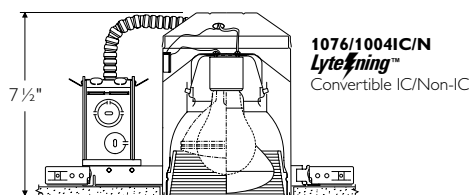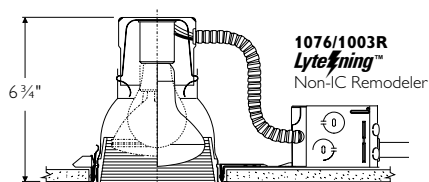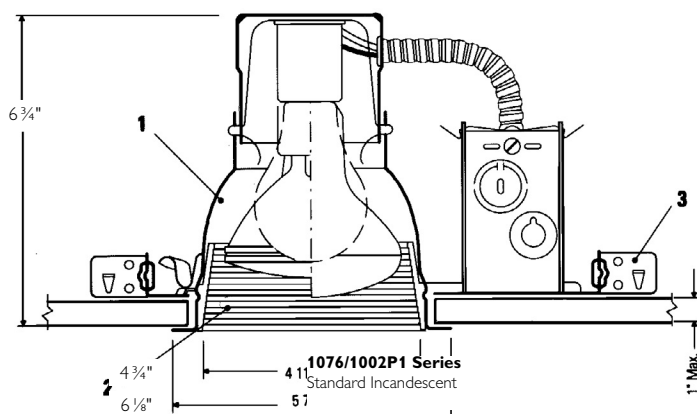

Project: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Cat.No: \_\_\_\_\_  
 Type: \_\_\_\_\_  
 Lamps: \_\_\_\_\_ Qty: \_\_\_\_\_  
 Notes: \_\_\_\_\_

Complete Fixture consists of Reflector Trim & Frame-In Kit. Select each separately. See Individual Frame-In Kit specification sheets for more information.


Reflector Trim	LED Frame-In Kit				Fluorescent Frame-In Kit			
	Frame-In Kit	Installation Type	Lamping	Height	Frame-In Kit	Installation Type	Lamping	Height
<b>1076</b> Matte Black  <b>1076WH</b> Gloss White	<b>1001LED</b> <b>1001LEDEM</b> <b>1001LEDREM</b> <b>L56LED</b>	Non-IC Non-IC EM Non-IC Remodeler Non-IC Retrofit	LED LED LED LED	6 3/4" 6 3/4" 6 3/4" 6 3/4"	<b>1001F13U Series</b>	UniFrame™ Non-IC	(1) Triple 13W (GX24q-1)	5 7/8"
	<b>Incandescent Frame-In Kit</b>				<b>1001F18U Series</b>	UniFrame™ Non-IC	(1) Triple 18W (GX24q-2)	5 7/8"
	Frame-In Kit	Installation Type	Lamping	Height	<b>1004F13 Series</b>	IC	(1) Quad/Triple 13W (GX24q-2)	7 1/2"
	<b>1000P1</b> <b>1002P1</b>	Non-IC	60W A19 75W PAR30* 75W BR30	6 3/4"	<b>1004F18** Series</b>	IC	(1) Quad/Triple 18W (GX24q-2)	7 1/2"
	<b>1003R</b>	Non-IC Remodeler	60W A19 75W PAR30* 85W BR30	6 3/4"	<b>1004F26** Series</b>	IC	(1) Quad/Triple 26W (GX24q-2)	7 1/2"
	<b>1000IC</b> <b>1000AICM</b>	IC IC AirSeal®	40W A19 65W BR30 75W PAR30	7 5/16" 7 5/16"	<b>1001F13ICU/N</b>	Performance IC	(1) Triple 13W (GX24q-1)	7 1/4"
	<b>1004ICX/N</b>	IC AirSeal®	40W A19 75W PAR30* 65W BR30	7 1/4"	<b>1001F18ICU/N</b>	Performance IC	(1) Triple 18W (GX24q-2)	7 1/4"
	<b>1004IC/N</b> <b>1004ICR</b>	IC IC Remodeler	50W PAR30 60W BR30	7 1/2" 7 1/2"	*(Use Socket Extender with Short Neck) **Lightolier recommends the use of triple tube lamps			
	<b>1004IC/N</b> <b>1004ICR</b>	Non-IC Non-IC Remodeler	65W BR30 75W PAR30 40W A19	7 1/2" 7 1/2"	<b>All-In-One-Box</b> Product comes with Reflector, Trim and Philips LED BR30 LED Lamps. Frames are sold separately.			
	<b>1004SIC/N</b> <b>1004SICR</b>	IC IC Remodeler	50W PAR30* 60W BR30	5 1/2" 5 1/2"				
	<b>1004SIC/N</b> <b>1004SICR</b>	Non-IC Non-IC Remodeler	75W PAR30* 75W BR30	5 1/2" 5 1/2"				
					<b>1076WHBR30D</b>	<b>1076WHBR30ND</b>		
					Gloss White Baffle c/w Philips BR30 LED Dim Lamp (to be used with Incandescent Frame-In-Kit only).	Gloss White Baffle c/w Philips BR30 LED Non-Dim Lamp (to be used with Incandescent Frame-In-Kit only).		

# 1076 Lytecaster CFL 5"

## Basic Baffle Trim

### Features

- 1. **Reflector:** Hydroformed aluminum, .040" thick (18 ga.): non-yellowing, scratch resistant Perma White finish, 88% reflectance; white trim flange.
- 2. **Step Baffle:** Molded high heat plastic with stepped conical surface for low brightness, matte black or gloss white finish.
- 3. **Frame-In Kit:** (1002P1 standard frame shown). Other frames listed above and shown on the right. See Frame-In Kit specification sheets for more details.

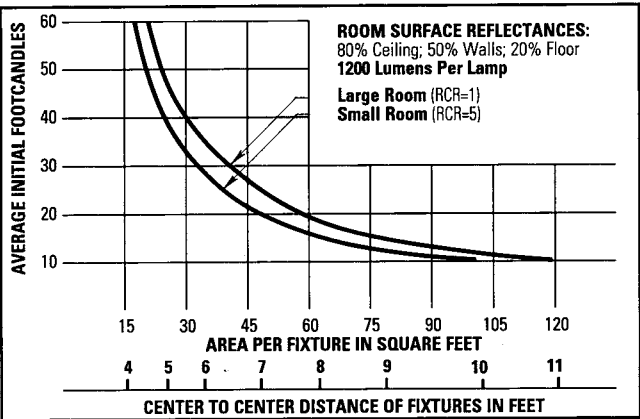

Use quick calculator chart to determine the spacing of 75 Watt PAR30 FL units (Black) for a desired level of illumination. Conversion Factors: 75W PAR30 FL, White, F.C. x 1.1.


### Options & Accessories

#### Medium-Base PAR30 Socket Extender:

1968 - For use w/short neck PAR30 lamps in P1 and Lytening housings.

### Labels

UL (Suitable for Damp Locations), I.B.E.W.

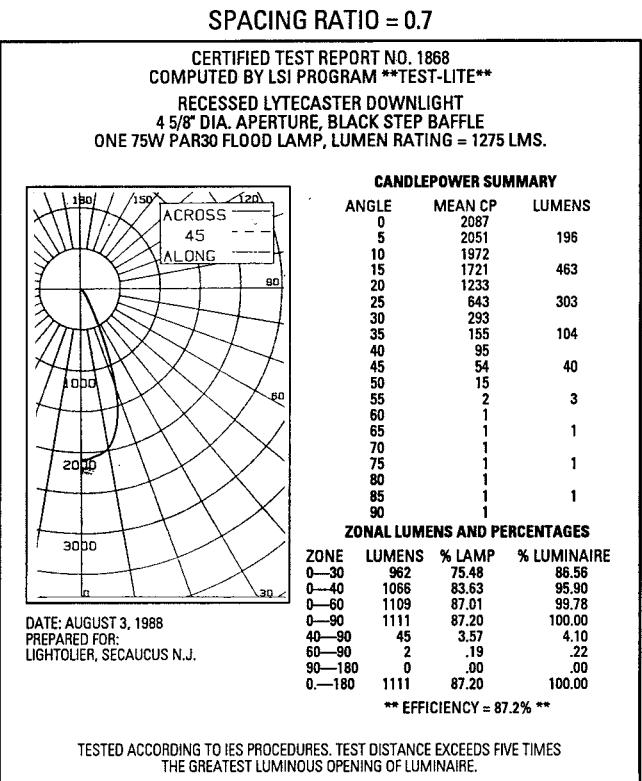

**Conversion Factor: 75W PAR30 FL; White, C.U. x 1.1 65W BR30 FL; Black, C.U. x .75; White, C.U. x 1.0.**

To convert lighting data for a lower wattage incandescent lamp of the **same type**, multiply the footcandle (or candlepower) values by the ratio of the lumens of the two lamps. The coefficients of utilization remain the same.

