



PHILIPS

CoreLine Panel

RC132V/RC133V

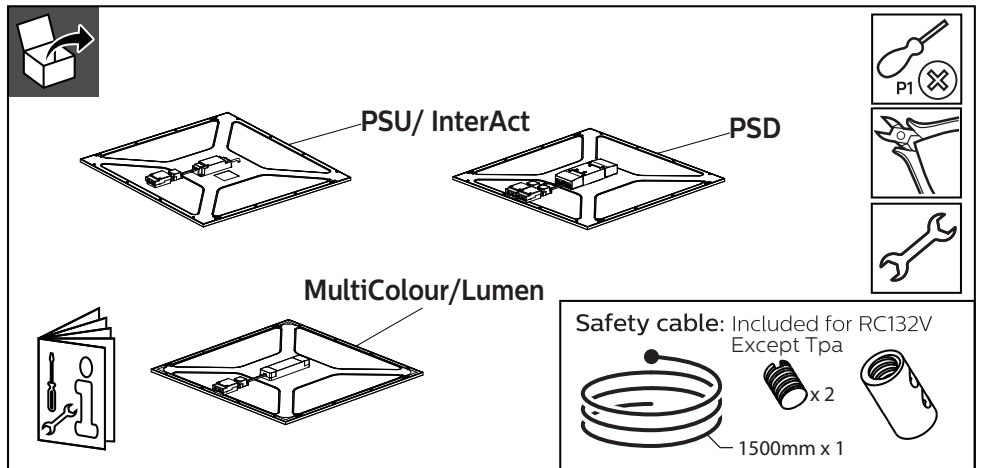

	Lumen (lm)	CCT (K)	P(W)	L xW xH (mm)	kg
RC132V G4 LED365/840 PSU W60L60 NOC	3600	4000	29	595x595	2.80
RC132V G4 LED345/830 PSU W60L60 NOC	3400	3000	29	595x595	2.80
RC132V G4 LED435/840 PSU W60L60 NOC	4300	4000	34.5	595x595	3.10
RC133V G4 LED365/840 PSU W62L62 NOC	3600	4000	29	622x622	3.00
RC133V G4 LED345/830 PSU W62L62 NOC	3400	3000	29	622x622	3.00
RC132V G4 LED365/840 PSU W30L120 NOC	3600	4000	29	1195x295	2.72
RC132V G4 LED365/840 PSU W60L60 OC	3600	4000	29	595x595	2.80
RC132V G4 LED345/830 PSU W60L60 OC	3400	3000	29	595x595	2.80
RC133V G4 LED365/840 PSU W62L62 OC	3600	4000	29	622x622	3.00
RC132V G4 LED365/840 PSU W30L120 OC	3600	4000	29	1195x295	2.72
RC132V G4 LED365/840 PSD W60L60 OC	3600	4000	29	595x595	2.90
RC132V G4 LED345/830 PSD W60L60 OC	3400	3000	29	595x595	2.90
RC132V G4 LED435/840 PSD W60L60 OC	4300	4000	34.5	595x595	3.30
RC133V G4 LED365/840 PSD W62L62 OC	3600	4000	29	622x622	3.10
RC133V G4 LED345/830 PSD W62L62 OC	3400	3000	29	622x622	3.10
RC133V G4 LED435/840 PSD W62L62 OC	4300	4000	34.5	622x622	3.50
RC132V G4 LED365/840 PSD W30L120 OC	3600	4000	29	1195x295	2.90
RC132V G4 LED345/830 PSD W30L120 OC	3400	3000	29	1195x295	2.90
RC132V G4 LED36/840 PSU W60L60 OC TP(a)	3600	4000	29	595x595	2.80
RC132V G4 LED34_435/830_840 PSU W60L60 OC	3400/3600/4000/4300	3000/4000	30/35	595x595	3.15
RC133V G4 LED34_435/830_840 PSU W62L62 OC	3400/3600/4000/4300	3000/4000	30/35	622x622	3.30
RC132V G4 LED34_435/830_840 PSU W30L120 OC	3400/3600/4000/4300	3000/4000	30/35	1195x295	3.18

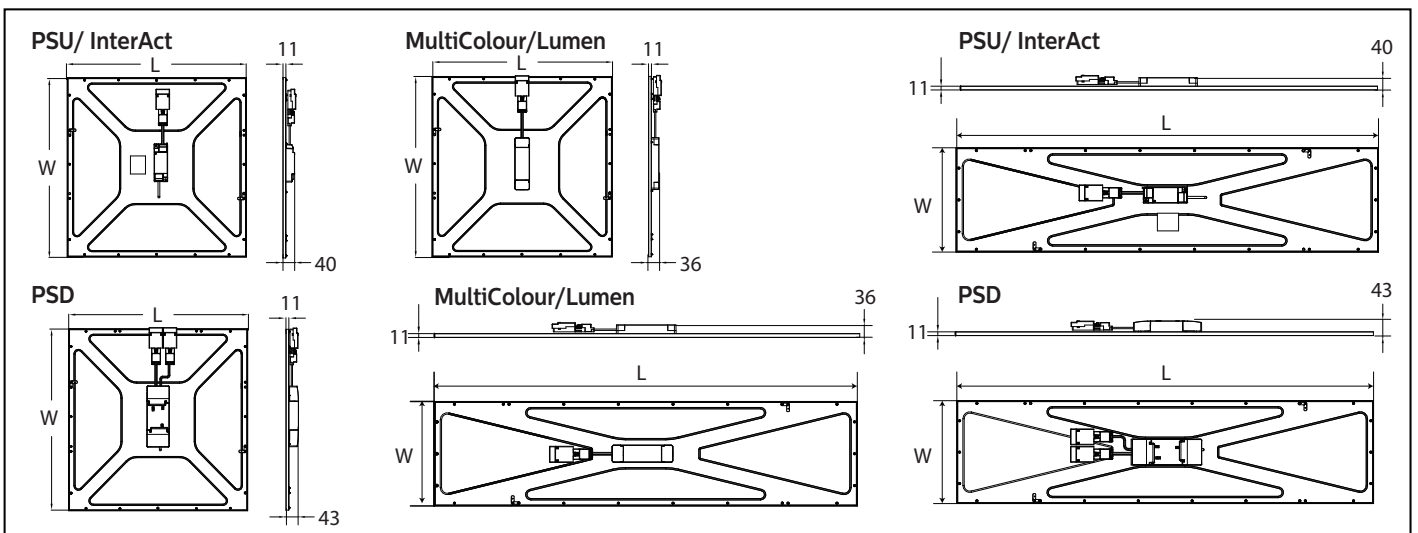


VPC visible profile ceiling 	SP suspended 	SM surface mounted 	PCV plaster ceiling 
---	--	--	---

Optional:


Suspension kit:

911401892280 RC132Z SME-3 WH
911401892380 RC132Z SME-4 WH

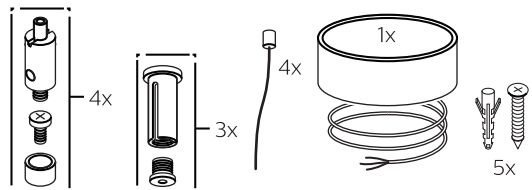


Surface mounted kit:

910930031018 RC132Z SMB W60L60
910930031118 RC132Z SMB W62L62
910930031218 RC132Z SMB W30L120

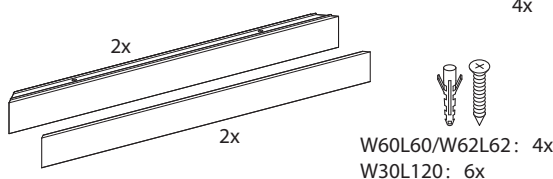



Plaster kit:

911401892180
RC132Z SMB-PLC





Quick-connectors

PSU/InterAct and MultiColour/Lumen

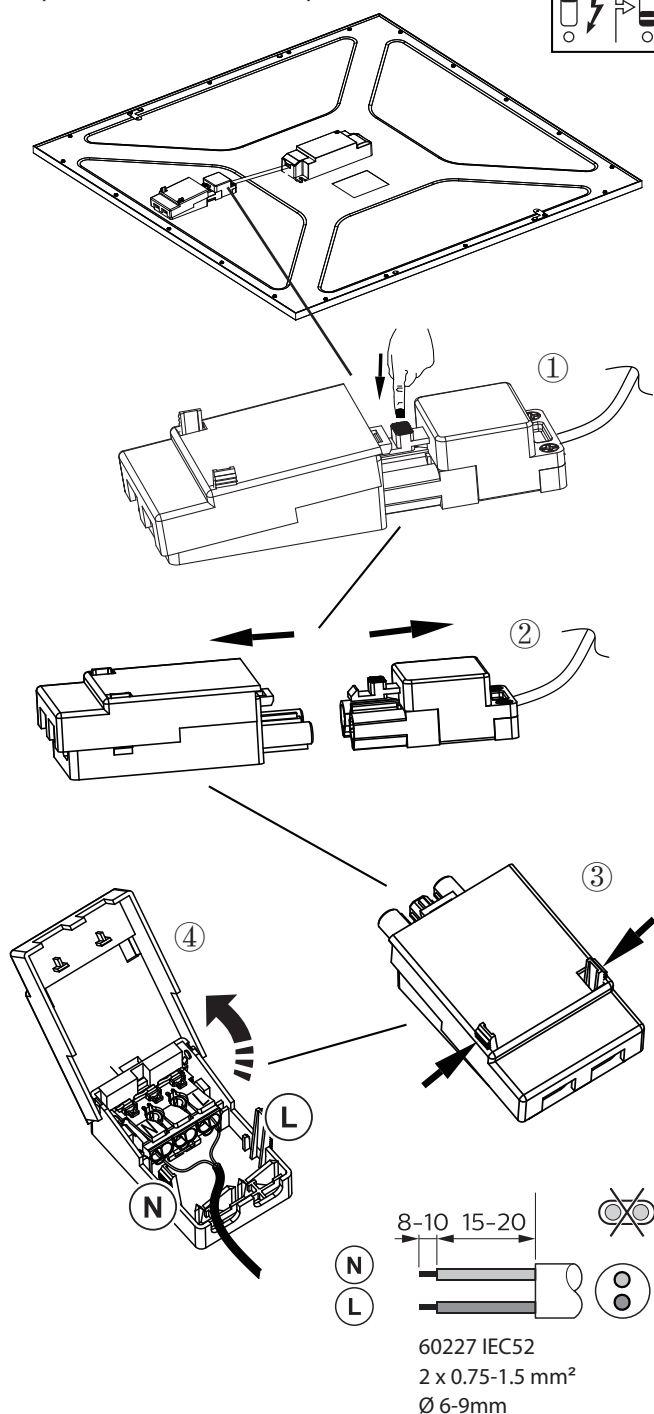


PSD

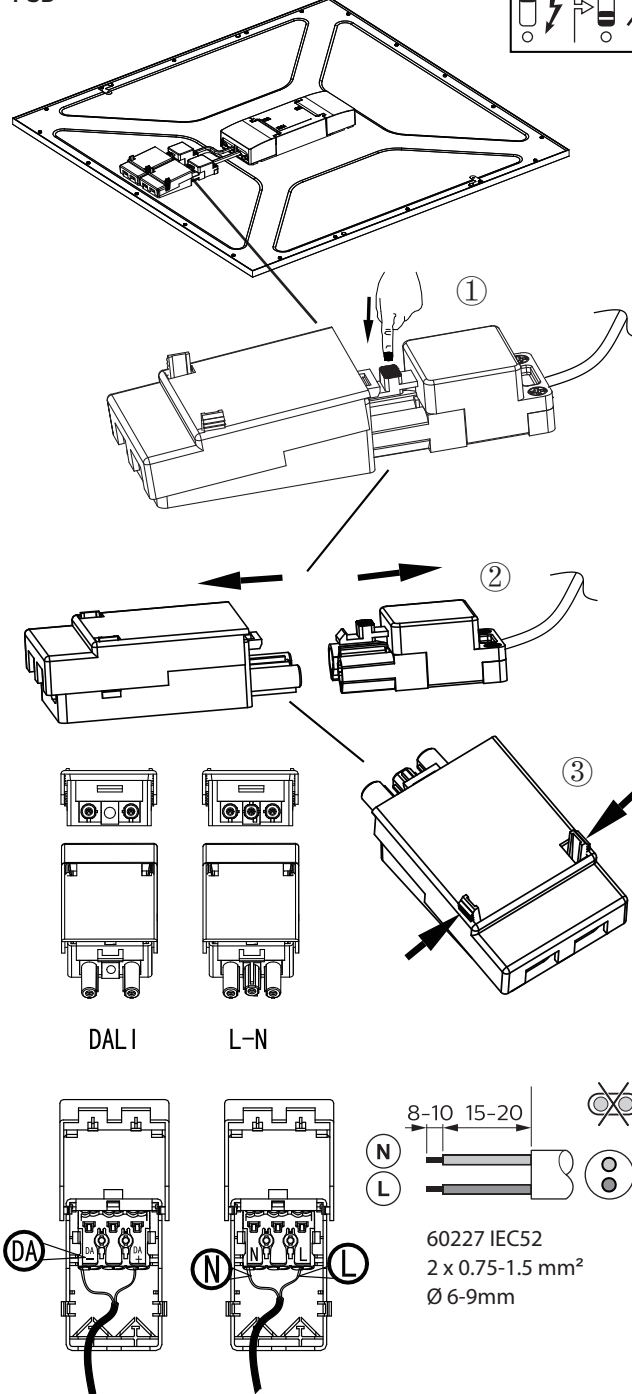




VPC Visible Profile Ceiling



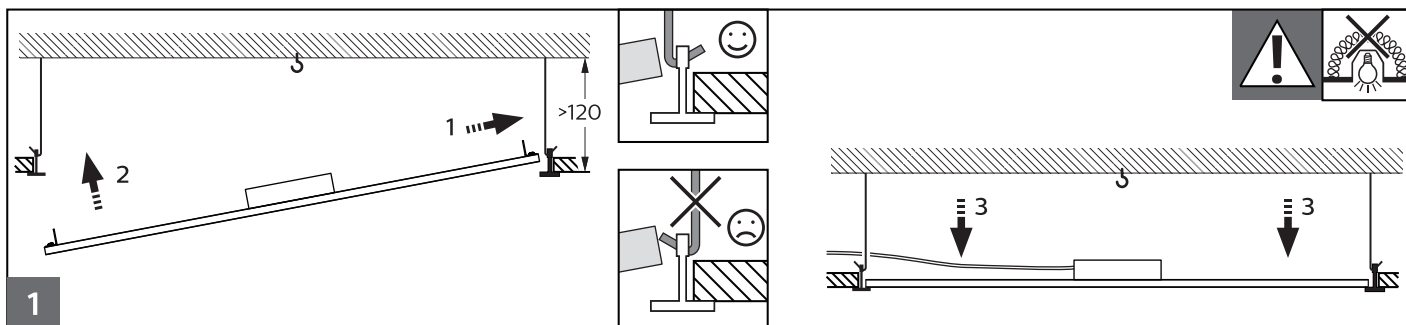


Safety cable

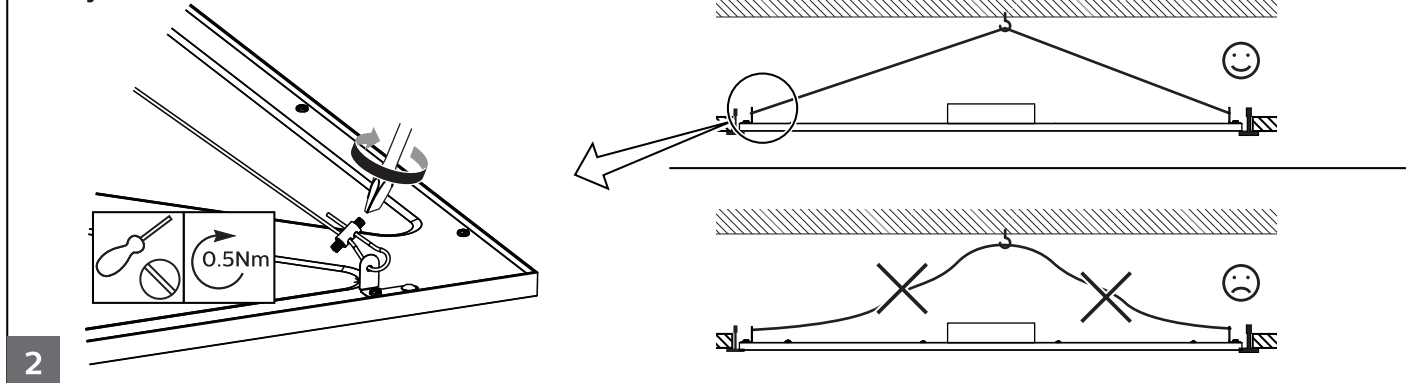

PCV plaster ceiling version



Optional with
911401892180 RC132Z SMB-PLC

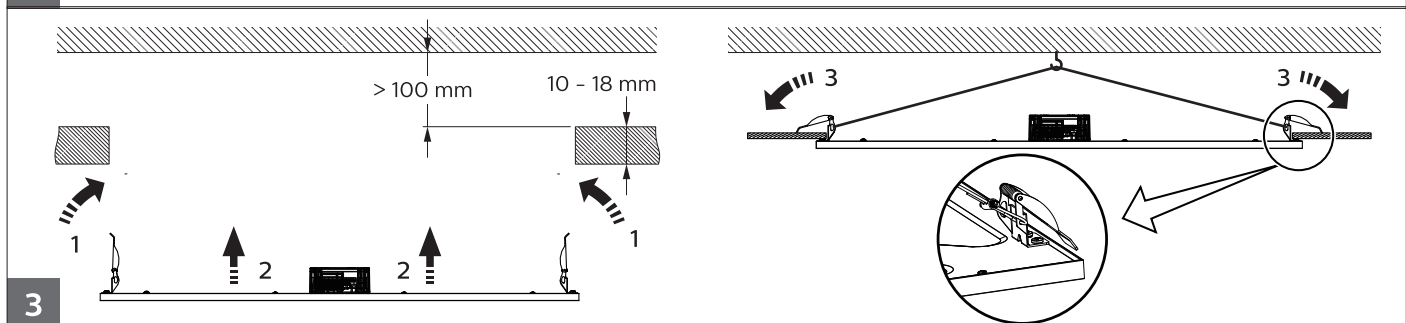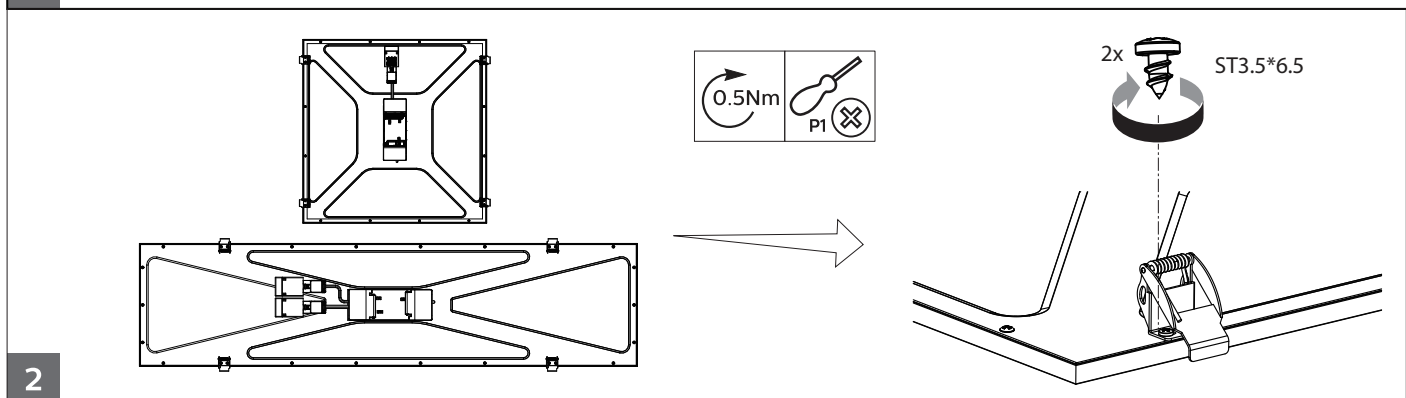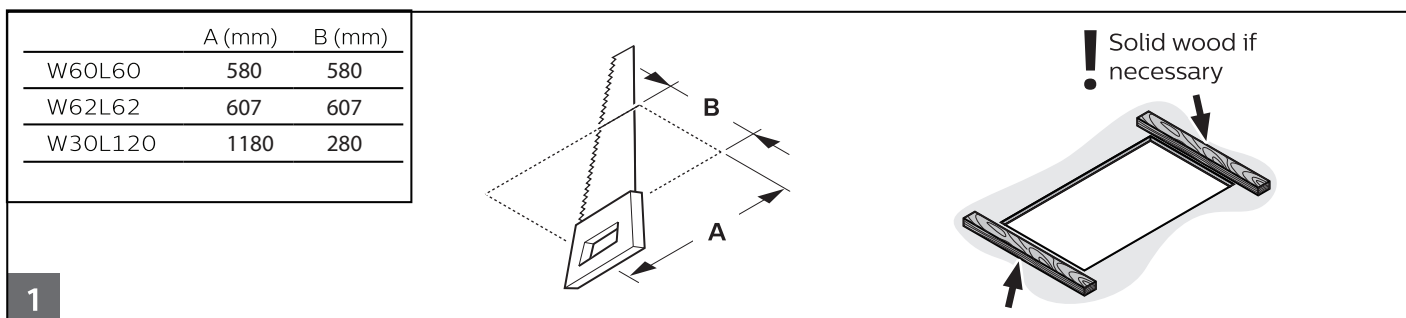







Surface mounted

Optional with
910930031018 RC132Z SMB W60L60/910930031118 RC132Z SMB W62L62/910930031218 RC132Z SMB W30L120)

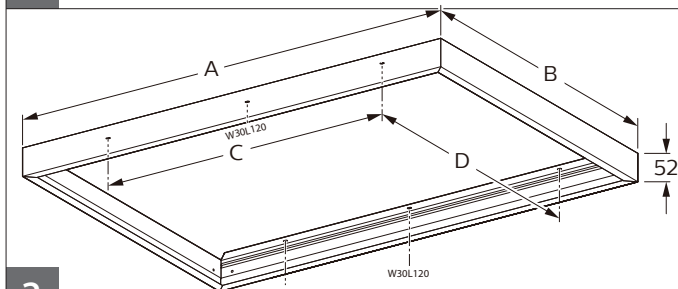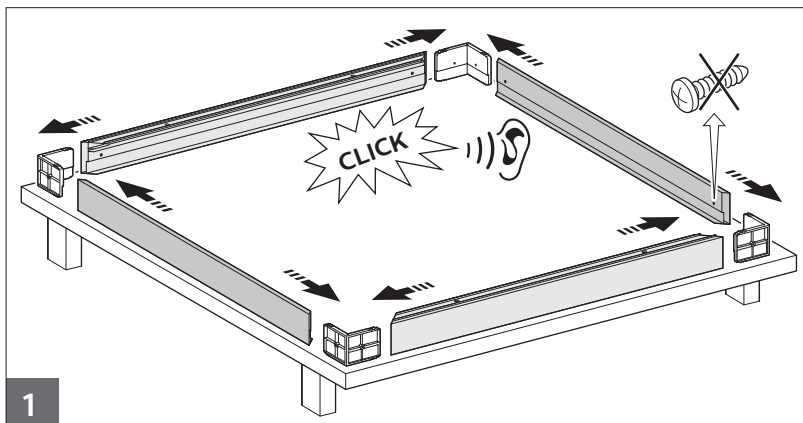

	A	B	C	D
W60L60	612	612	332	576.5
W62L62	639	639	327	601.5
W30L120	1212	312	852	276.5

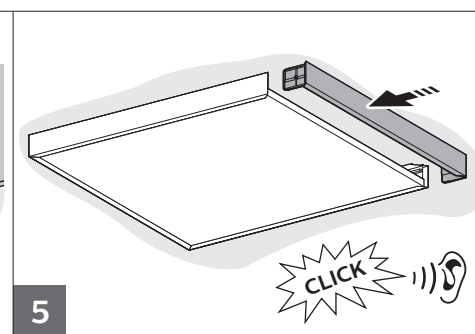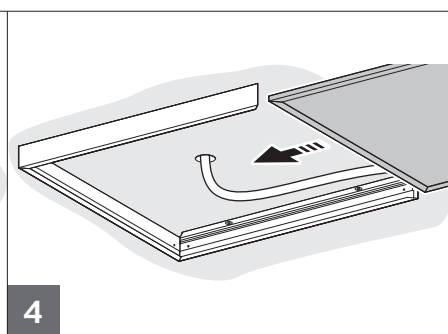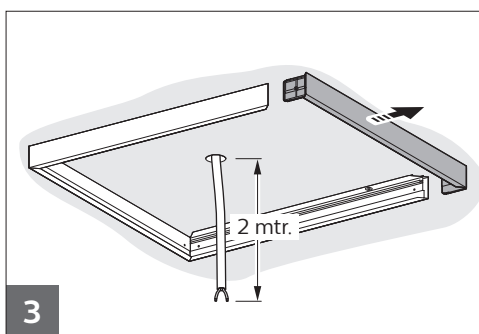
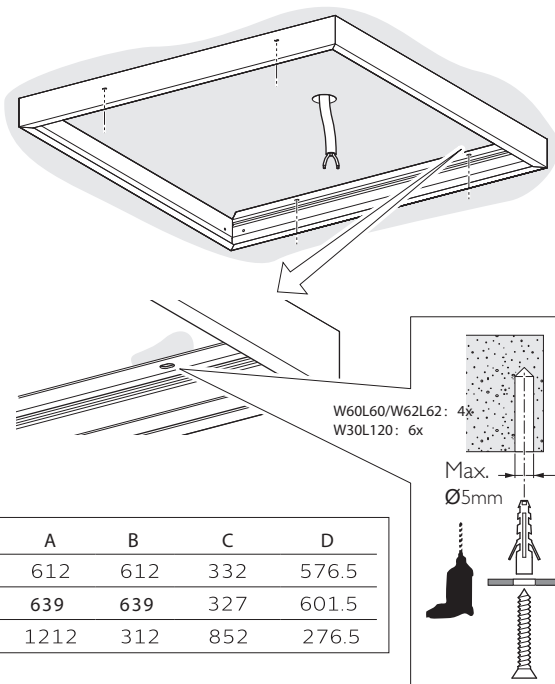


Suspension



Optional with
911401892280 RC132Z SME-3 WH/911401892380 RC132Z SME-4 WH

PSU and MultiColour/Lumen

911401892280
RC132Z SME-3 WH

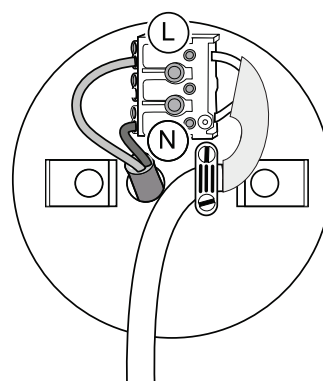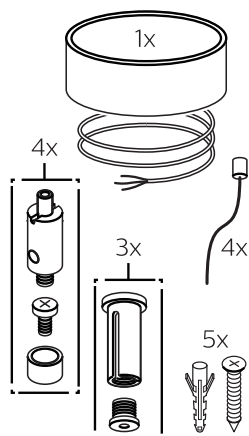


60227 IEC52
2 x 0.75-1.5 mm²
Ø 6-9mm





1a

PSD


911401892380
RC132Z SME-4 WH

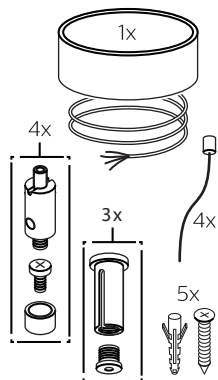



1b

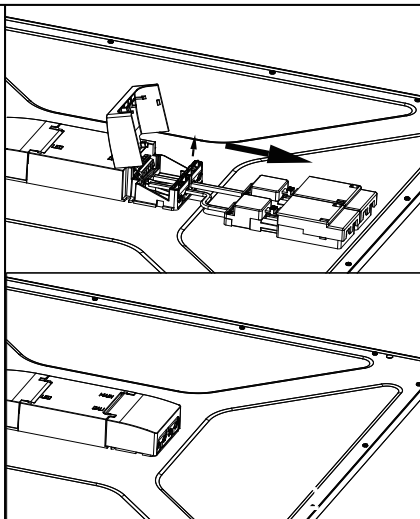


60227 IEC52
4 x 0.75-1.5 mm²
Ø 6-9mm

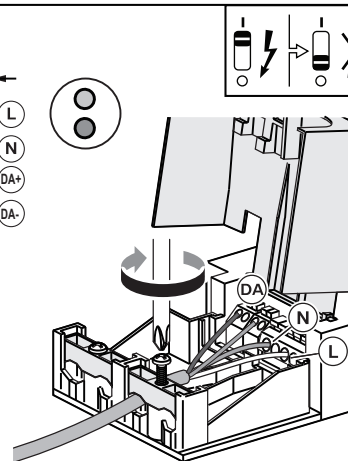

PSD Touch & Dim

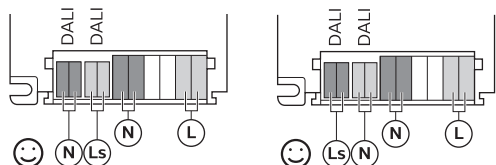




Ø 6-9mm




60227 IEC52
4 x 0.75-1.5 mm²

2


Set PSD to PSU

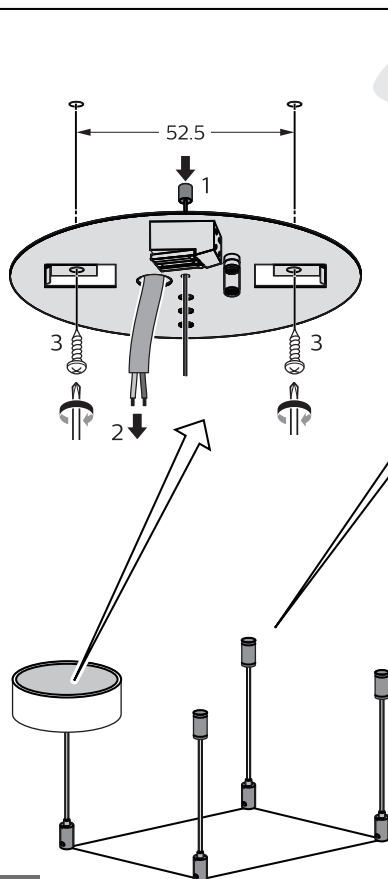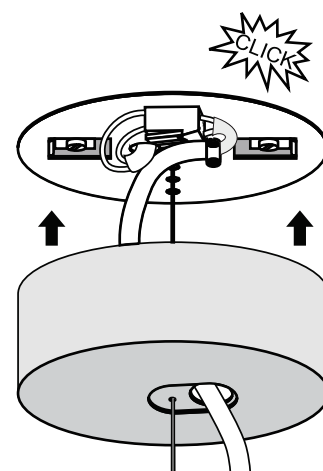


3




5

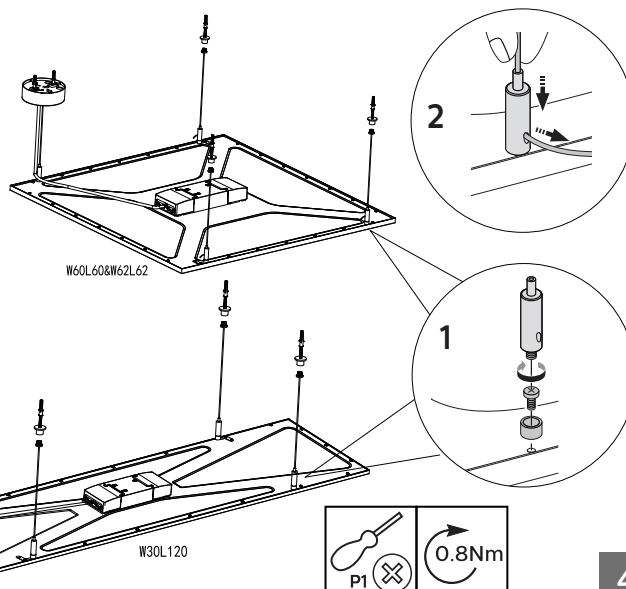

4

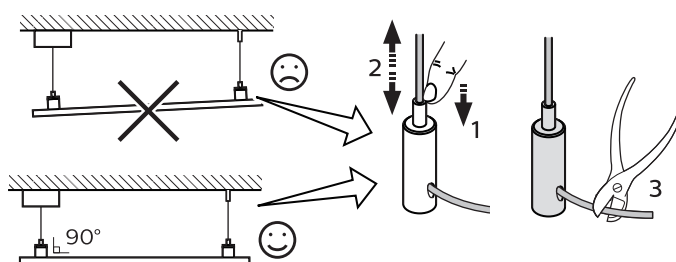

Multi/Colour Lumen

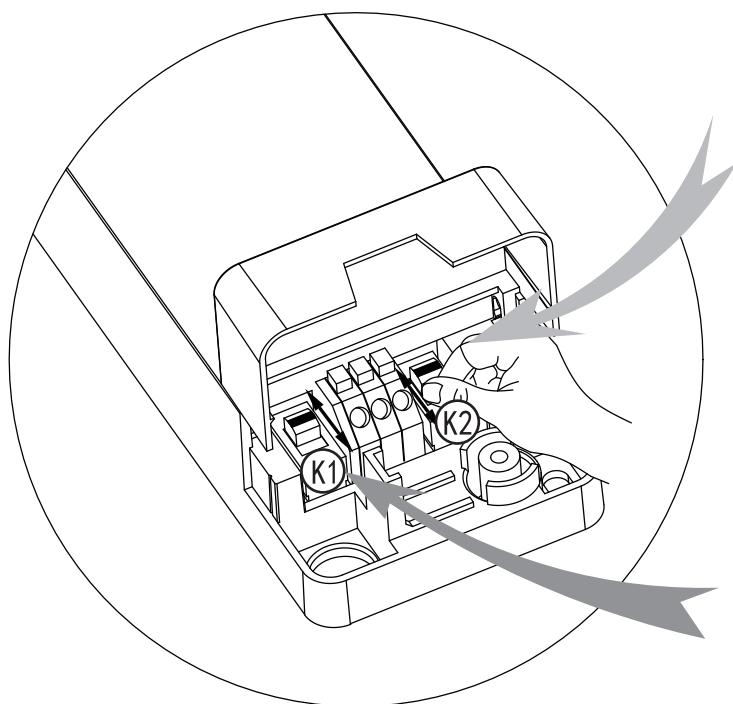

K2



4000K



3000K

K1



Default settings
3600lm @4000K




4300lm @4000K

3400lm @3000K

4000lm @3000K

Inrush current

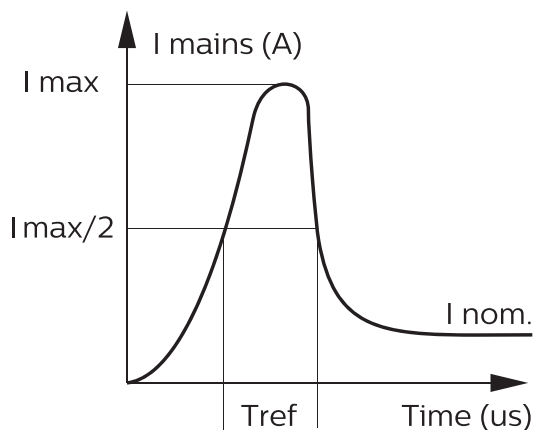

	PSU		PSD		MultiColour/Lumen
	29W	34.5W	29W	34.5W	35W
Electrical characteristics					
I _{max} (A)	5.2	6.2	14.1	14.3	15
T _{ref} (μs)	51	54	212	214	300
MCB	No. of luminaires max.				
B-10 A	25	25	19	19	11
B-16 A	40	40	30	30	18
C-10 A	42	42	31	31	16
C-16 A	68	68	51	51	31



- The luminaire shall be installed by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements.
- The light source of this luminaire is not replaceable; when the light source reached its end of life the whole luminaire shall be replaced
- During installation or maintaining the luminaire please use gloves to avoid spots on the cover.
To remove dirt and spots use the following:
 - Dust: use micro fiber cloths only.
 - Fingerprints, etc.: use a cleaner for synthetic materials with antistatic properties.
- Luminaires not suitable for covering with thermally insulating material.
- For controllable luminaires, the classification of insulation between LV supply and control conductors shall be basic insulation at least.
- Luminaire must not be used or stored in corrosive environment where hazardous materials such as Sulphur, Chlorine, Phthalates, etc, are present.

© 2019 Signify Holding.
All rights reserved. This document contains information relating to the product portfolio of Signify which information may be subject to change. No representation or warranty as to the accuracy or completeness of the information included herein is given and any liability for any action in reliance thereon is disclaimed. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.. All other trademarks are owned by Signify Holding or their respective owners.

Signify Holding,
The Netherlands

