



6060WH	6101NBK	6108NWH	6148NBK	6151NBK	7582
6060BK	6102NWH	6108NBK	6148NWH	6152NWH	7584
6061WH	6102NBK	6112NWH	6149NWH	6152NBK	7681
6061BK	6103NWH	6112NBK	6149NBK	6153NWH	7683
6096WH	6103NBK	6146NWH	6150NWH	6153NBK	
6096BK	6104NWH	6146NBK	6150NBK		
6101NWH	6104NBK		6151NWH		


Project:	
Location:	
Cat.No:	
Type:	
Lamps:	Qty:
Notes:	

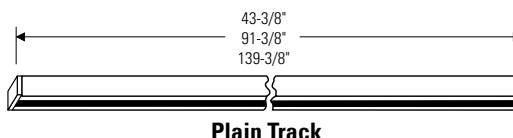


Plain Track

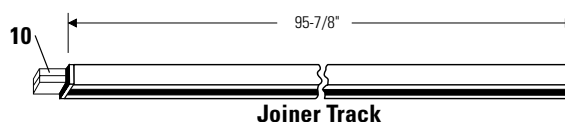

Joiner Track

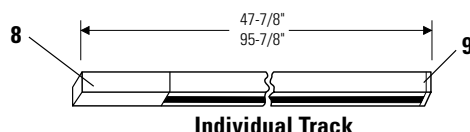

Individual Track

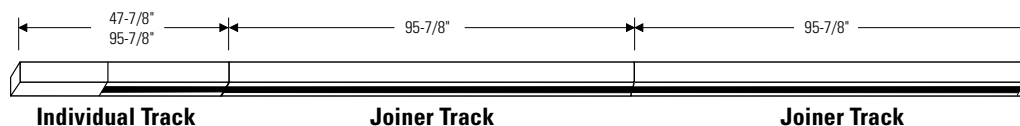

Individual Track

Joiner Track

Joiner Track

Finishes	Individual Track		Joiner Track	Plain Track		
	4' Catalog No.	8' Catalog No.	8' Catalog No.	4' Catalog No.	8' Catalog No.	12' Catalog No.
Matte White	6101NWH	6102NWH	6103NWH	6104NWH	6108NWH	6112NWH
Matte Black	6101NBK	6102NBK	6103NBK	6104NBK	6108NBK	6112NBK

Features

- Advent Lytespan Track:** 6063-T5 Aluminum 0.070" wall thickness.
- Track Mounting Clips:** 0.024 Spring steel, in black or white; order separately.
- Toggle Bolt & Screws:** furnished with track units.
- Conductor (3):** 20A current carrying capacity.
- Insulating Liner:** 0.040" wall, thermoplastic.
- Neutral Conductor:** on bead side of track.
- Polarity Bead:** identifies the neutral conductor.
- Live End:** molded thermoplastic. Includes contacts for power supply leads.
- Dead End Cover:** molded thermoplastic.
- Mini Coupler:** connects track units mechanically and electrically.

Mechanical

Track units plug together and lock securely to prevent accidental separation. Track units can be field cut.

Finish

All painted finishes are baked enamel.

Mounting

Track may be surface mounted to ceilings or walls. The track may be stem mounted. The track is not intended to be cable mounted. The track can also be recessed, see Specification Sheet 7515.

Electrical

Two circuits individually controllable, rated 20 amps. at 120 volts 60 Hz per track circuit (40 amps total for the two circuits), when supplied by a 120/240 volt, 60-Hz, single phase 3-wire branch circuit with a grounded neutral. The track is polarized and continuously grounded throughout.

Electrical (continued)

Electrical conductors are concealed in a insulating liner. Lytespan lighting units attach to the track at any point and can be adjusted to operate on either track circuit. Not intended for use with a power cord or a convenience receptacle adapter. Magnetic and electronic transformers require different dimmer controls. Use the proper control device on the track. Caution should be used when operating dimming controls on 3 wire circuiting (the neutral conductor may overload). For additional information on dimming, call 1-800-833-3664. All wiring must be in accordance with National and Local Codes.

Labels

cUL, IBEW.


6101 Lytespan

Advent 1 & 2 Circuit Track

Track Mounting and Power Feed Systems

Direct Mounting


Toggle bolts and nylon insulators are furnished with Track, two per 2' and 4' track, three per 8' and 12' track. Mount through existing holes in track. Top of track sits flush to mounting surface. *Recommended for wall and ceiling mounting.*

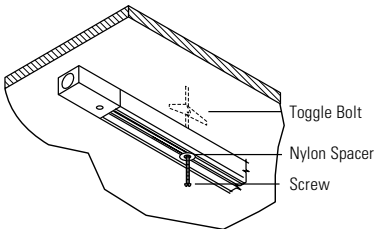

Grid Ceiling Mounting Clips


Square Edge Panels and 9/16"- 15/16" T-Bars Clip is supplied assembled. Mounts onto T-Bars by rotating clips. Use two per 2' and track, three per 8', and four per 12' track.

6089 (9) Clips

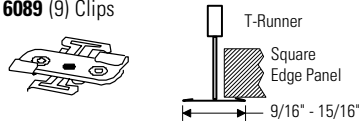


Regressed Edge Panels and 9/16"- 15/16" T-Bar Clip is supplied assembled. Mounts easily onto T-Bars by rotating clips. Use two per 2' and 4' track, three per 8', and four per 12' track.

6087 (9) Clips

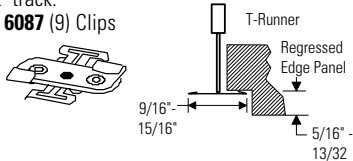

Slotted Grid Ceilings such as Donn Fineline and Chicago Metallic Ultraline 3500 and 3600. Use two per 2' and 4' track, three per 8', and four per 12' track.


6088 (9) Clips

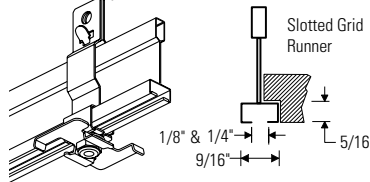

Grid Ceiling Canopy Kit

Mounts to a 4" or 3" octagonal outlet box. Use two per 2' or 4' track, three per 8' and 12' track. When making a run of track don't exceed 4' between stems. Includes a special outlet box to fit onto runners. Power can be fed to Feed Track, Live End, "L", "T", "X", and In-Line connectors. Mounts along runner or at the intersection of runners.


6096WH Matte White 6096BK Matte Black

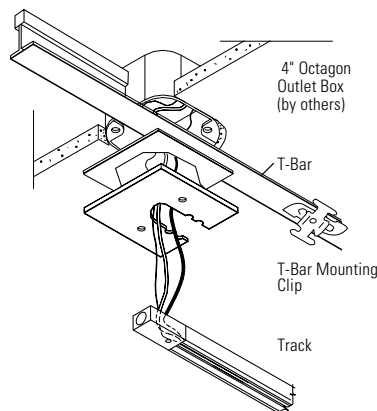

End Feed Canopy Kit

Mounts directly Live End, 'L', 'T', 'X', In-Line and Variable Angle Connectors. Mounts to a 4" or 3" octagonal outlet box. For track installed with mounting clips or direct mounted. Canopy is 3/32" thick and 4-1/2" square.


6060WH Matte White 6060BK Matte Black

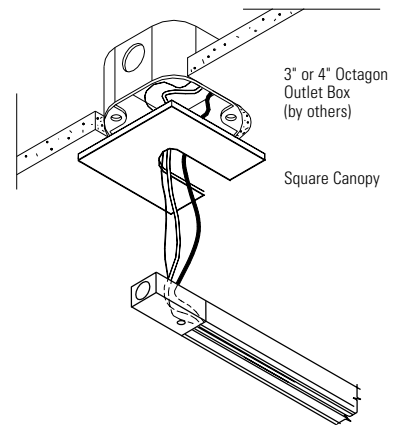

Floating Canopy Kit

Mounts to a 4" or 3" octagonal outlet box. Canopy is positioned anywhere along track, up to 4' from edge of track extrusion. Power can be fed to Live End, 'L', 'T', 'X', In-Line and Variable Angle Connectors. Mount track using track mounting clips. Canopy is 3/32" thick and 4-1/2" square.

6061WH Matte White 6061BK Matte Black

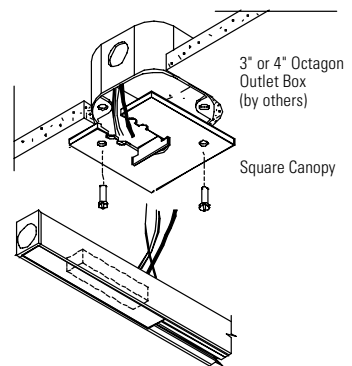

6101 Lytespan

Advent 1 & 2 Circuit Track

Track Mounting and Power Feed Systems

Stem Mounting Kits


Mounts to a 4" or 3" octagon outlet box. Use two per 2' and 4' track, three per 8' and 12' track. When making a run of track do not exceed 4' between stems. Use additional stems for additional support. Power is fed to the track with the stem closest to the track feed-in point. For power feed to Feed Track and Live End, "L", "T", "X", In-line, and Variable Angle Connectors. Stem can be field cut.

Not recommended for wall mounting.

Stem mounts to track 18" Stem 48" Stem
not feed connector.

Actual length from ceiling to top of track:
17 3/8" 47 3/8"

Matte White 7584 7586
Matte Black 7683 7681

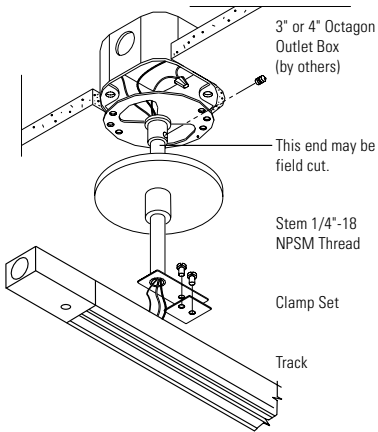


Live End

Energizes Track from the beginning of a run. is included with Individual Track Units. Use with plain track units.

6148NWH Matte White

6148NBK Matte Black




Mini-Coupler

Used to connect two pieces of track together mechanically and electrically. *Power cannot be fed to the Mini-Coupler.* It is included with Joiner Track Units.

6149NWH Matte White

6149NBK Matte Black

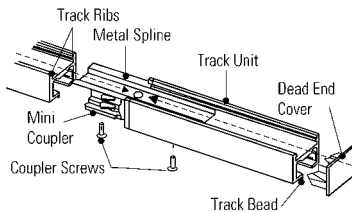


Stem Extension Kit

Mounts to any stem kit to extend its length by 48". *Cannot be field cut.*


7582 Matte White

7680 Matte Black

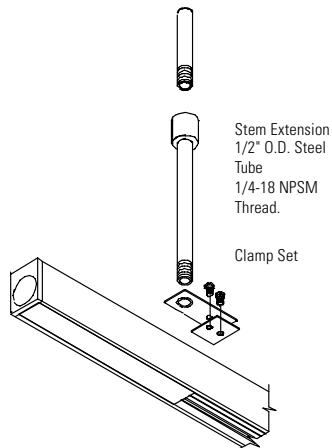


Wiring Diagram

(3) wire two circuit 120/240, 60Hz single phase with grounded neutral. Maximum load. 2400W (incand.) 20 amp per track circuit, 4800W 40 amps total.

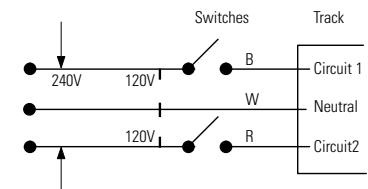

120V 60Hz single branch circuit, 20 amp supply. Maximum load, 2400W (incand.) distributed between track circuits.

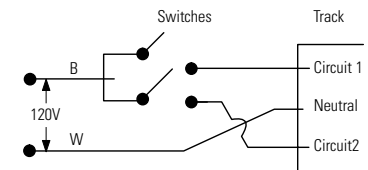

6101 Lytespan

Advent 1 & 2 Circuit Track


Track Mounting, Power Feed Systems and Mounting Patterns

Variable Angle Connector

The Variable Angle Connector is pre-wired and polarized. It contains a nut with a thread 1/2"-14 to accept a 3/8" (trade sized) electrical connector. Flexes in all directions.


6153NWH Matte White

6153NBK Matte Black

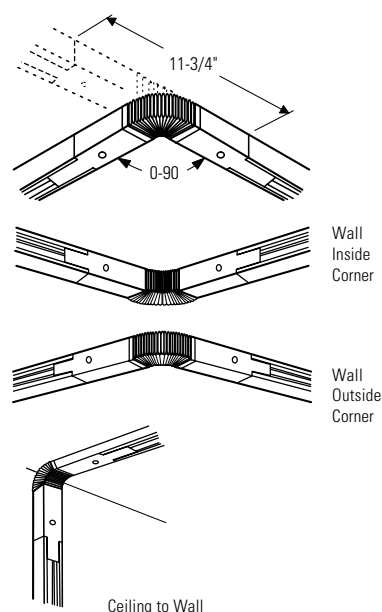

Direct Feed into Connectors

The Live End, "L", "T", "X", In-line, and Variable Angle Connectors contain a nut with a 1/2"-14 thread to accept a 3/8" or 1/2" (trade size) electrical connector, 3/8" connector recommended. Does not require a separate power feed kit.

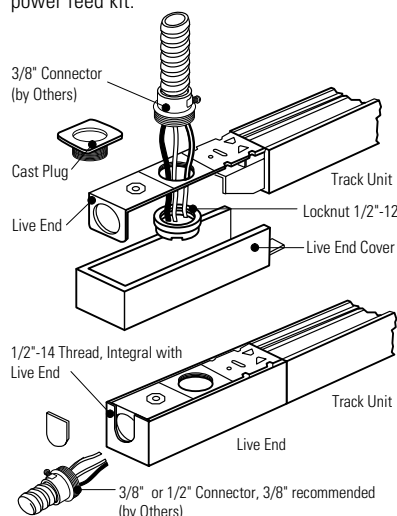


Power Extension Connector

Replaces Dead End Cover at end of track to permit power continuity around structural obstacles to another track section. Accepts same power feed-in kits as Live End.


6146NWH Matte White

6146NBK Matte Black

Over Beam or Through Beam

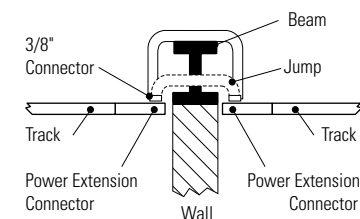

Through Wall or Column

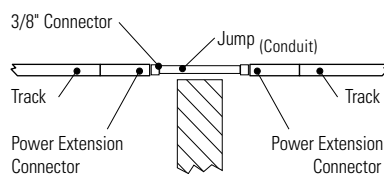


"L" Connector

The "L" connector is polarized and pre-wired. It may be rotated for right angle or left angle turn. KO permits direct feed with electrical connector.

6150NWH Matte White

6150NBK Matte Black




"T" Connector

The "T" connector is not pre-wired or polarized. Used to make "T" pattern with track. 12 ga. copper jumper wires supplied to make all necessary connections. KO permits direct feed with electrical connector.

6151NWH Matte White

6151NBK Matte Black



"X" Connector

The "X" connector is not pre-wired or polarized. Used to make "X" pattern with track. 12ga. copper jumper wires supplied to make all necessary connections. KO permits direct feed with electrical connector.

6152NWH Matte White

6152NBK Matte Black

