



The affordable LED solution

CorePro LEDtube InstantFit HF

CorePro LEDtube InstantFit HF is an affordable LED solution suitable for replacing T8 fluorescent lamps. It provides a natural lighting effect for use in general lighting applications, as well as instant energy savings – an environmentally friendly solution.

Benefits

- Minimises overall lighting costs
- Offers the cheapest and easiest upgrade to LED lighting technology

Features

- High energy efficiency
- Long lifetime
- Easy installation; retrofit replacement of existing T8 lamps on electronic (HF) ballast installations
- Conventional form factor to fit into existing luminaires
- No mercury

Application


- Open-air and covered car parks
- Industrial facilities and warehouses
- Signage

CorePro LEDtube InstantFit HF

Versions



Dimensional drawing

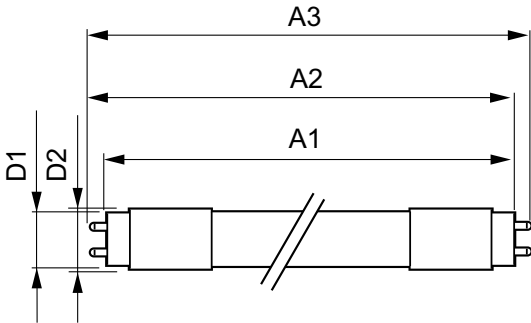

Product	D1	D2	A1	A2	A3
CorePro LEDtube HF 600mm 9W840 T8 G	27.9 mm	28 mm	589.8 mm	595.7 mm	604 mm
CorePro LEDtube HF 600mm 9W865 T8 G	27.9 mm	28 mm	589.8 mm	595.7 mm	604 mm

CorePro LEDtube InstantFit HF

Approval and Application	
Energy Consumption kWh/1000 h	12 kWh
Energy Efficiency Label (EEL)	A
Controls and Dimming	
Dimmable	No
Operating and Electrical	
Input Frequency	20000-80000 Hz
Voltage (Nom)	30-80 V
Power (Rated) (Nom)	9 W
Starting Time (Nom)	0.5 s
General Information	
Cap-Base	G13
Nominal Lifetime (Nom)	30000 h
Switching Cycle	50,000X
Light Technical	
Beam Angle (Nom)	240 °
Colour Rendering Index (Nom)	83
Llmf At End Of Nominal Lifetime (Nom)	70 %
Luminous Flux (Nom)	800 lm
Mechanical and Housing	
Bulb Shape	Tube, double-ended
Temperature	
T-Ambient (Max)	45 °C
T-Ambient (Min)	-20 °C
T-Case Maximum (Nom)	60 °C
T-Storage (Max)	65 °C
T-Storage (Min)	-40 °C

Light Technical

Order Code	Full Product Name	Colour Code	Correlated Colour Temperature (Nom)
65217600	CorePro LEDtube HF 600mm 9W840 T8 G	840	4000 K
65219000	CorePro LEDtube HF 600mm 9W865 T8 G	865	6500 K

