



Architectural Lighting DMX Controls and Wiring Accessories

ZXP399 DMX Controls and Accessories

The ZXP399 DMX Controls and Wiring Accessories are to be used with our architectural and facade lighting luminaires (UniFlood C, M and G, UniStrip G4, UniEdge, UniDot G2, UniString and UniBar). DMX Controls include a main controller, stand-alone controller, sub-controllers, DMX amplifier and DMX addressing device. Main Controller: Industrial computer that can control up to 6,000 DMX universes. Stand-alone Controller: Fits all medium applications with up to 700 DMX universes. Wiring accessories include leader and jump cables with male and female IP67 connectors and end-caps. Addressing Device: Hand-held device that can write DMX addresses to a whole run on-site within minutes. DMX Amplifier: Compact, IP65 and low-power repeater that can amplify the DMX signal for up to 100 metres.

Application

- Bridges, Monuments, Facades
- Landscape
- Parks and squares

ZXP399 DMX Controls and Accessories

Versions



ZXP399 Endcap F



ZXP399 4P Leader Cable



ZXP399 Endcap M



ZXP399 Y Connector



Addressing Kit



DMX Amplifier



DMX Amplifier





ZXP399 Jumper DMX connector









DMX Amplifier

Dimensional drawing




ZXP399 DMX Controls and Accessories

Dimensional drawing

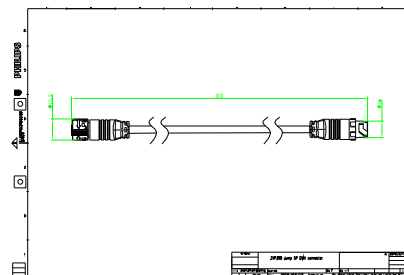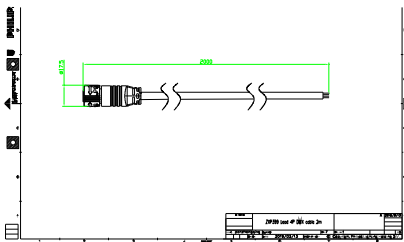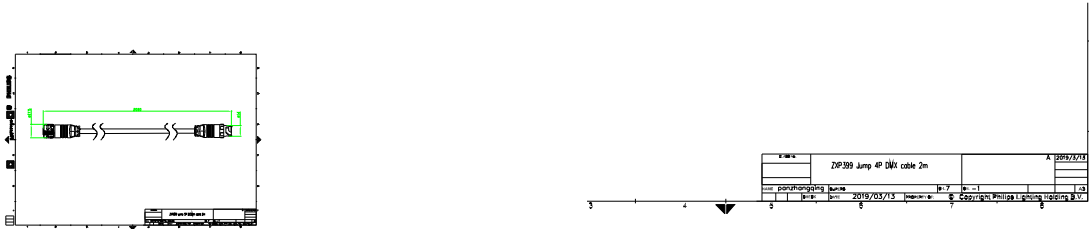

ZXP399 DMX Controls and Accessories

Dimensional drawing



Product details

DMX addressing kit



DMX addressing kit



DMX addressing kit

