

Maxos LED

4MX850 581 LED55S/830 PSD DA20 SI

Maxos Led Industry - 1 unit for TL-D 58 W - LED Module, system flux 5500 lm - 830 warm white - Power supply unit with DALI interface - Double asymmetric optic 20° - Silver

Customers in the industrial and retail sectors are looking for general lighting solutions with a justifiable payback, while meeting all relevant norms for supermarkets and industry applications. For a limited investment, Maxos LED Industry offers best-in-class energy savings while delivering high lux levels at the required color temperatures and glare factors. The minimalistic Maxos LED Industry system comprises exchangeable mid-power LED boards mounted on a standard Maxos trunking rail. A choice of wide and medium-beam lenses means flexibility in light distribution. Compared with a conventional fluorescent installation, this highly efficient LED solution offers full payback in less than three years. And the benefits keep coming: the use of our upgradable LED engine platform makes Maxos LED Industry a truly future-proof solution.

Product data

| General Information | | | |
|-------------------------------|--|-----------------------------|---|
| Number of light sources | 1 [1 pc] | Optic type | DA20 [Double asymmetric optic 20°] |
| Lamp family code | LED55S [LED Module, system flux 5500 lm] | Optical cover/lens type | PM [PMMA bowl/cover] |
| Beam angle of light source | 120 ° | Luminaire light beam spread | 20° |
| Light source color | 830 warm white | Control interface | DALI |
| Cap-Base | - [-] | Connection | CU5 [Connection unit 5-pole] |
| Light source replaceable | No | Cable | - |
| Number of gear units | 1 unit | Protection class IEC | Safety class I (I) |
| Gear | - | Glow-wire test | 650/30 [Temperature 650 °C, duration 30 s] |
| Driver/power unit/transformer | PSD [Power supply unit with DALI interface] | Flammability mark | NO [-] |
| Driver included | Yes | CE mark | CE mark |
| | | ENEC mark | ENEC mark |

Maxos LED

| | |
|--|---|
| UL mark | - |
| Warranty period | 5 years |
| Remarks | *-Per Lighting Europe guidance paper "Evaluating performance of LED based luminaires - January 2018": statistically there is no relevant difference in lumen maintenance between B50 and for example B10. Therefore the median useful life (B50) value also represents the B10 value. |
| Constant light output | No |
| Number of products on MCB of 16 A type B | 24 |
| EU RoHS compliant | Yes |
| Service tag | Yes |
| Product family code | 4MX850 [Maxos Led Industry] |
| Unified glare rating CEN | Not applicable |

Operating and Electrical

| | |
|------------------------|----------------|
| Input Voltage | 220-240 V |
| Input Frequency | 50 to 60 Hz |
| Control signal voltage | 0-16 V DC DALI |
| Inrush current | 21 A |
| Inrush time | 0.280 ms |
| Power Factor (Min) | 0.9 |

Controls and Dimming

| | |
|----------|-----|
| Dimmable | Yes |
|----------|-----|

Mechanical and Housing

| | |
|-----------------------------|-----------------------------|
| Trunking length | 581 [1 unit for TL-D 58 W] |
| Housing Material | Steel |
| Reflector material | - |
| Optic material | Polymethyl methacrylate |
| Optical cover/lens material | Polymethyl methacrylate |
| Fixation material | Steel |
| Optical cover/lens finish | Clear |
| Overall length | 1528 mm |
| Overall width | 63 mm |
| Overall height | 50 mm |
| Color | Silver |

| | |
|-------------------------------------|---------------------------------------|
| Dimensions (Height x Width x Depth) | 50 x 63 x 1528 mm (2 x 2.5 x 60.2 in) |
|-------------------------------------|---------------------------------------|

Approval and Application

| | |
|------------------------------|--------------------------|
| Ingress protection code | IP20 [Finger-protected] |
| Mech. impact protection code | IK02 [0.2 J standard] |

Initial Performance (IEC Compliant)

| | |
|-------------------------------------|------------------------|
| Initial luminous flux (system flux) | 5500 lm |
| Luminous flux tolerance | +/-10% |
| Initial LED luminaire efficacy | 157 lm/W |
| Init. Corr. Color Temperature | 3000 K |
| Init. Color Rendering Index | ≥80 |
| Initial chromaticity | (0.43, 0.40) SDCM <3.5 |
| Initial input power | 35 W |
| Power consumption tolerance | +/-10% |

Over Time Performance (IEC Compliant)

| | |
|---|-----|
| Control gear failure rate at median useful life 50000 h | 5 % |
| Lumen maintenance at median useful life* 50000 h | L80 |

Application Conditions

| | |
|------------------------------------|----------------|
| Ambient temperature range | -20 to +35 °C |
| Performance ambient temperature Tq | 25 °C |
| Maximum dim level | 1% |
| Suitable for random switching | Not applicable |


Product Data

| | |
|---------------------------------|-----------------------------------|
| Full product code | 403073266267899 |
| Order product name | 4MX850 581 LED55S/830 PSD DA20 SI |
| EAN/UPC - Product | 4030732662678 |
| Order code | 66267899 |
| Numerator - Quantity Per Pack | 1 |
| Numerator - Packs per outer box | 3 |
| Material Nr. (12NC) | 910629125426 |
| Net Weight (Piece) | 1.815 kg |



Maxos LED

Dimensional drawing

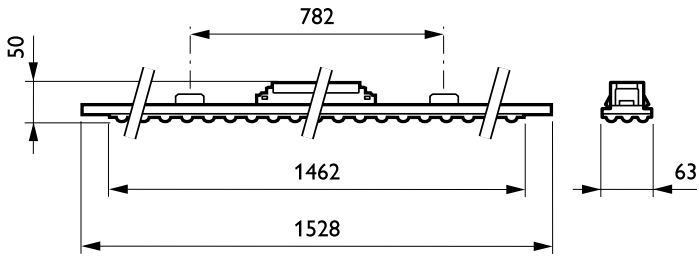

Maxos LED electr. units 4MX850-883

