



# HF-Selectalume II for TL5 lamps

## HF-S 214-35 TL5 II 220-240V 50/60Hz

HF-Selectalume II is the most cost-effective, reliable, slim and affordable fluorescent solution, with highly disruptive technology for energy saving, system flexibility and unsurpassed performance. The cost-saving HF-Selectalume II has a robust design which meets all relevant international safety and performance standards. HF-Selectalume II is intended for use with indoor lighting fixtures such as spotlights, downlights and recessed luminaires, which are largely used in office, retail, industry, hotel, restaurant and other applications where control devices are installed with occasional On/Off switching activity

### Product data


Operating and Electrical		T-case lifetime (nom.)		75 °C
Input Voltage	220 to 240 V	T-Case maximum (max.)		75 °C
Line Frequency	50 to 60 Hz			
Input frequency	50 to 60 Hz	Mechanical and Housing		
Earth leakage current (max.)	0.5 mA	Housing	L360x30x22	
Inrush current width	0.25 ms			
Inrush current peak (max.)	24 A	Approval and Application		
Number of products on MCB (16 A type B) (nom.)	28	Ingress protection code	IP20 [Finger-protected]	
		Energy efficiency index	A2 BAT	
		Approval marks	CE marking ENEC certificate CCC certificate C-Tick certificate TISI marking SIRIM approval CCC certificate	
Wiring				
Connector type input terminals	WAGO 744 connector	Product Data		
Connector type output terminals	WAGO 744 connector [Suitable for manual wiring]	Order product name	HF-S 2 14-35 TL5 HE II 220-240V	
		Full product name	HF-S 214-35 TL5 II 220-240V 50/60Hz	
Temperature		Full EOC	871829175844000	
Ambient temperature range	-20°C to 55°C			

HF-Selectalume II for TL5 lamps

Order code	75844000
Material no. (12 NC)	913713042166
Local order code	HFS21435TL5HEII
SAP numerator – quantity per pack	1
EAN/UPC – Product/Case	8718291758440

Numerator – packs per outer box	12
EAN/UPC – Case	8718291758457

Dimensional drawing

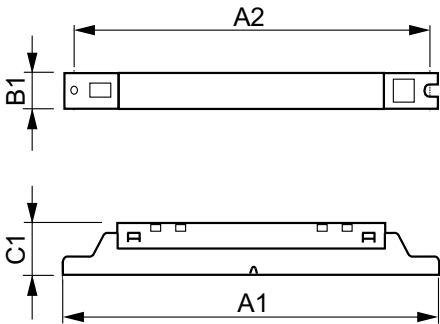

Product	D1	C1	A1	A2	B1
HF-S 2 14-35 TL5 HE II 220-240V	4.2 mm	22.0 mm	360.0 mm	350.0 mm	30.0 mm

