



MASTER TL-D Super 80



MASTER TL-D Super 80 36W/830 UNP/25

The MASTER TL-D Super 80 lamp offers more lumens per watt and better color rendering than TL-D standard colors. Furthermore, it has a lower mercury content. The lamp can be operated in existing TL-D luminaires.

Warnings and Safety

• A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information					
Cap-Base	G13 [Medium Bi-Pin Fluorescent]				
Flux measurement reference	Sphere				
Life to 50% Failures (Nom)	15,000 hour(s)				
Light Technical					
Color Code	830 [CCT of 3000K]				
Luminous Flux	3,350 lm				
Color Designation	Warm White (WW)				
Chromaticity Coordinate X (Nom)	0.44				
Chromaticity Coordinate Y (Nom)	0.403				
Correlated Color Temperature (Nom)	3000 K				
Luminous Efficacy (rated) (Nom)	93 lm/W				
Color rendering index (CRI)	82				
Operating and Electrical					
Power Consumption	36.8 W				

Lamp Current (Nom)	0.440 A		
Controls and Dimming			
Dimmable	Yes		
Mechanical and Housing			
Bulb Shape	Т8		
Approval and Application			
Energy Efficiency Class	G		
Mercury (Hg) Content (Nom)	1.7 mg		
Energy Consumption kWh/1000 h	37 kWh		
EPREL Registration Number	423380		
Product Data			
Order product name	MASTER TL-D Super 80 36W/830 UNP/25		
Full product name	MASTER TL-D Super 80 36W/830 UNP/25		


Datasheet, 2024, February 8 data subject to change

MASTER TL-D Super 80

Full product code	871150061017140		
Order code	927921083069		
Material Nr. (12NC)	927921083069		
Numerator - Quantity Per Pack	1		
EAN/UPC - Product/Case	8711500610171		


Numerator - Packs per outer box	25
EAN/UPC - Case	8711500632470

Dimensional drawing




Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL-D Super 80	28 mm	1,199.4 mm	1,206.5 mm	1,204.1 mm	1,213.6 mm
36W/830 UNP/25					


Photometric data

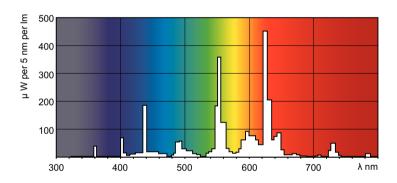

Spectral Power Distribution Colour - MASTER TL-D Super 80 36W/830 UNP/25

Lifetime

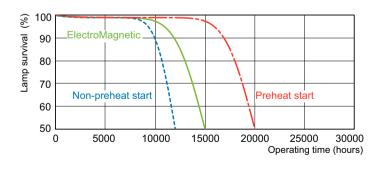




Life Expectancy Diagram - MASTER TL-D Super 80 36W/830 UNP/25

Life Expectancy Diagram - MASTER TL-D Super 80 36W/830 UNP/25

MASTER TL-D Super 80

Lifetime

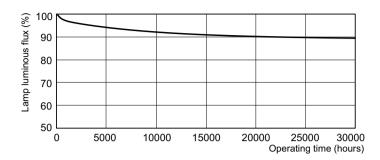

Lumen Maintenance Diagram - MASTER TL-D Super 80 36W/830 UNP/25

