



Actinic BL TL(-K) / TL-D(-K)

Actinic BL TL 6W/10 1FM/10X25CC

Tubular low-pressure mercury vapour fluorescent lamps

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information	
Cap-Base	G5 [G5]
Life to 50% Failures (Nom)	10,000 h
Useful Life (Nom)	5,000 h
Light Technical	
Color Code	10
Color Designation	Actinic
Chromaticity Coordinate X (Nom)	222
Chromaticity Coordinate Y (Nom)	210
UV Depreciation at 1000 h	25 %
UV Depreciation at 2000 h	35 %
UV Depreciation at 5000 h	50 %
UV Depreciation at 500 h	17 %
UV Depreciation at 8000 h	60 %
Operating and Electrical	
Power Consumption	6 W
Lamp Current (Nom)	0.16 A


Voltage (Nom)	42 V
Voltage (Nom)	42 V
Mechanical and Housing	
Bulb Shape	T16 [T 16mm]
Approval and Application	
Mercury (Hg) Content (Nom)	4.4 mg
UV	
UV-A Radiation 100Hr (IEC)	1.4 W
Product Data	
Order product name	Actinic BL TL 6W/10 1FM/10X25CC
Full product name	Actinic BL TL 6W/10 1FM/10X25CC
Full product code	871150026039027
Local code description	TL6W10
Order code	928000501030
Material Nr. (12NC)	928000501030

Actinic BL TL(-K) / TL-D(-K)

Local order code	TL6W10
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8711500260390
Numerator - Packs per outer box	250


EAN/UPC - Case	8711500260413
----------------	---------------

Dimensional drawing

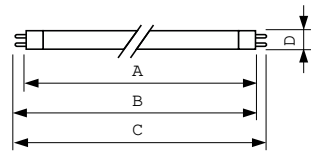

Product	D (max)	A (max)	B (max)	B (min)	C (max)
Actinic BL TL 6W/10 1FM/10X25CC	16 mm	212.1 mm	219.2 mm	216.8 mm	226.3 mm

Photometric data

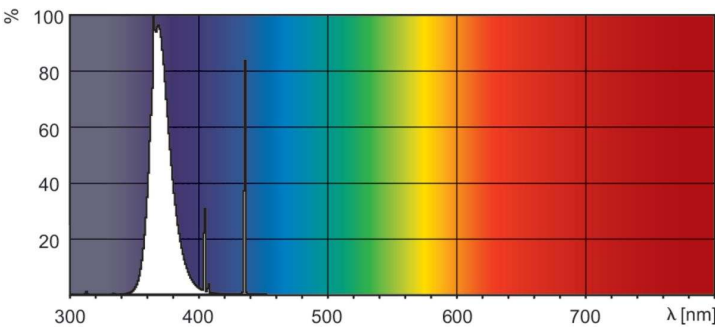

Spectral Power Distribution Colour - Actinic BL TL 6W/10 1FM/10X25CC

