



MASTER TL-D Food

MASTER TL-D Food 30W/79 1SL/25

Low-pressure mercury discharge lamps with a tubular 26 mm envelope

Product data

General Information	
Cap base	G13 [Medium Bi-Pin Fluorescent]
Life to 50% failures (nom.)	15000 h
Life to 50% failures preheat (nom.)	20000 h

Light Technical	
Colour Code	79
Lamp Luminous Flux 25°C EL (Nom)	1300 lm
Colour Designation	Food
Lumen maintenance 2,000 hours (nom.)	90 %
Lumen maintenance 5,000 hours (nom.)	85 %
Colour Temperature, horizontal (Nom)	3800 K
Lamp Luminous Efficacy EM (Nom)	43 lm/W
Colour Rendering Index, horiz (Nom)	74

Operating and Electrical	
Power (Rated) (Nom)	30.0 W
Lamp current (nom.)	0.360 A
Voltage (Nom)	98 V

Controls and Dimming	
Dimmable	yes


Approval and Application	
Energy efficiency label (EEL)	B
Mercury (Hg) content (nom.)	5.0 mg
Energy Consumption kWh/1000 h	37 kWh

Product Data	
Full product code	871150070624940
Order product name	MASTER TL-D Food 30W/79 SLV/25
EAN/UPC – product	8711500706249
Order code	70624940
Local Code	9280-254-02006
Numerator – quantity per pack	1
Numerator – packs per outer box	25
Material no. (12NC)	928025402043
Net weight (piece)	113.000 g
ILCOS Code	FD-30/38/2A-E-G13

Warnings and Safety

MASTER TL-D Food

Dimensional drawing





Product

MASTER TL-D Food 30W/79 SLV/25

TL-D Food 30W/79



Photometric data

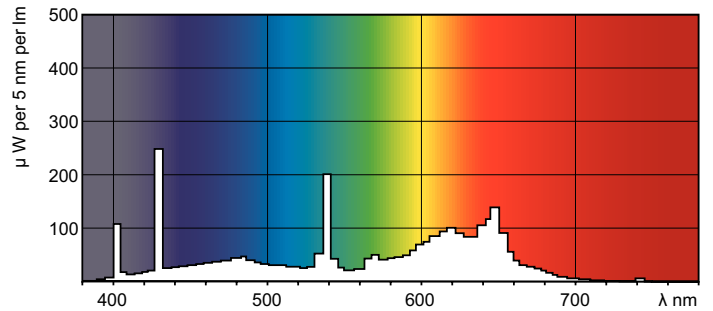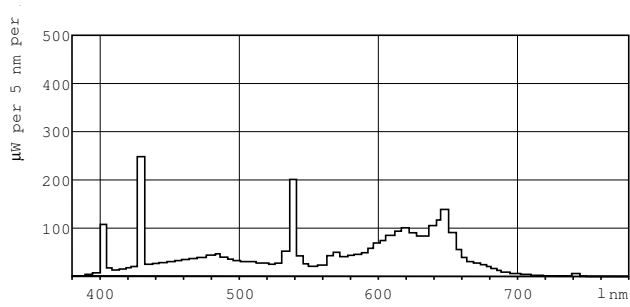

Lightcolour /79

Lightcolour /79

Lifetime

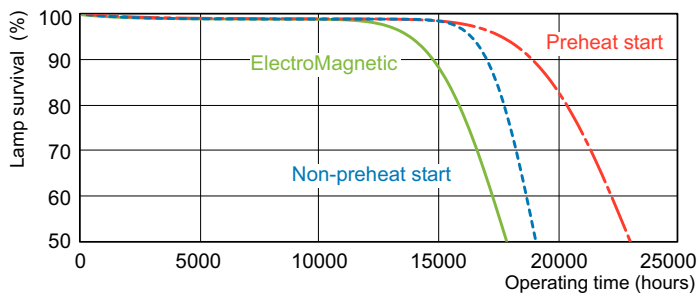


LDLE_TL-DFOOD_0002-Life expectancy diagram

LDLE_TL-DFOOD_0001-Life expectancy diagram

MASTER TL-D Food

Lifetime

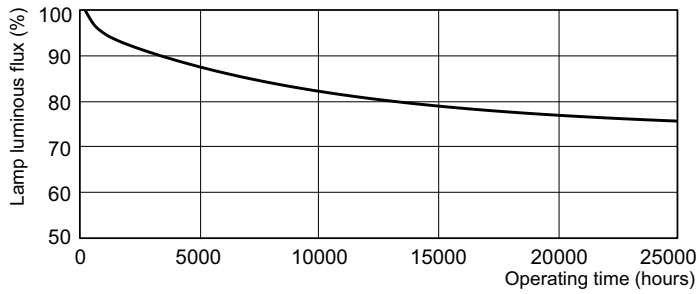

LDLM_TL-DFOOD_0001-Lumen maintenance diagram

