



MASTER TL-D Food

MASTER TL-D Food 30W/79 SLV/25

The TL-D Food lamp makes the appearance of meat and bakery products more fresh and tasty. It can be applied for food illumination in butcher shops, bakeries, supermarkets etc.

Product data

General Information	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]
Life to 50% Failures (Nom)	15000 h
Life to 50% Failures Preheat (Nom)	20000 h

Light Technical	
Color Code	79
Luminous Flux (Nom)	1300 lm
Color Designation	Food
Lumen Maintenance 2000 h (Nom)	90 %
Lumen Maintenance 5000 h (Nom)	85 %
Correlated Color Temperature (Nom)	3800 K
Luminous Efficacy (rated) (Nom)	43 lm/W
Color Rendering Index (Nom)	74

Operating and Electrical	
Power (Nom)	30.0 W
Lamp Current (Nom)	0.360 A
Voltage (Nom)	98 V

Controls and Dimming	
Dimmable	Yes


Approval and Application	
Energy Efficiency Label (EEL)	B
Mercury (Hg) Content (Nom)	5.0 mg
Energy Consumption kWh/1000 h	37 kWh

Product Data	
Full product code	871150070624940
Order product name	MASTER TL-D Food 30W/79 SLV/25
EAN/UPC - Product	8711500706249
Order code	928025402043
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material Nr. (12NC)	928025402043
Net Weight (Piece)	113.000 g
ILCOS Code	FD-30/38/2A-E-G13

Warnings and Safety

MASTER TL-D Food

Dimensional drawing

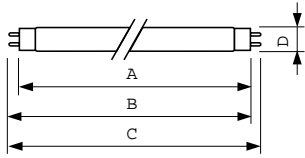


Product


MASTER TL-D Food 30W/79 SLV/25

TL-D Food 30W/79

Photometric data

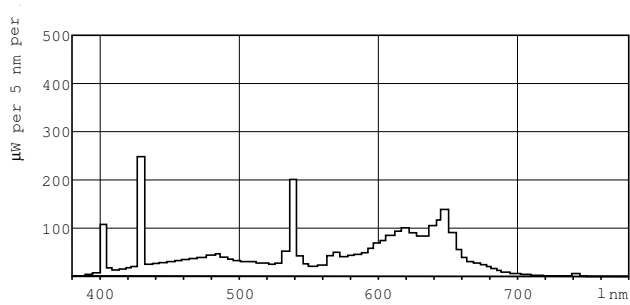


LDPB_TL-DFOOD_79-Spectral power distribution B/W

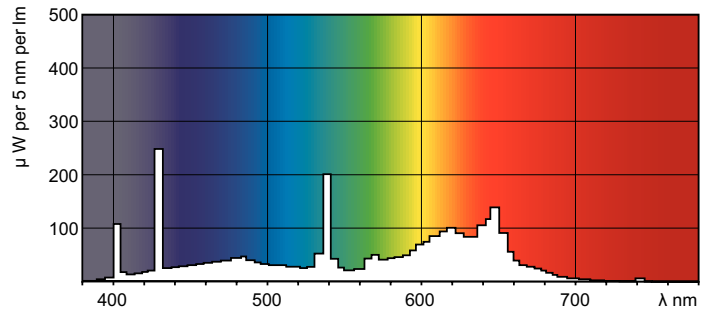


LDPO_TL-DFOOD_79-Spectral power distribution Colour

Lifetime

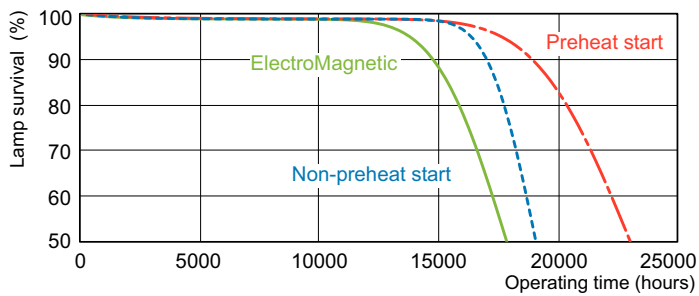


LDLE_TL-DFOOD_0002-Life expectancy diagram



LDLE_TL-DFOOD_0001-Life expectancy diagram

MASTER TL-D Food

Lifetime

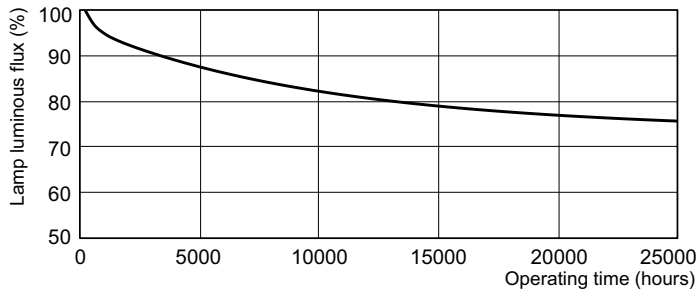

LDLM_TL-DFOOD_0001-Lumen maintenance diagram

