



# **HPL-N**

## HPL-N 250W/542 E40 1SL/12

Standard High Pressure Mercury lamp

#### **Warnings and Safety**

- For use with control gear designed for high-pressure mercury lamps
- For use with control gear designed for high-pressure mercury lamps
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

General Information		
Cap-Base	E40 [E40]	
Operating Position	UNIVERSAL [Any or Universal (U)]	
Life to 50% Failures (Nom)	15,000 hour(s)	
Light Technical		
Color Code	542 [CCT of 4200K]	
Color Designation	Cool White (CW)	
Chromaticity Coordinate X (Nom)	381	
Chromaticity Coordinate Y (Nom)	383	
Correlated Color Temperature (Nom)	4100 K	
Luminous Efficacy (rated) (Nom)	51 lm/W	
Color rendering index (CRI)	40	
Operating and Electrical		
Power Consumption	250.0 W	

Voltage (Nom)	135 V	
Voltage (Nom)	135 V	
Controls and Dimming		
Dimmable	No	
Mechanical and Housing		
Bulb Finish	Coated glass	
Bulb Material	Hard Glass	
Bulb Shape	ED90 [ED 90mm]	
Approval and Application		
Mercury (Hg) Content (Nom)	38 mg	
Energy Consumption kWh/1000 h	275 kWh	


Datasheet, 2023, April 14 data subject to change

### **HPL-N**

Product Data	
Order product name	HPL-N 250W/542 E40 1SL/12
Full product name	HPL-N 250W/542 E40 1SL/12
Full product code	692059027781800
Order code	928053007492
Material Nr. (12NC)	928053007492


Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	6920590277818
Numerator - Packs per outer box	12
EAN/UPC - Case	6920590277825


#### Dimensional drawing




Product	D (max)	C (max)
HPL-N 250W/542 E40 1SL/12	91 mm	226 mm

#### Photometric data






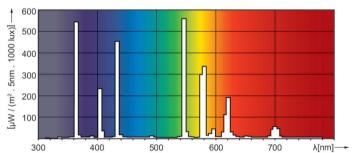


Light Distribution Diagram - HPL-N 250W/542 E40 1SL/12

Spectral Power Distribution Colour - HPL-N 250W/542 E40 1SL/12

#### Lifetime

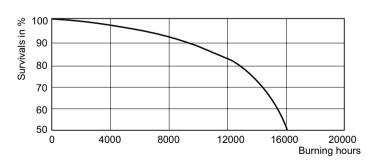

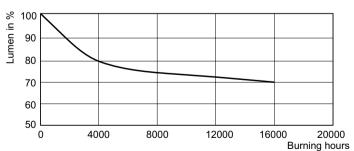

Life Expectancy Diagram - HPL-N 250W/542 E40 1SL/12

Lumen Maintenance Diagram - HPL-N 250W/542 E40 1SL/12

## HPL-N



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. All trademarks are owned by Signify Holding or their respective owners.