



MASTER HPI Plus

MASTER HPI Plus 400W/645 BU E40 1SL/6

Quartz metal halide lamps with opalized outer bulb

Product data

General Information	
Cap base	E40 [E40]
Burning Position	H15 [Hanging +/-15D or Base Up (BU)]
Life to 5% failures (nom.)	5000 h
Life to 10% failures (nom.)	7500 h
Life to 20% failures (nom.)	11000 h
Life to 50% failures (nom.)	20000 h
System description	Base-Up
LSF 2000 h Rated	99 %
LSF 4000 h Rated	96 %
LSF 6000 h Rated	93 %
LSF 8000 h Rated	88 %
LSF 12000 h Rated	76 %
LSF 16000 h Rated	63 %
LSF 20000 h Rated	50 %
Light Technical	
Colour Code	645 [CCT of 4,500 K]
Lamp Luminous Flux (Nom)	32500 lm
Colour Designation	Cool White (CW)
Chromaticity coordinate X (nom.)	367
Chromaticity coordinate Y (nom.)	374
Colour Temperature, horizontal (Nom)	4500 K
Lamp Luminous Efficacy EM (Nom)	80 lm/W
Colour Rendering Index, horiz (Nom)	65
LLMF 2000 h Rated	90 %

LLMF 4000 h Rated	82 %
LLMF 6000 h Rated	77 %
LLMF 8000 h Rated	73 %
LLMF 12000 h Rated	68 %
LLMF 16000 h Rated	63 %
LLMF 20000 h Rated	60 %
Ratio Scotopic/Photopic Lumens	1.50

Operating and Electrical

Power (Rated) (Nom)	405 W
Lamp current run-up (max.)	6 A
Lamp current (EM) (nom.)	3.4 A
Ignition peak voltage (max.)	5000 V
Ignition supply voltage (min.)	198 V
Ignition time (max.)	30 s
Voltage (Max)	135 V
Voltage (Min)	115 V
Voltage (Nom)	125 V

Controls and Dimming

Dimmable	No
----------	----

Mechanical and Housing

Bulb finish	Coated glass
-------------	--------------

MASTER HPI Plus

Approval and Application

Energy efficiency label (EEL)	A
Mercury (Hg) content (nom.)	67 mg
Energy Consumption kWh/1000 h	446 kWh

Luminaire Design Requirements


Bulb temperature (max.)	350 °C
Cap base temperature (max.)	250 °C

Product Data

Full product code	871150018252410
-------------------	-----------------

Order product name	MASTER HPI Plus 400W/645 BU E40 1SL/6
EAN/UPC – product	8711500182524
Order code	18252410
Numerator – quantity per pack	1
Numerator – packs per outer box	6
Material no. (12NC)	928074309891
Net weight (piece)	259.000 g
ILCOS Code	ME-400/45/2A-H-E40-/V


Dimensional drawing




HPI Plus 400W/645 BU E40

Product	D (max)	C (max)
MASTER HPI Plus 400W/645 BU E40 1SL/6	122 mm	290 mm

Photometric data

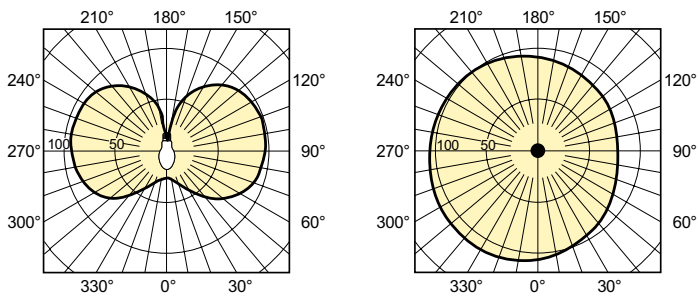


LDLD_HPI-Light distribution diagram

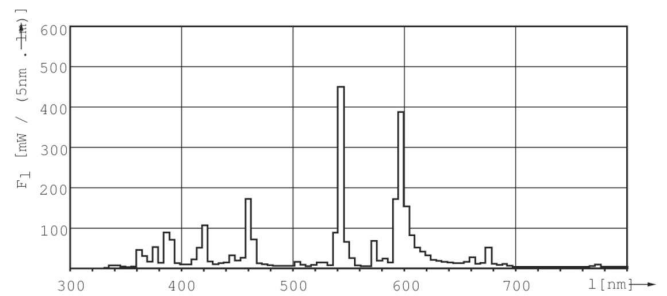

LDPB_HPI_Plus_250W_400W-Spectral power distribution B/W


MASTER HPI Plus

Photometric data

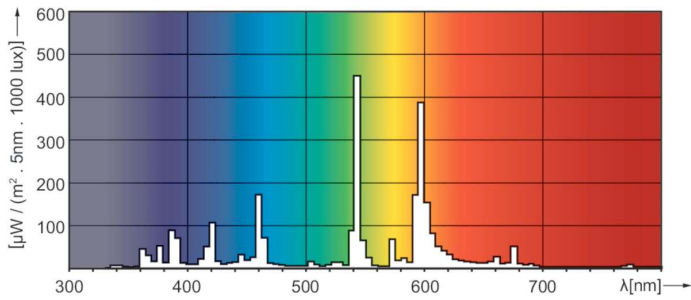


LDPO_HPI_Plus_250W_400W-Spectral power distribution Colour

Lifetime

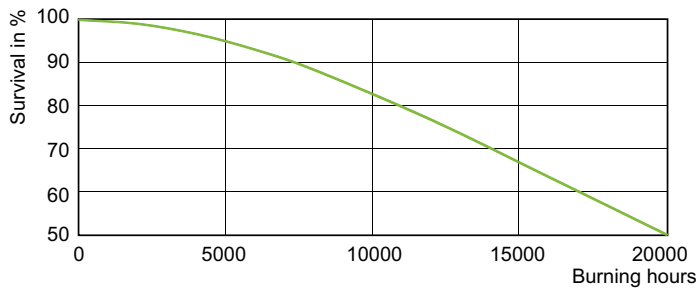

LDLE_HPI_250W_400W-Life expectancy diagram

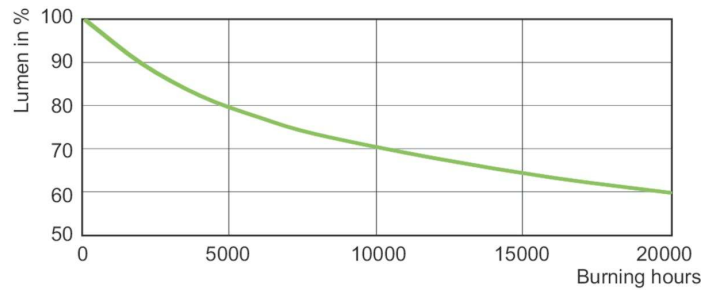

LDLM_HPI_250W_400W-Lumen maintenance diagram

