



MasterColor CDM-T6

CDM150/T6/830 12PK

MasterColor CDM lamp gives a unique combination of unbeatable light quality and consistent performance over lifetime while keeping running costs low. The Philips MasterColor Tubular Single-Ended T6 lamp is a compact, energy efficient, ceramic metal halide lamp that provides crisp, sparkling light.

Product data

General Information		Chromaticity Coordinate Y (Nom)	
Base	G12 [G12]	Chromaticity Coordinate Y (Nom)	0.396
Operating Position	Universal [Universal]	Correlated Color Temperature (Nom)	3000 K
Life to 5% Failures (Nom)	9000 h	Luminous Efficacy (rated) (Nom)	88 lm/W
Life To 10% Failures (Nom)	10000 h	Color Rendering Index (Nom)	88
Life to 20% Failures (Nom)	11000 h	Operating and Electrical	
Life to 50% Failures (Nom)	12000 h	Power (Rated) (Nom)	147 W
ANSI Code HID	C142/E	Lamp Current Run-Up (Max)	2.5 A
Light Technical		Lamp Current (EM) (Nom)	1.8 A
Color Code	830 [CCT of 3000K]	Ignition Supply Voltage (Max)	198 V
Luminous Flux (Rated) (Min)	11700 lm	Ignition Peak Voltage (Max)	5000 V
Luminous Flux (Rated) (Nom)	13000 lm	Ignition Supply Voltage (Min)	198 V
Color Designation	Warm White (WW)	Ignition Peak Voltage (Min)	3500 V
Lumen Maintenance 10000 h (Nom)	60 %	Re-Ignition Time (Min) (Max)	15 min
Lumen Maintenance 2000 h (Min)	65 %	Ignition Time (Max)	30 s
Lumen Maintenance 2000 h (Nom)	75 %	Voltage (Max)	106 V
Lumen Maintenance 5000 h (Min)	60 %	Voltage (Min)	86 V
Lumen Maintenance 5000 h (Nom)	70 %	Voltage (Nom)	96 V
Chromaticity Coordinate X (Nom)	0.436		

MasterColor CDM-T T6

Controls and Dimming

Dimmable	No
Run-Up Time 90% (Max)	3 min

Mechanical and Housing

Bulb Finish	Clear
-------------	-------

Approval and Application

Energy Efficiency Label (EEL)	A+
Mercury (Hg) Content (Nom)	14.3 mg
Energy Consumption kWh/1000 h	162 kWh

UV

Pet (Niosh) (Min)	8 h/500lx
Damage Factor D/fc (Max)	0.3

Luminaire Design Requirements


Bulb Temperature (Max)	650 °C
Cap-Base Temperature (Max)	280 °C
Pinch Temperature (Max)	350 °C

Product Data

Order product name	CDM150/T6/830 12PK
EAN/UPC - Product	046677232726
Order code	232728
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	928083705115
Net Weight (Piece)	0.033 kg
ILCOS Code	MT/UB-150/830-H-G12-21/100

Warnings and Safety

Dimensional drawing





CDM-T 150W/830 G12

Product

CDM150/T6/830 12PK


Photometric data

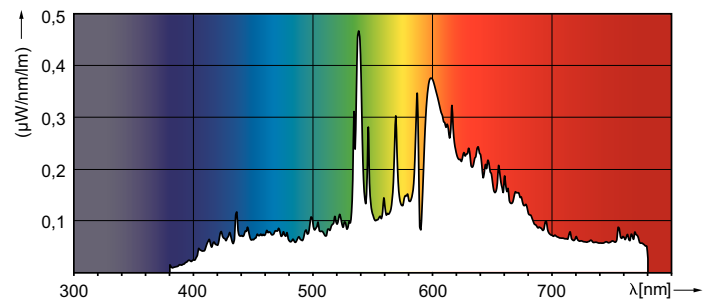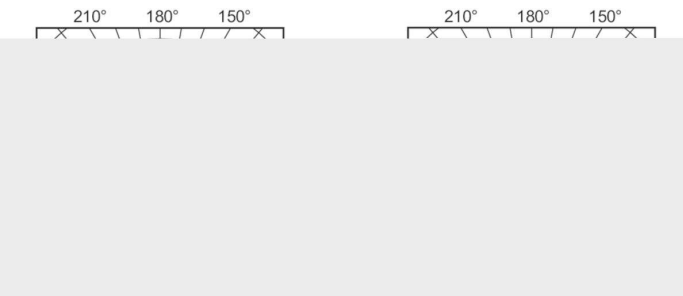

LDPO_CDM-T_150W_830-Spectral power distribution Colour

MasterColor CDM-T T6

Lifetime

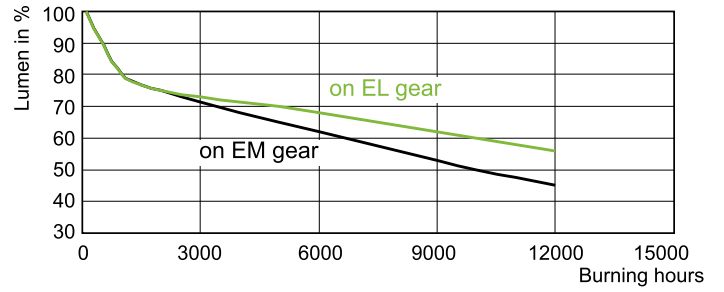

LDLM_CDM-T_150W_830-Lumen maintenance diagram

