



MSR

MSR 1200/2.1CT/3

The high color rendering index of the single ended MSR series ensures that everyone in the audience can enjoy the true colors of the scenery, the stage props, the players and their costumes – in fact everything that is on stage can be made bright and vivid in daylight quality light. Also, thanks to the single ended lamp concept, the luminaire has optimal light collection and direction possibilities to help ensure brightness on stage exactly where and when it is needed. In addition, the MSR can be used in any burning position for easy set-up and convenience.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


General information		Color Rendering Index (Nom)	
Cap-Base	G22 [G22]		85
Operating Position	UNIVERSAL [Any or Universal (U)]	Operating and electrical	
Main Application	Studio/Disco	Power (Nom)	1200 W
Life to 50% Failures (Nom)	800 h	Lamp Current (Nom)	13.8 A
System Description	Cold Strike	Ignition Supply Voltage (Min)	207 V
Light technical		Controls and dimming	
Color Code	2	Dimmable	No
Luminous Flux (Nom)	104000 lm	Mechanical and housing	
Chromaticity Coordinate X (Nom)	302	Cap-Base Information	30 mm x 53 mm
Chromaticity Coordinate Y (Nom)	320	Luminaire design requirements	
Correlated Color Temperature (Nom)	7200 K	Bulb Temperature (Max)	700 °C
Luminous Efficacy (rated) (Nom)	87 lm/W		

MSR

Pinch Temperature (Max)	350 °C
Pinch Temperature (Max)-DUP(do not use)	350 °C
Product data	
Full product code	872790091133600
Order product name	MSR 1200/2.1CT/3
EAN/UPC - Product	8727900911336
Order code	928171805114

Numerator - Quantity Per Pack	1
Local code description	MSR 1200/2.1CT/3
Numerator - Packs per outer box	3
Material Nr. (12NC)	928171805114
Net Weight (Piece)	0.150 kg


Dimensional drawing




MSR 1200/2.1CT/3

Product	D (max)	O	L (min)	L (max)	L	C (max)	F
MSR 1200/2.1CT/3	40 mm	10.0 mm	84 mm	86 mm	85 mm	175 mm	53 mm

Photometric data

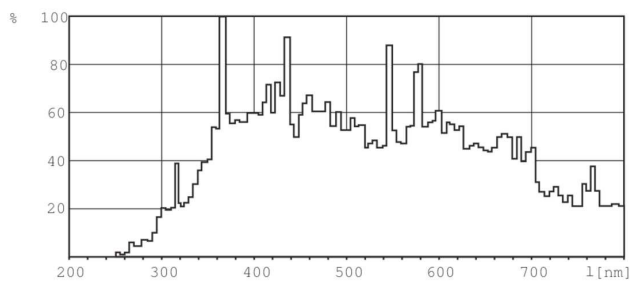

XDPB_XDMSR_CS-Spectral power distribution B/W

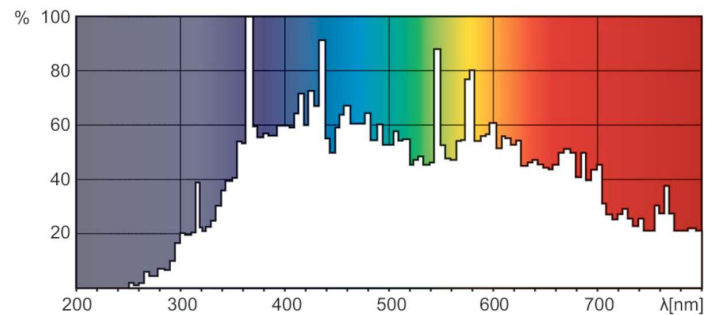

XDPO_XDMSR_CS-Spectral power distribution Colour

