



MASTER HPI-T Plus

MASTER HPI-T Plus 250W/645 E40 1SL/12

Quartz metal halide lamps with clear outer bulb

Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- · Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- · For use with control gear designed for high-pressure mercury or sodium lamps
- For use with control gear designed for high-pressure mercury or sodium lamps
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information				
Cap-Base	E40			
Operating Position	P20 [Parallel +/-20D or Horizontal(HOR)]			
Life to 50% Failures (Nom)	20,000 hour(s)			
Light Technical				
Color Code	645 [CCT of 4500K]			
Color Designation	Cool White (CW)			
Chromaticity Coordinate X (Nom)	365			
Chromaticity Coordinate Y (Nom)	377			
Correlated Color Temperature (Nom)	4500 K			
Luminous Efficacy (rated) (Nom)	79 lm/W			

Color rendering index (CRI)	65
Arc Length O (Nom)	29 mm
Operating and Electrical	
Power Consumption	247 W
Voltage (Nom)	128 V
Voltage (Nom)	128 V
Controls and Dimming	
Dimmable	No


Datasheet, 2023, April 14 data subject to change

MASTER HPI-T Plus

Mechanical and Housing	
Bulb Finish	Clear
Bulb Shape	T46
Approval and Application	
Mercury (Hg) Content (Nom)	36 mg
Energy Consumption kWh/1000 h	272 kWh
Product Data	
Order product name	MASTER HPI-T Plus 250W/645 E40 1SL/12


Full product name	MASTER HPI-T Plus 250W/645 E40 1SL/12			
Full product code	871150017989015			
Order code	928481300098			
Material Nr. (12NC)	928481300098			
Numerator - Quantity Per Pack	1			
EAN/UPC - Product/Case	8711500179890			
Numerator - Packs per outer box	12			
EAN/UPC - Case	8711500182975			


Dimensional drawing




Product	D (max)	0	L	C (max)
MASTER HPI-T Plus 250W/645 E40 1SL/12	47 mm	29 mm	155 mm	255 mm

Photometric data





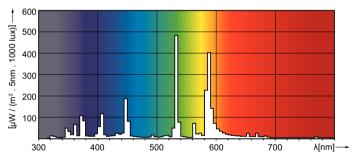



Light Distribution Diagram - MASTER HPI-T Plus 250W/645 E40 1SL/12

Spectral Power Distribution Colour - MASTER HPI-T Plus 250W/645 E40 1SL/12

MASTER HPI-T Plus

Lifetime

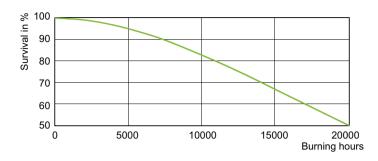

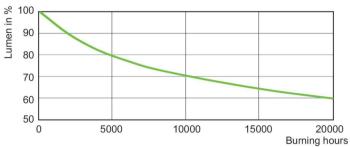

Life Expectancy Diagram - MASTER HPI-T Plus 250W/645 E40 1SL/12

Lumen Maintenance Diagram - MASTER HPI-T Plus 250W/645 E40 1SL/12

