

PHILIPS

Lighting



HPI-T

HPI-T 1000W/543 E40 1SL/4

Quartz metal halide lamps with clear outer bulb

Product data

General Information	
Cap base	E40 [E40]
Operating position	P [Parallel or Horizontal(HOR)]
Life to 5% failures (nom.)	3000 h
Life to 10% failures (nom.)	5500 h
Life to 20% failures (nom.)	8000 h
Life to 50% failures (nom.)	12000 h
System description	na [-]

Light Technical	
Colour code	543 [CCT of 4,300 K]
Luminous flux (rated) (min.)	79000 lm
Luminous flux (rated) (nom.)	85000 lm
Colour designation	Cool White (CW)
Lumen maintenance 10,000 hours (nom.)	75 %
Lumen maintenance 2,000 hours (nom.)	87 %
Lumen maintenance 5,000 hours (nom.)	80 %
Chromaticity coordinate X (nom.)	370
Chromaticity coordinate Y (nom.)	380
Correlated colour temperature (nom.)	4300 K
Luminous efficacy (rated) (nom.)	86 lm/W
Color rendering index (nom.)	57

Operating and Electrical	
Lamp supply voltage	220 V [220]
Power (Rated) (Nom)	985.0 W

Lamp current run-up (max.)	14.2 A
Lamp current (EM) (nom.)	8.25 A
Ignition supply voltage (max.)	198 V
Ignition supply voltage (min.)	198 V
Ignition time (max.)	30 s
Voltage (Max)	140 V
Voltage (Min)	120 V
Voltage (Nom)	130 V

Controls and Dimming	
Dimmable	no

Mechanical and Housing	
Bulb finish	Clear

Approval and Application	
Energy efficiency label (EEL)	A
Mercury (Hg) content (nom.)	86 mg
Energy Consumption kWh/1000 h	1084 kWh

Luminaire Design Requirements	
Bulb temperature (max.)	555 °C
Cap base temperature (max.)	300 °C

Product Data	
Full product code	871150018373645


HPI-T

Order product name	HPI-T 1000W/543 E40 1SL/4
EAN/UPC – product	8711500183736
Order code	18373645
Local Code	1000HPIT
Numerator – quantity per pack	1

Numerator – packs per outer box	4
Material no. (12NC)	928482600096
Net weight (piece)	0.426 kg

Warnings and Safety


Dimensional drawing



Product
HPI-T 1000W/543 E40 1SL/4

HPI-T 1000W/543 E40

Photometric data

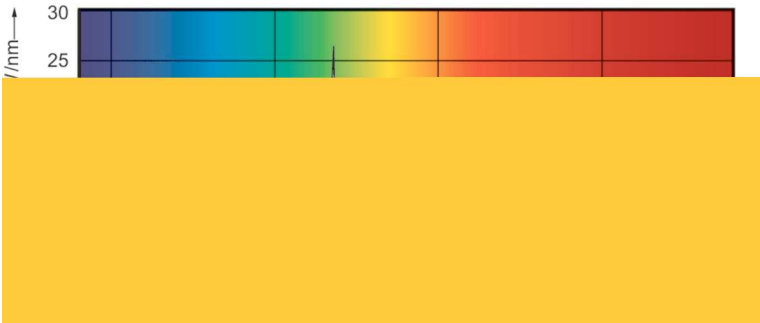

Lifetime

