



# Xitanium LED Driver Outdoor Dimmable (US)

## Xitanium 150W 347-480V 0.70A 0-10V

Xitanium Outdoor LED Drivers are available in wattages from 40W to 150W for hard-wire integration into outdoor luminaires for the most rugged applications. These drivers operate to specification under wide temperature and electrical ranges to ensure reliability. 1-10V dimming enables luminaires to be easily connected to a wide variety of sensors and control systems to facilitate dimming, thus maximizing energy savings.

### Product data

General Information	
Lighting Technology	LED
Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Total Harmonic Distortion IEC (Max)	20 %
Power Consumption	167 W
Output Current (Nom)	700 mA
Output Current Tolerance (Max)	5 %
Output Current Tolerance (Min)	-5 %
Input Current (Max)	500 mA
Output Power (Nom)	150 W


Wiring	
Output Wire Length	270.0 mm
Temperature	
T-Case Maximum (Max)	80 °C
Controls and Dimming	
Control Interface	0-10V
Dimming Range	100-10 %
Approval and Application	
Approval Marks	RoHS compliance UL certificate CSA certificate
Product Data	
Order product name	Xitanium 150W 347-480V 0.70A 0-10V
Full product name	Xitanium 150W 347-480V 0.70A 0-10V

Xitanium LED Driver Outdoor Dimmable (US)

Full product code	871869690036900
Order code	929000724813
Material Nr. (12NC)	929000724813
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	781087137505

Numerator - Packs per outer box	10
EAN/UPC - Case	50781087137517

Dimensional drawing

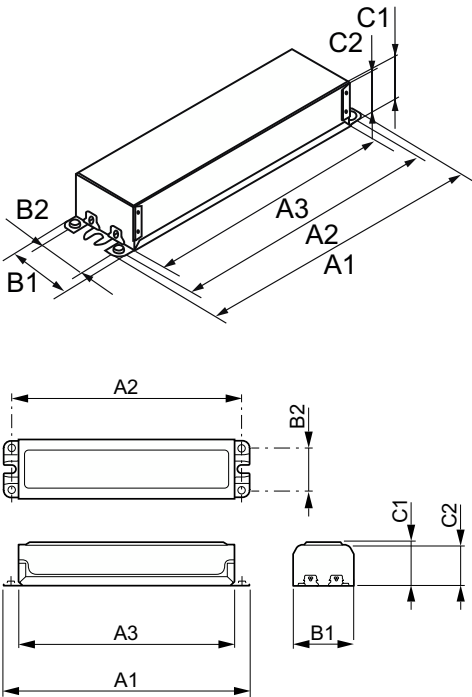

Product	D1	B2	C1	C2	A1	A2	B1
Xitanium 150W	4.8 mm	42.9	39.7	37.7	240.5	241.5	59.1
347-480V 0.70A		mm	mm	mm	mm	mm	mm
0-10V							

Product	D1	B2	C1	C2	A1	A2	B1
Xitanium 150W	4.8 mm	42.9	39.7	37.7	240.5	241.5	59.1
347-480V 0.70A		mm	mm	mm	mm	mm	mm
0-10V							

