



CorePro LED PLC

CorePro LED PLC CorePro LED PLC 9W 830 4P G24q-3

Philips CorePro LED PLC is the ideal uplamping solution for downlights in a wide range of general lighting applications. It integrates a LED light source into a traditional fluorescent form factor to offer superb energy savings over a lifetime that's twice as long as fluorescent alternatives.

Product data


General Information		Power factor (nom.)	
Cap base	G24Q-3 [G24q-3]		0.9
Nominal lifetime (nom.)	30000 h	Voltage (Nom)	20-50 V
Switching cycle	50000X	Temperature	
B50L70	30000 h	T ambient (max.)	35 °C
Light Technical		T ambient (min.)	-20 °C
Colour code	830 [CCT of 3,000 K]	T storage (max.)	65 °C
Luminous flux (nom.)	950 lm	T storage (min.)	-40 °C
Luminous flux (rated) (nom.)	950 lm	T-Case maximum (nom.)	76 °C
Correlated colour temperature (nom.)	3000 K	Controls and Dimming	
Colour consistency	<6	Dimmable	no
Color rendering index (nom.)	83	Mechanical and Housing	
LLMF at end of nominal lifetime (nom.)	70 %	Product length	200 mm
Operating and Electrical		Approval and Application	
Input frequency	30000-80000 Hz	Energy efficiency label (EEL)	A+
Power (Rated) (Nom)	9 W	Energy-saving product	Yes
Lamp current (max.)	400 mA	Approval marks	CE marking RoHS compliance KEMA Keur certificate
Lamp current (min.)	250 mA		
Starting time (nom.)	0.5 s		
Warm-up time to 60% light (nom.)	0.5 s		

CorePro LED PLC

Energy Consumption kWh/1000 h	12 kWh
Product Data	
Full product code	871869654115900
Order product name	CorePro LED PLC CorePro LED PLC 9W 830 4P G24q-3
EAN/UPC – product	8718696541159

Order code	54115900
Numerator – quantity per pack	1
Numerator – packs per outer box	10
Material no. (12NC)	929001200802
Net weight (piece)	0.088 kg


Dimensional drawing

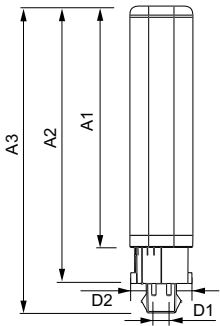


LEDtube PLC 9W G24q-3/830 4P

Product	D1	D2	A1	A2	A3
CorePro LED PLC CorePro LED PLC 9W 830 4P G24q-3	24.3 mm	28.4 mm	128.8 mm	148 mm	163.6 mm


Photometric data



General Uniform Lighting
1 x PLC 9W 830 4P G24q-3


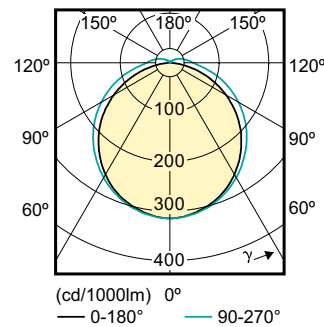


LEDtube PLC 100mm 9W G24Q-3 830 950lm

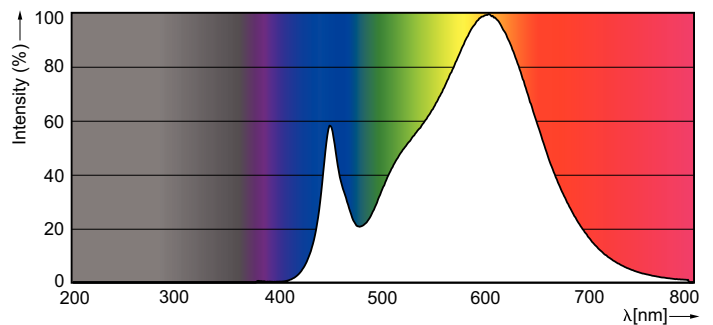



CorePro LED PLC

Lifetime

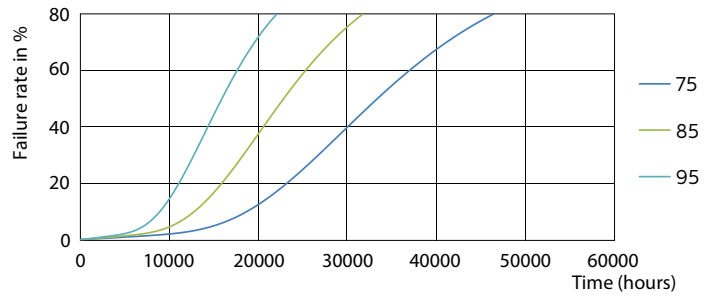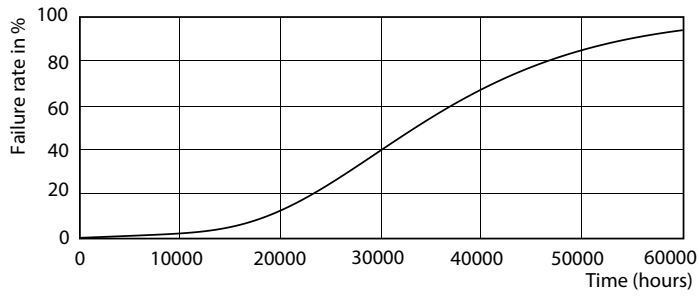


LEDtube PLC 100mm 9W G24Q-3 830 950lm

LEDtube PLC 100mm 9W G24Q-3 830 950lm

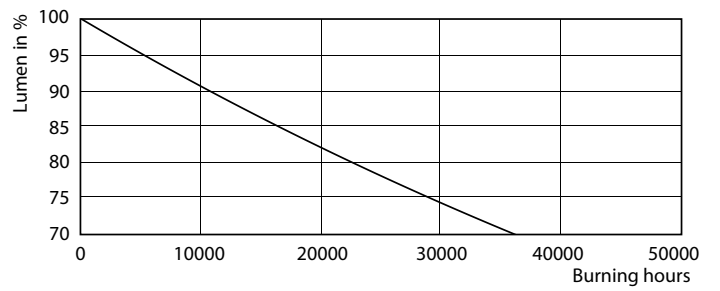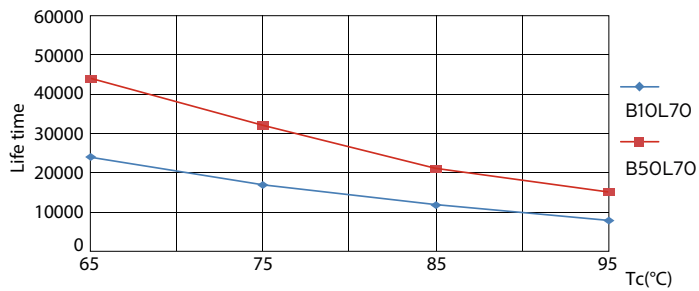

LEDtube PLC 100mm 9W G24Q-3 830 950lm

LEDtube PLC 100mm 9W G24Q-3 830 950lm

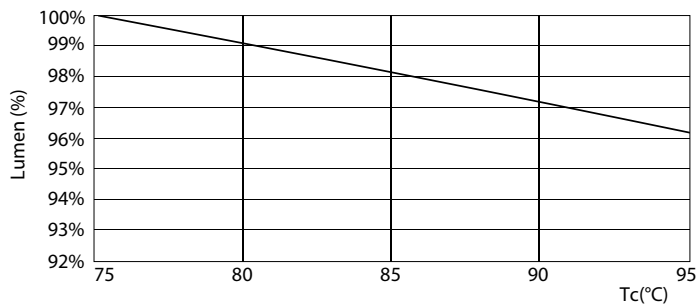

LEDtube PLC 100mm 9W G24Q-3 830 950lm

CorePro LED PLC

