



MASTER LEDspot MV

MAS LED spot VLE D 4.9-50W GU10 927 36D

Delivering a warm, halogen-like accent beam, MASTER LEDspot MV is a perfect fit for spot lighting (track, corridors, lift lobbies, display cases and cabinets) in the hospitality industry. It is particularly suitable to public areas where the light is on 24/7, such as lobbies, corridors, stairwells. MASTER LEDspot MV delivers huge energy savings and minimizes maintenance cost without any compromise on brightness, enabling hospitality owners to achieve a return on their investment within one year. These LEDspots are compatible with most existing fixtures with a GU10 holder and designed as a retrofit replacement for halogen or incandescent spots. The dimmable versions drive further efficiencies, while helping to create the desired atmosphere.

Product data

General Information	
Base	GU10 [GU10]
Nominal Lifetime (Nom)	25000 h
Switching Cycle	50000X
Technical Type	4.9-50W
Light Technical	
Color Code	927
Beam Angle (Nom)	36 °
Initial lumen (Nom)	355 lm
Luminous Flux (Rated) (Nom)	355 lm
Luminous Intensity (Nom)	650 cd
Color Designation	Warm White (WW)
Rated Beam Angle	36 °
Correlated Color Temperature (Nom)	2700 K
Luminous Efficacy (rated) (Nom)	80.61 lm/W
Color Consistency	<6

Color Rendering Index (Nom)	90
LLMF At End Of Nominal Lifetime (Nom)	70 %
Luminous Flux in 90° Cone (Rated)	355 lm
Operating and Electrical	
Input Frequency	50 to 60 Hz
Power (Rated) (Nom)	4.9 W
Lamp Current (Nom)	27 mA
Wattage Equivalent	50 W
Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.8
Voltage (Nom)	220-240 V
Temperature	
T-Case Maximum (Nom)	80 °C

MASTER LEDspot MV

Controls and Dimming

Dimmable Yes

Approval and Application

Energy Efficiency Label (EEL) A+

Suitable For Accent Lighting Yes

Energy Consumption kWh/1000 h 5 kWh

Product Data


Order product name MAS LED spot VLE D 4.9-50W GU10 927 36D

EAN/UPC - Product	8718696707852
Order code	325365
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929001348802
Net Weight (Piece)	0.038 kg

Warnings and Safety

- Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights


Dimensional drawing

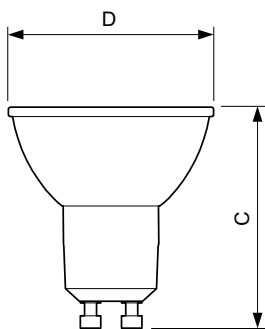


GU10 230V5W-50W 345lm 36D 2700K GU10 Dim

Product	D	C
MAS LED spot VLE D 4.9-50W GU10 927 36D	50 mm	54 mm

Photometric data




MASTER LEDspotMV 50W GU10 927 36D 355lm

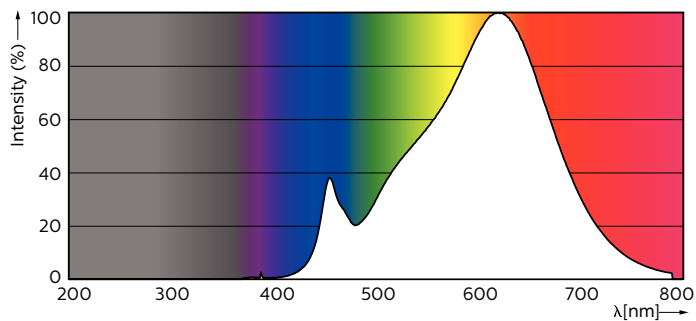

MASTER LEDspotMV 35W GU10 927 36D 260lm

MASTER LEDspot MV

Photometric data

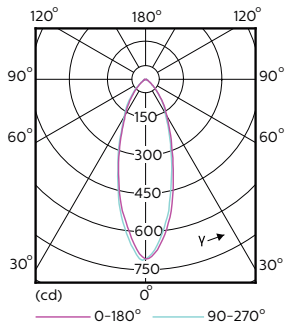

MASTER LEDspotMV 50W GU10 36D 355lm

Lifetime



MASTER LEDspotMV GU10 922-927 36D



MASTER LEDspotMV GU10 922-927 36D

