PHILIPS Lighting



CorePro LED PLC 2P

LED PLC 7.5W 840 2P G24d

CorePro LED PLC 2P integrates a LED light source into a traditional fluorescent form factor. This product is the ideal solution for uplamping in general lighting applications: it meets basic lighting requirements, offers significant energy savings, and is environmentally friendly.

Product data

General Information	
Cap-Base	G24d
Nominal lifetime	15,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
EU RoHS compliant	Yes
Light Technical	
Color Code	840 [CCT of 4000K]
Beam Angle (Nom)	240 degree(s)
Luminous Flux	806 lm
Color Designation	Cool White (CW)
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	107.00 lm/W
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom	n) 70 %

Operating and Electrical		
Line Frequency	50 to 60 Hz	
Input Frequency	50 to 60 Hz	
Power Consumption	7.5 W	
Lamp Current (Max)	57 mA	


Lamp Current (Min)	57 mA
Lamp Current (Nom)	57 mA
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.5
Voltage (Nom)	220-240 V
Temperature	
Ambient temperature range	-20 °C to 45 °C
T-Case Maximum (Nom)	64 °C
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Product Length	100 mm
Bulb Shape	PL-C
Approval and Application	
Energy Saving Product	Yes
Approval Marks	RoHS compliance CE marking KEMA Keur
	certificate

CorePro LED PLC 2P

Energy Consumption kWh/1000 h	- kWh
Product Data	
Order product name	LED PLC 7.5W 840 2P G24d
Full product name	LED PLC 7.5W 840 2P G24d
Full product code	871869681018700
Order code	929001879008

Material Nr. (12NC)	929001879008
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718696810187
Numerator - Packs per outer box	10
EAN/UPC - Case	8718696810194

Dimensional drawing




Product	D	A1	A2	A3
LED PLC 7.5W 840 2P G24d	37.2 mm	40 mm	92.5 mm	115 mm

Photometric data


		1 x \$299018799 7.5W 4090K
		1 × 904 im
Pair intensity dispan	Quantity estimation diagram	LGL deput
XX	Tax CES Advances UN Status Promounder 11	ti distanti ti distanti
MAX 1		
12880		
areas r	Uthene bounds	Langer Tele
Minderin 18	Ulation from the second second	Langest Film
Oken between		
100 a (100 100) 17		

Calculus? Processerio 4.5 Philips Lipting 8.V. Page:

General uniform lighting - LED PLC 7.5W 840 2P G24d

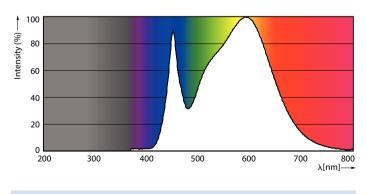


Spectral Power Distribution Colour - LED PLC 7.5W 840 2P G24d




Light Distribution Diagram - LED PLC 7.5W 840 2P G24d


CorePro LED PLC 2P



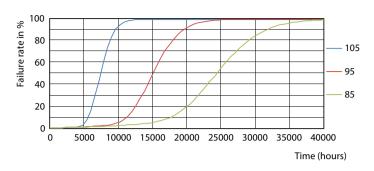


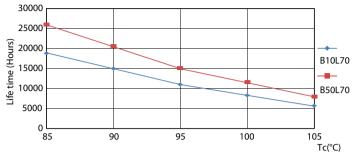



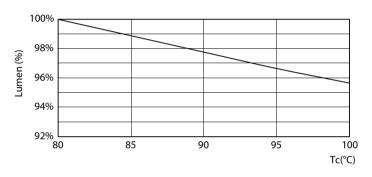



Lumen Maintenance Diagram - LED PLC 7.5W 840 2P G24d

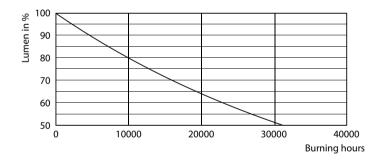

Lumen Maintenance Diagram - LED PLC 7.5W 840 2P G24d

Life Expectancy Diagram - LED PLC 7.5W 840 2P G24d

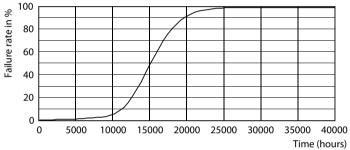



CorePro LED PLC 2P



© 2024 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2024, February 16 - data subject to change